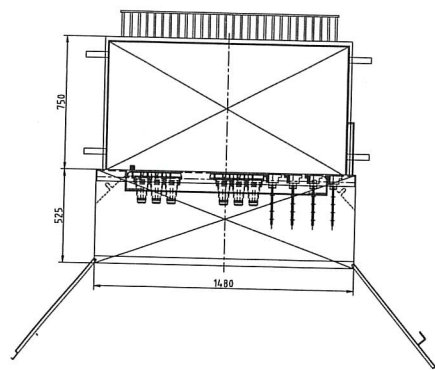
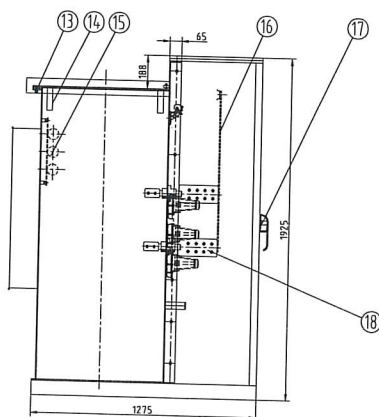
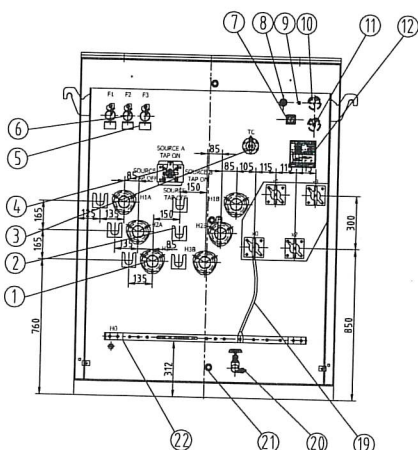


ITEM	WEIGHT(KG)
CORE WEIGHT	1038 KG
TOTAL OIL WEIGHT	997 KG
TOTAL WEIGHT	2925 KG

TECHNICAL DATA	
RATING	500kVA
PRIMARY VOLTAGE(V)	24940GRDY/14400
SECONDARY VOLTAGE(V)	600Grdy/347
FREQUENCY	60Hz
VECTOR GROUP	Yyn0
CONDUCTOR	ALUMINUM
PRIMARY BIL VOLTAGE	125kV
SECONDARY BIL VOLTAGE	30kV
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	3500W
NO LOAD LOSSES	980W
IMPEDANCE	4.0%
ALTITUDE	≤1000m
COLOR	MUBSELL NO.7.0 GY 3.2/1.5
CORE FORM	THREE-PHASE FIVE-COLUMN

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	HV BUSHING (25KV, 200A)	6
2	PARKING STAND BRACKET	6
3	TAP CHANGER(WSLI3 63/20-6x5)	1
4	FOUR POSITION LB SWITCH	1
5	DRIP TRAY	3
6	BAYONET FUSE(4000353C10M)	3
7	OIL LEVEL GAUGE	1
8	FILL PLUG	1
9	PRESSURE RELIEF VALVE	1
10	VACUUM PRESSURE GAUGE	1
11	OIL TEMPERATURE GAUGE	1
12	NAMEPLATE	1
13	FLIP TOP COVER	1
14	LIFTING LUG	4
15	ELSP FUSE(CBUC15065C100)	3
16	BUSHING SPADE SUPPORT	4
17	DOOR HANDLE	1
18	LV BUSHING(FTG1-1/1500,8 HOLE,BIL:30kV)	4
19	GROUND STRAP COPPER	1
20	1" DRAIN VALVE WITH 3/8" SAMPLER	1
21	PENTAHEAD BOLT ARRANGEMENT	3
22	CEA GROUND BRACKET	1

TYPE
ZGSL-H-500/24.94/0.6

DWG. NAME
General Assembly Drawing

DRAWN	CHECKED	CHECKED	APPROVED
Mike	Jack	Iris	Sam

FIRST ANGLE PROJECTION	SCALE	1
------------------------	-------	---

ZGS500-240223-02

JZP
POWER TRANSFORMER


REV. NO.

0

*Five legged core assembly

Handwritten signature

NOTE:
1. ALL DIMENSIONS ARE IN MILLIMETERS
2. MATERIAL: STAINLESS STEEL
3. THICKNESS : 1mm
4. LETTER COLOR: BLACK





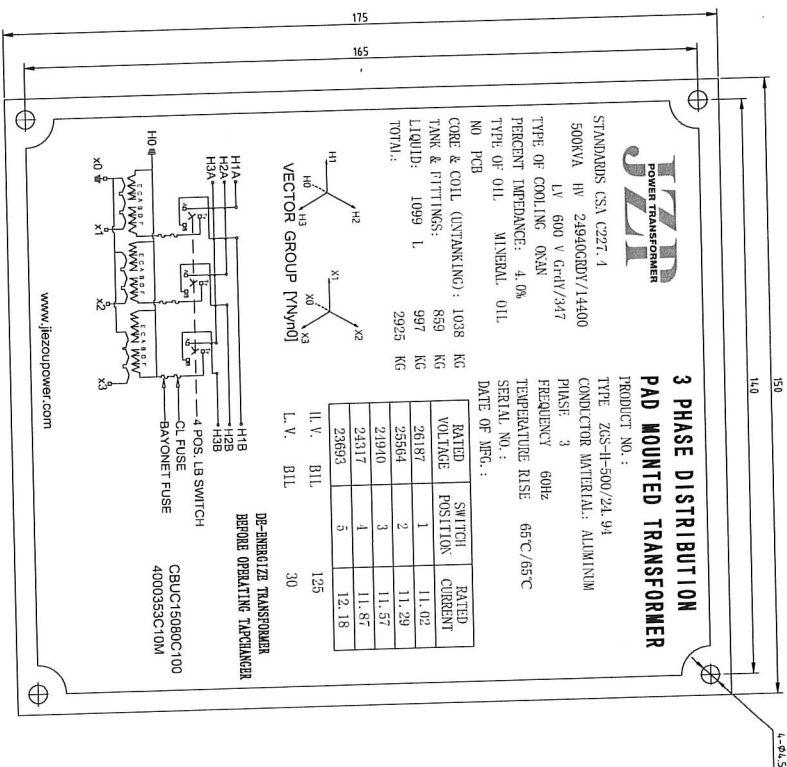


CHANGE

TYPE		DWG. NAME	
ZGSL-H-500/24.94/0.6		Name Plate	
FIRST ANGLE PROJECTION	SCALE	DRAWN	CHECKED
1	2		
2024-02-23		Mikelack	Iris



REF. NO.	DWG. NO.	REV. NO.
	ZGS500-24023-02	

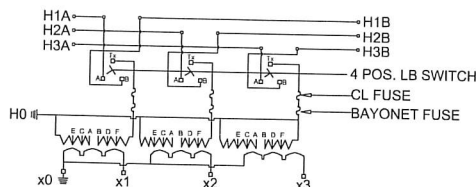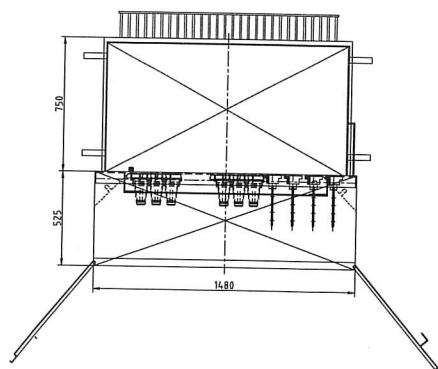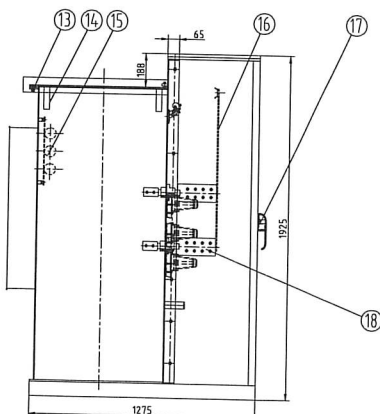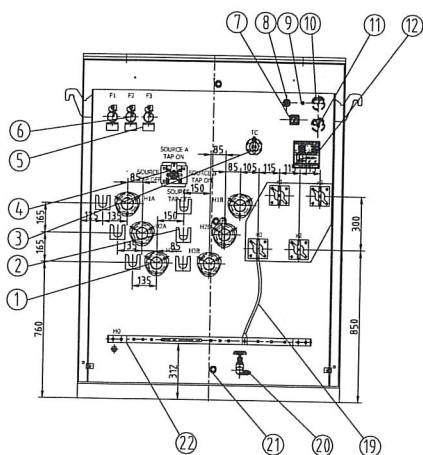

ITEM	WEIGHT(kg)
CORE WEIGHT	1038 KG
TOTAL OIL WEIGHT	997 KG
TOTAL WEIGHT	2925 KG

TECHNICAL DATA	
RATING	500kVA
PRIMARY VOLTAGE(V)	24940GRDY/14400
SECONDARY VOLTAGE(V)	208Grdy/120
FREQUENCY	60Hz
VECTOR GROUP	YNyn0
CONDUCTOR	ALUMINIUM
PRIMARY BIL VOLTAGE	125kV
SECONDARY BIL VOLTAGE	30kV
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	3500W
NO LOAD LOSSES	980W
IMPEDANCE	4.0%
ALTITUDE	≤1000m
COLOR	MUBSELL NO.7.0 GY 3.2/1.5
CORE FORM	THREE-PHASE FIVE-COLUMN


PARTS LIST		
ITEM	DESCRIPTION	QTY
1	HV BUSHING (25kV,200A)	6
2	PARKING STAND BRACKET	6
3	TAP CHANGER(WSL113 63/20-6x5)	1
4	FOUR POSITION LB SWITCH	1
5	DRIP TRAY	3
6	BAYONET FUSE(4000353C10M)	3
7	OIL LEVEL GAUGE	1
8	FILL PLUG	1
9	PRESSURE RELIEF VALVE	1
10	VACUUM PRESSURE GAUGE	1
11	OIL TEMPERATURE GAUGE	1
12	NAMEPLATE	1
13	FLIP TOP COVER	1
14	LIFTING LUG	4
15	ELSP FUSE(CBUC15065C100)	3
16	BUSHING SPADE SUPPORT	4
17	DOOR HANDLE	1
18	LV BUSHING(FTG1-1/1500,8 HOLE,BIL:30kV)	4
19	GROUND STRAP COPPER	1
20	1" DRAIN VALVE WITH 3/8" SAMPLER	1
21	PENTAHEAD BOLT ARRANGEMENT	3
22	CEA GROUND BRACKET	1

TYPE ZGSL-H-500/24.94/0.208				DWG. NAME General Assembly Drawing			
DRAWN	CHECKED	CHECKED	APPROVED	FIRST ANGLE PROJECTION	SCALE	1	
Mike	Jack	Iris	Sam				
ZGS500-240223-01							
				REV. NO.			

*Five legged core assembly!

SL

NOTE:
1.ALL DIMENSIONS ARE IN MILLIMETERS
2.MATERIAL:STAINLESS STEEL
3.THICKNESS :1mm
4.LETTER COLOR: BLACK

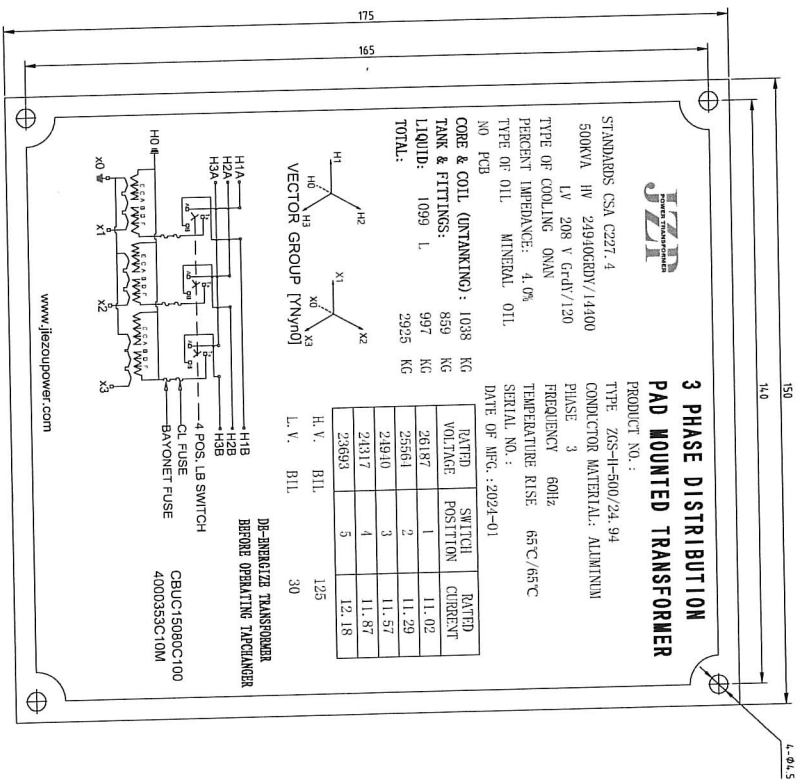

CHANGE

TYPE		DWG. NAME	
ZGSL-H-500/24.94/0.6		Name Plate	
FIRST ANGLE PROJECTION	SCALE 1/2	DRAWN	CHECKED
2024-02-23		MikeJack	Iris
		REV. DWG. NO.	APPROVED
		Sam	
		DWG. NO.	
		ZGS500-240223-01	

