
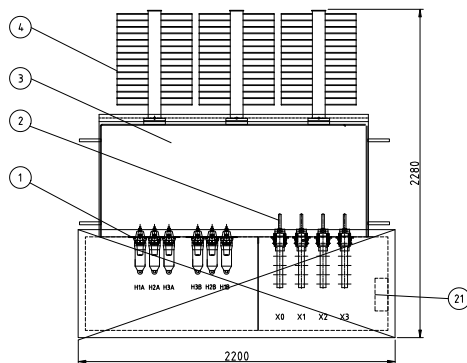
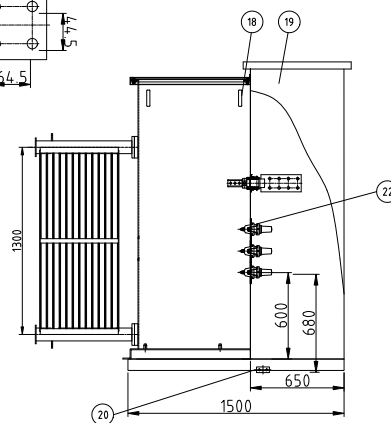



DWG. NO. ZGS2000-230817-01

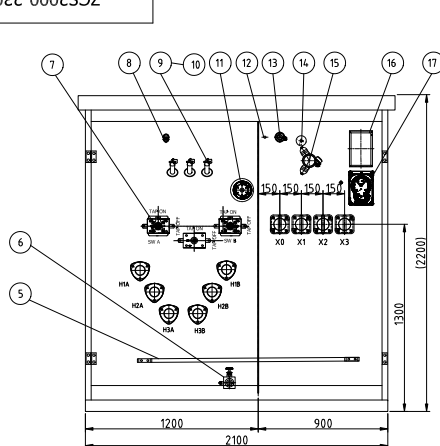


TECHNICAL DATA	
RATING	2000kVA
PRIMARY VOLTAGE	24940V
SECONDARY VOLTAGE	600V/346V
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
WINDING MATERIAL	Aluminum
LOAD LOSS AT RATED VOLTAGE	19500W Tol -8%~+10%
NO LOAD LOSSES	2650W Tol -12%~+15%
IMPEDANCE	5.75% Tol ±10%
ALTITUDE	≤1000m
No. OF TAPPOSITION	5
COLOR	Green
CORE FORM	Three-phase three column
INSULATING OIL	<2PPM PCB
FLUID	MINERAL OIL

ITEM	WEIGHT(Kg)
TANK & ACCESSORIES	4280
TOTAL OIL WEIGHT	1440
TOTAL WEIGHT	5720

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	HIGH VOLTAGE BUSHING (25KV,200A), Cooper	6
2	LV bushing (1.0KV 2500A)	4
3	TANK AND COVER ASSEMBLY	1
4	RADIATORS	3
5	Grounding copper bar	1
6	Oil drain valve (DN25)	1
7	Load Switch	3
8	Oil fill valve	1
9	High voltage backup current-limiting fuse 38KV140A	3
10	High voltage overload fuse 38KV,65A	3
11	Tap changer	1
12	Vent valve	1
13	Pressure relief device	1
14	Vacuum manometer (YZ-70)	1
15	Oil level Indicator (YZF-90)	1
16	Name plate	1
17	OIL THERMOMETER (BWY-803A)	1
18	LIFTING LUGS	4
19	Front compartment	1
20	Ground Stainless steel	1
21	Terminal box	1
22	Single-pass bushing insert(25KV,200A), Cooper	6

CHANGE



DWG. NAME
ZGS2000-24.94/0.6

DRAWN: CHECKED: APPROVED:
Mike W. Irs Ella W Sam

ZGS2000-230817-01


DWG. NAME
General Assembly Drawing

FIRST ANGLE PROJECTION SCALE 1



REV. NO.

0

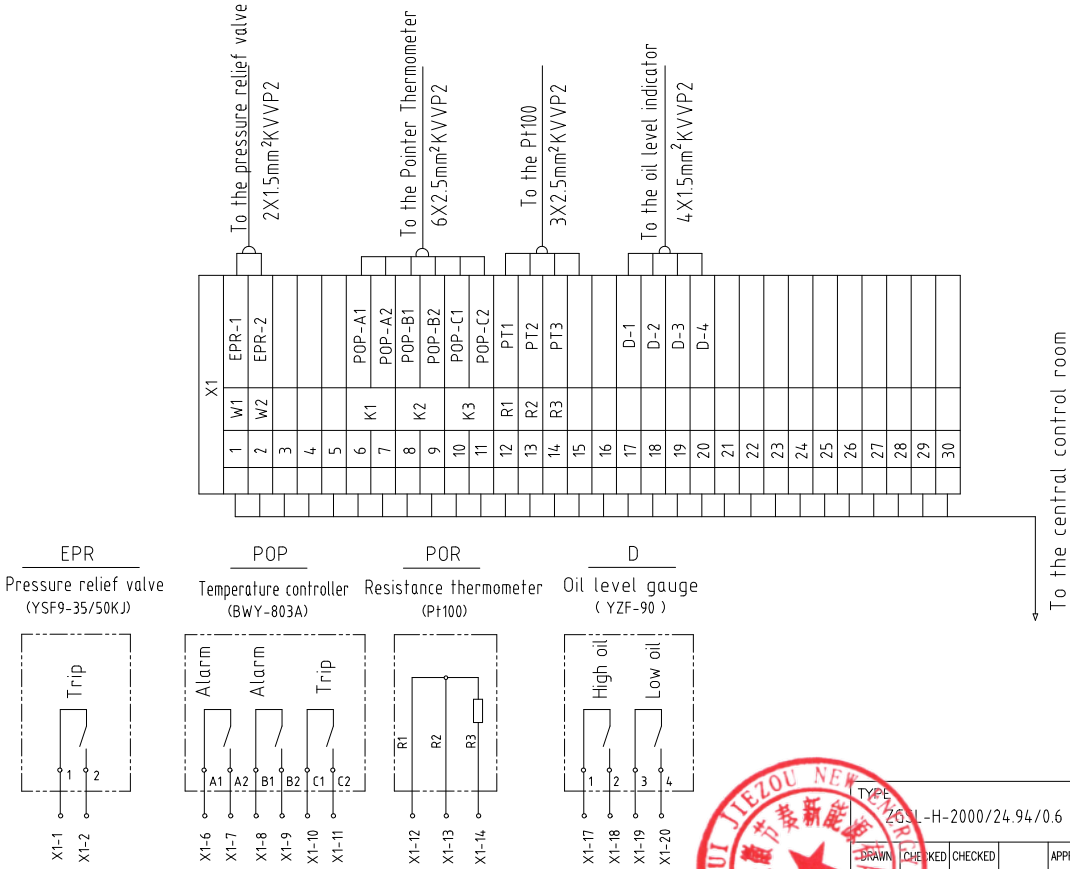

NOTE:
1.ALL DIMENSIONS ARE IN MILLIMETERS
2.MATERIAL:STAINLESS STEEL
3 THICKNESS :1mm
4.LETTER COLOR: BLACK

4- ϕ 4.5

ANHUI JIEZOU NEW ENERGY CO.,LTD
Pad-Mounted TRANSFORMER

APPLICATION	OUTDOOR	PRODUCT TYPE	ZGSL-H-2000/24.94/0.6
PHASES	3 PHASES	PRODUCT CODE	CSA C271.4
RATED FREQUENCY	60 HZ	COOLING METHOD	ONAN
RATED CAPACITY	2000 KVA	VECTOR GROUP	Dyn1
RATED VOLTAGE	HIGH VOLTAGE	2494.0 V	HIGH-LOW VOLTAGE
	LOW VOLTAGE	600/346.4 V	
RATED CURRENT	HIGH VOLTAGE	46.3 A	LIFTING WEIGHTS
	LOW VOLTAGE	1924.5 A	
INSULATION LEVEL	1710 3500.1	TOTAL WEIGHTS	5720 kg
	h.v LINE TERMINAL		l.v LINE TERMINAL
TAP CHANGER (HIGH VOLTAGE)	h.v LINE TERMINAL	u / AC	150 / 50
	l.v LINE TERMINAL	u / AC	30 / 10
NO.	RANGE	TAP VOLTAGE	TAP CONN.
1	+5.0%	26187	2-3
2	+2.5%	23564	3-4
3	RATED	24940	4-5
4	-2.5%	24316	5-6
5	-5.0%	22693	6-7
MATERIAL			
45# Sinopec			
<2PPI PCB			
HV/LV CONDUCTOR Aluminum/Aluminum			
TEMPERATURE RISE			
OIL 65°C			
WINDING 65°C			
TANK WITHSTAND VACUUM PRESSURE		40 kPa Positive 50 kPa Negative	