


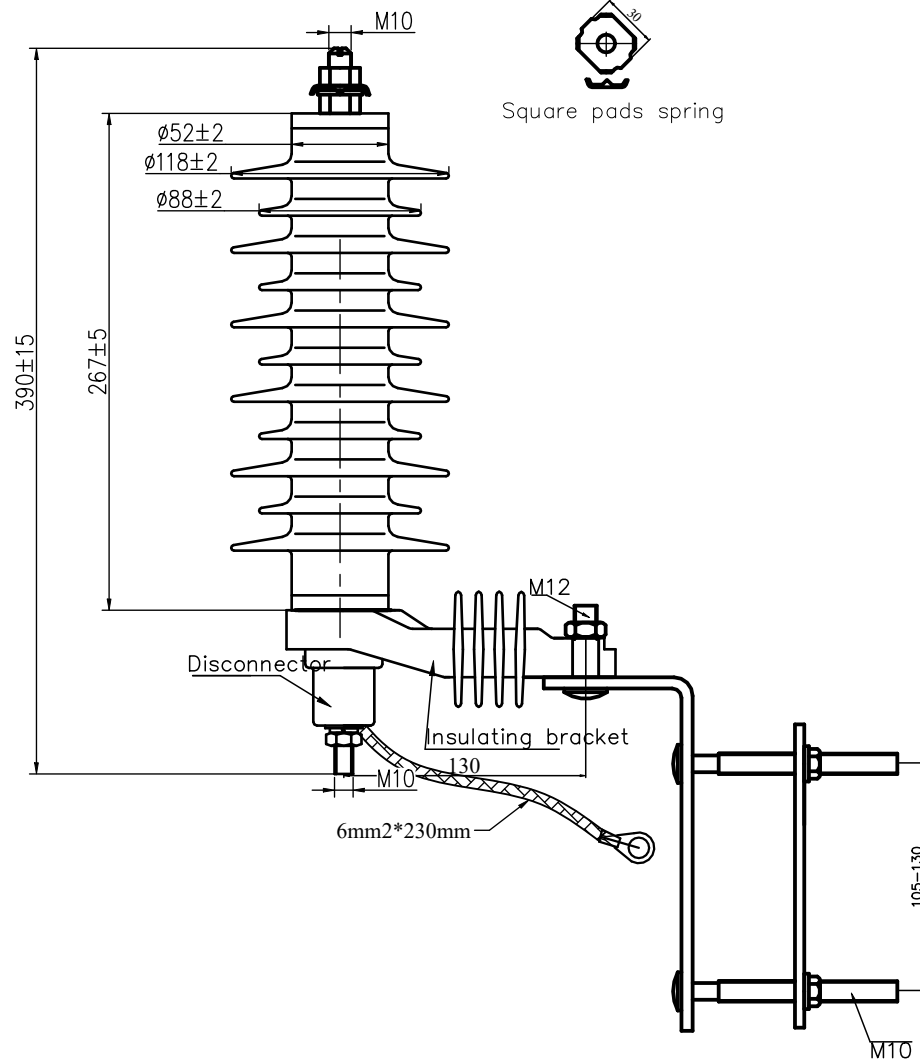

Technical Data:

Applicable standard IEC 60099-4; IEEE Std C62.11

1. Surge arrester rated voltage (U_r): 27.5kV;
2. Maximum continuous operating voltage (U_c): 22kV;
3. DC 1mA reference voltage: ≥ 41 kV;
4. Nominal discharge current: 5kA;
5. 2ms square wave current : 400A;
6. Lightning impulse residual voltage : 75kV ;
7. 4/10 μ S high current impulse: 100kA;
8. Creepage distance: 750mm;
9. Lightning Impulse Withstand Voltage: 150kV;
10. Power frequency withstand voltage 1min wet: 50kV;

备注Remark:			金属氧化物避雷器 Metal Oxide Lightning Arrester	YH10W-27.5	 南阳金牛电气有限公司 NANYANG JINNIU ELECTRIC CO.,LTD
	签名Autograph	日期Date			
设计Design		07.09.2023	外形图Outline Drawing		1
审核Verify		07.09.2023			
批准Ratify		07.09.2023			