



NO	SPEC	NAME	QTY	MATERIAL
1	8TH.002.000	φ12X31' conductive rod	1	Copper
2	8TH.024.099	1/2"nut	3	Brass
3	8TH.023.096	Flat pad	1	Brass
4	8TH.024.095	large flat pad	1	Stainless steel
5	8TH.019.502	ANSI-25/25C porcelain bottle	1	High pressure porcelain
6	φ92×φ68×4	Rectangular sealing ring	1	Nitrile rubber
7	8TH.017.108	Pressure plate	1	Aluminum alloy
8	8TH.003.1186	ANS terminal head	1	Brass
9	φ42Xφ15X3	Rectangular sealing ring	1	Nitrile rubber

SPECIFICATION

Power frequency withstand voltage 70kV/1min	Lightning impulse 150kV
Creepage distance ≥405mm	Cantilever resistance 1000N

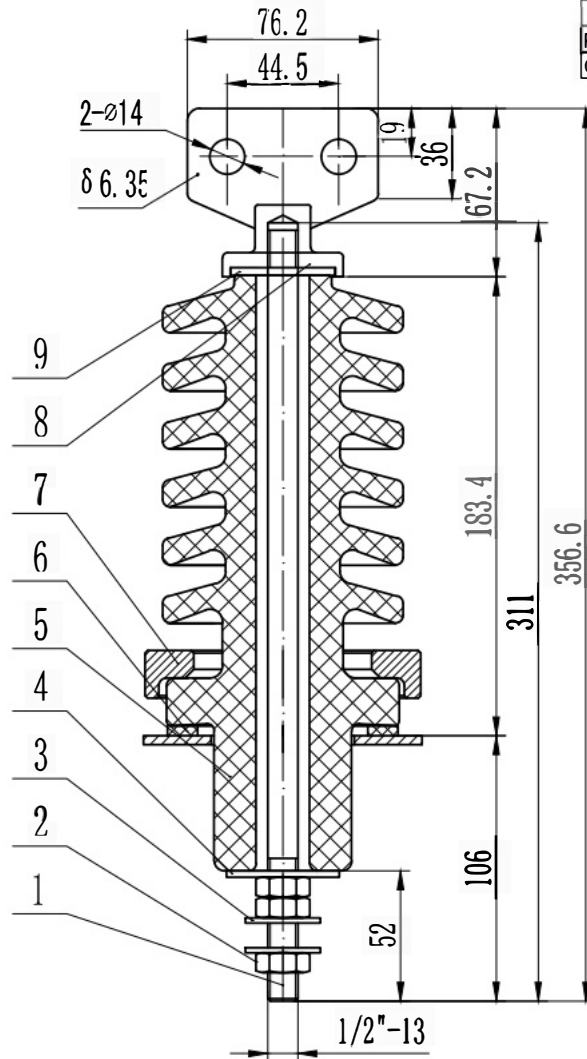

Pressure plate (installation) dimensions

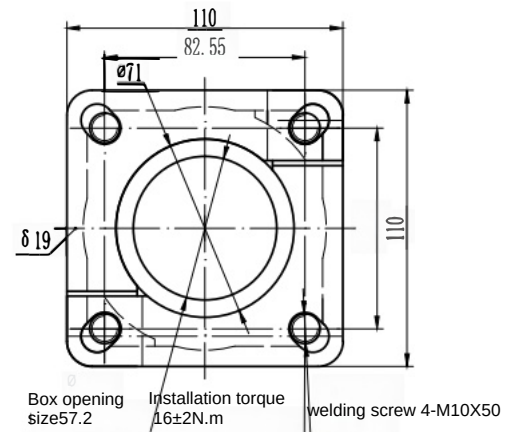

ANSI-27/208

TH. MGA. 000

ANSI HV BUSHING -27KV/208