


DWG.
NO.

ZGS1500-230727-01

ITEM	WEIGHT(Kg)
Body weight	1800
Tank & accessories	1540
Total oil weight	1260
Total weight	4600

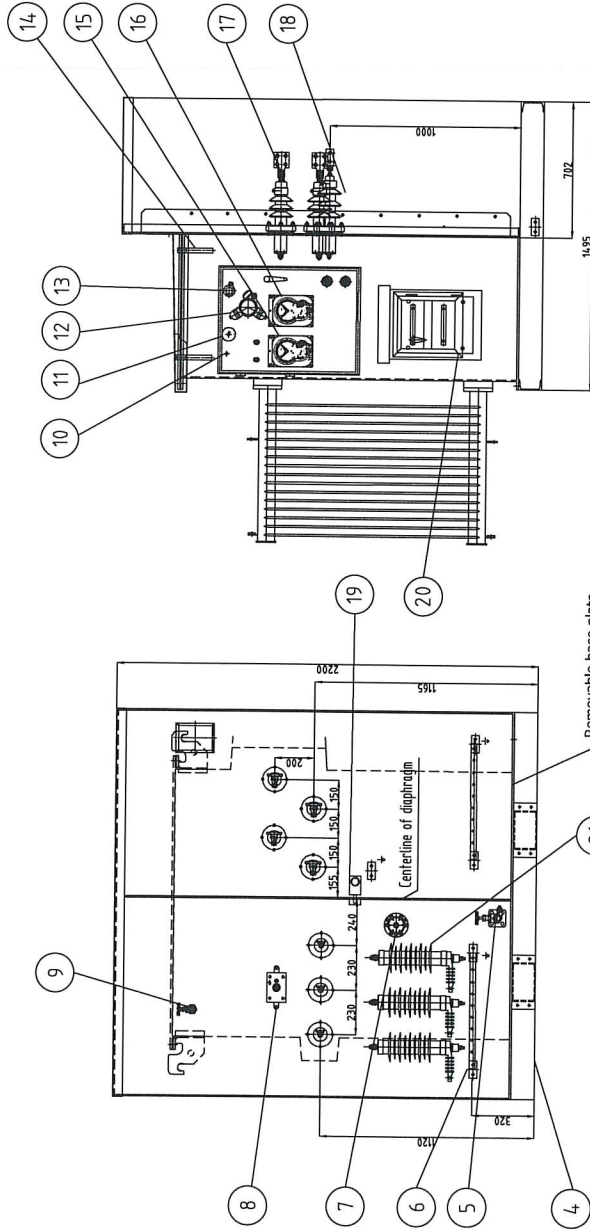

TECHNICAL DATA	
RATING	1500KVA
PRIMARY VOLTAGE	24940V
SECONDARY VOLTAGE	4160V/2402V
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
WINDING MATERIAL	Aluminum
LOAD LOSS AT RATED VOLTAGE	14500W Tol +5%
NO LOAD LOSSES	2000W Tol +5%
IMPEDANCE	5.75% Tol±10%
ALTITUDE	≤1000m
No. OF TAPPOSITION	5(±2×2.5%)
CORE FORM	Musell Green
INSULATING OIL	Three-phase three column
FLUID	<2PPM PCB
	MINERAL OIL

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	Front compartment	1
2	Tank and cover assembly	1
3	Radiators (PC1100-16/520)	3
4	Base	1
5	Oil drain valve	1
6	Ground Stainless steel	7
7	Tap changer	1
8	Load Switch	1
9	OIL FILL VALVE	1
10	Vent valve	1
11	Vacuum manometer (YZ-70)	1
12	Oil-level indicator (YZF-90)	1
13	Pressure relief device (YZF-35/25KJ)	1
14	LIFTING LUGS	4
15	OIL THERMOMETER (BWY-803A)	1
16	Winding thermometer (BWR-04AAW)	1
17	LV Through rod type casing	4
18	HV Through rod type casing	3
19	Type DM Access Interlock	1
20	Terminal box	1
21	Metal Oxide Surge Arrester	3
22		
23		


TYPE

ZGS-Z-1500/24.94/4.16

DWG. NAME

General Assembly Drawing

2

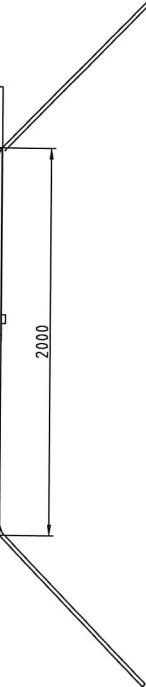

DRAWN	CHECKED	APPROVED	FIRST ANGLE PROJECTION	SCALE	1	25
Mike W	Iris J	Ella W	Sam			




DWG. NO.

ZGS1500-230727-01



REV. NO.

ZGS1500-230727-01

DWG.
NO.

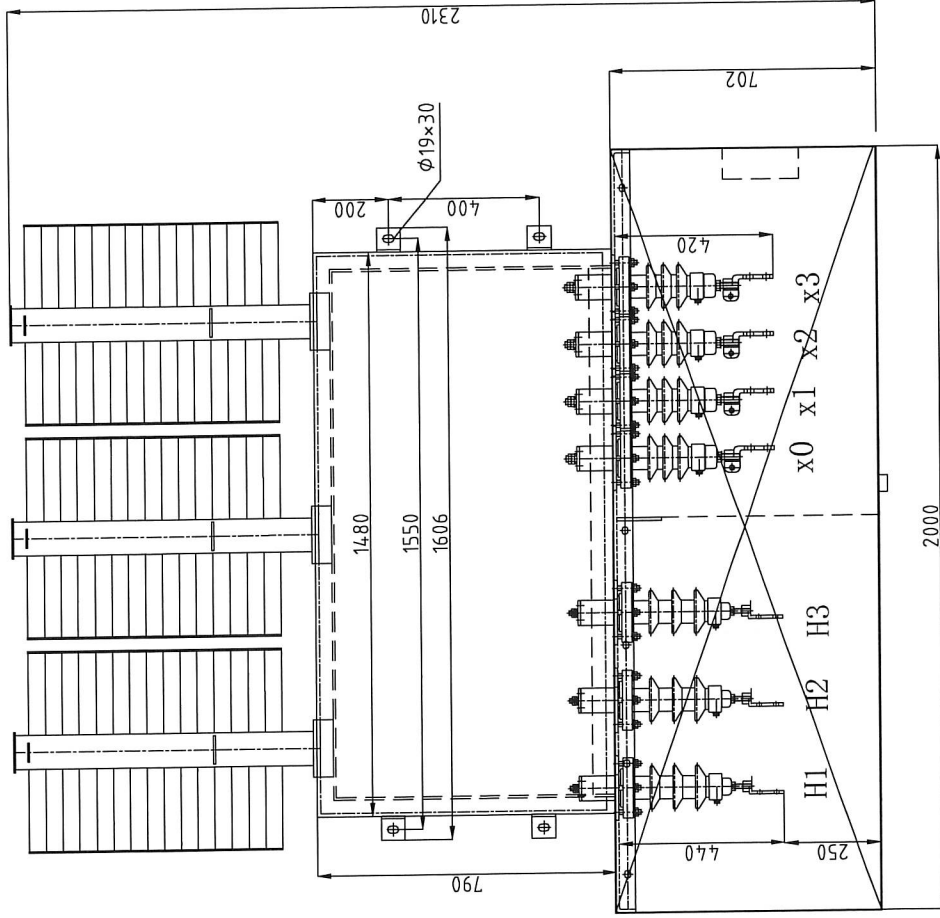

TYPE		DWG. NAME		Base Structure Drawing	
ZGS-Z-1500/24.94/4.16		FIRST ANGLE PROJECTION		SCALE	1/25
DRAWN	CHECKED	APPROVED	REF. DWG. NO.	REV. NO.	
Miao Wang	Iris Ji	San			
		DWG. NO.		ZGS1500-230727-01	

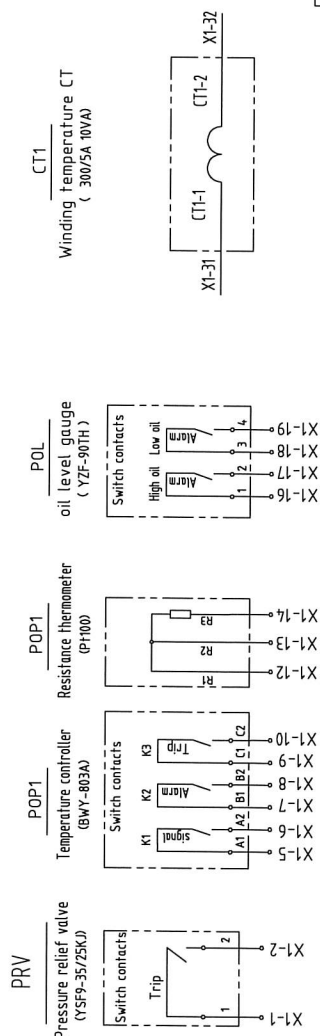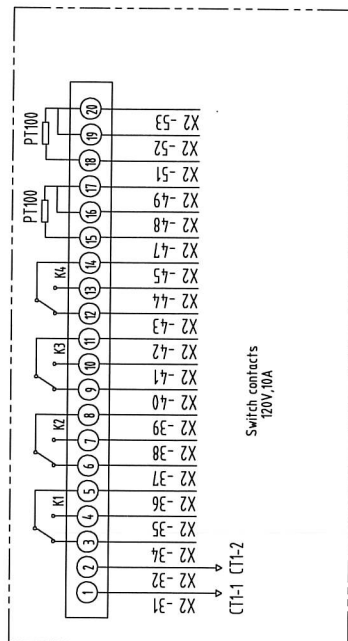

DWG. NAME	Transformer Secondary Diagram
TYPE	ZGS-Z-1500/24.94/4.16

REV. NO.	 JIEZOU POWER	
1	APPROVED	Mike W Iris J Ella W Sam
	DRAWN CHECKED CHECKED APPROVED	FIRST ANGLE PROJECTION SCALE

NOTE:

- 1.ALL DIMENSIONS ARE IN MILLIMETERS
- 2.MATERIAL:STAINLESS STEEL
- 3.THICKNESS :1mm
- 4.LETTER COLOR: BLACK




3 ϕ PAD MOUNT
 Δ /Y TRANSFORMER




kVA: 1500
HV: 24940V
HV BIL kV: 150
TYPE II
5.75 % IMP.:@85°C

LV: 4160/2402V
LV BIL kV: 60
CORE & COIL WEIGHT:1800kg
TANK & FIT WEIGHT:1540kg
FLUID:mineral oil
LITERS:1415L,1260kg
TOTAL WEIGHT:4600kg

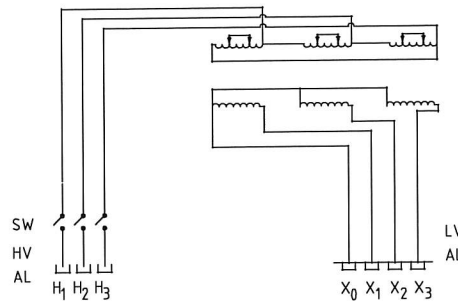

CONTAINS NO DETECTABLE LEVEL OF PCB
(LESS THAN 1 PPM) AT TIME OF MANUFACTURE.

	VOLTS	POS.	AMPS
	26187	1	33.07
	25564	2	33.88
CONT 65°C RISE ONAN 60HZ	24940	3	34.72
	24317	4	35.62
	23693	5	36.55



LIQUID FILLED/LIQUID IMMERSED
DISTRIBUTION TRANSFORMER

MAX. AMPS @ 1500kVA
%IZ@ BASE kVA AND RATED VOLTAGE
CSA C802.1-13 EFFICIENCY COMPLIANT
READ INSTRUCTIONS BEFORE OPERATING.

BUILT TO C227.4



SER. NO.:

DATE OF MANUFACTURE:



1piece/set

CHANGE

TYPE
ZGS-1500/24.94

DWG. NAME
Name plate

FIRST ANGLE
PROJECTION

SCALE

1
5


DRAWN	CHECKED	CHECKED		APPROVED
Mike W	Iris J	Ella W		Sam



JIEZOU POWER


REV.
NO.



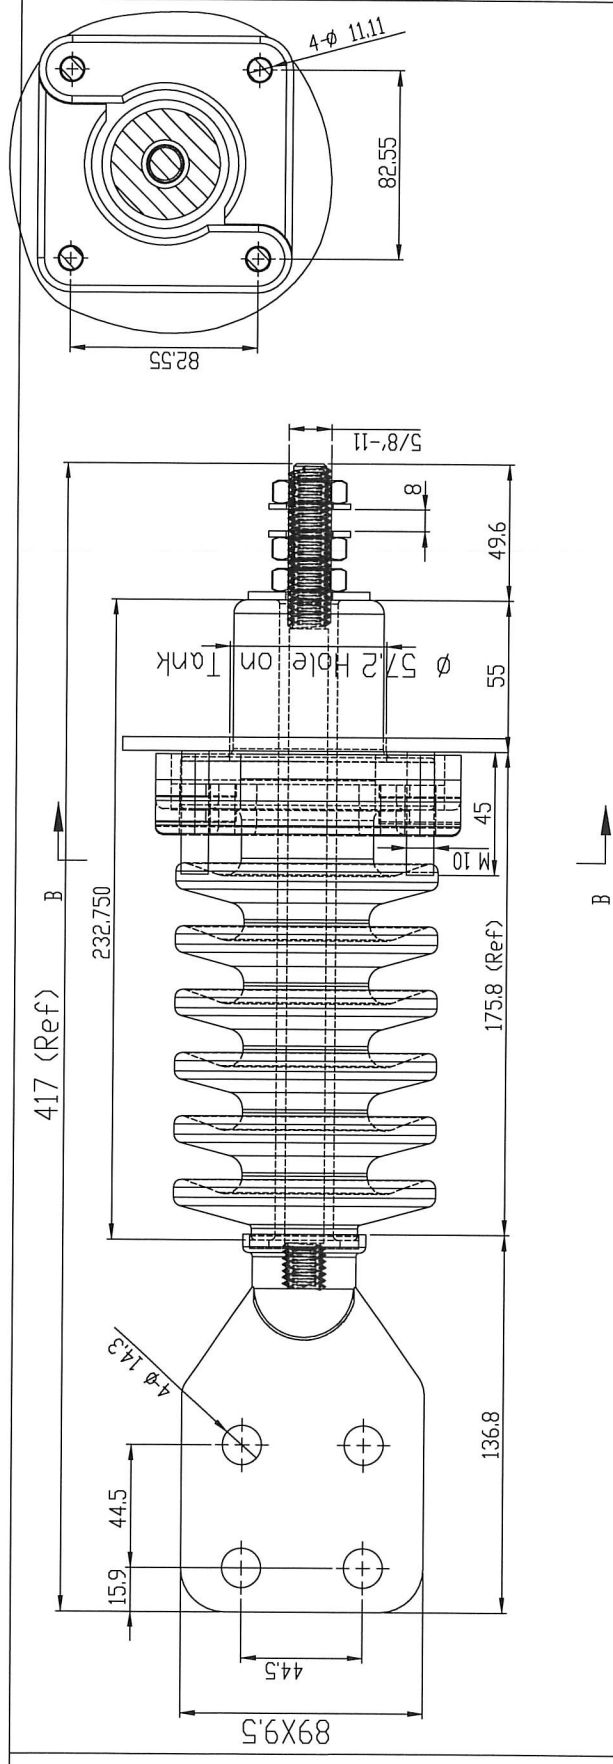


Porcelain sleeve exposed copper parts tinned, thickness >5 um

ITEM	DESCRIPTION	QTY	MATERIAL
1	Porcelain Bushing GNY 7988	1	Porcelain
2	Plain gasket 40X16X3	1	NBR
3	5871-417A-01 4HOLE Terminal	1	Brass Forging
4	Copper Stem 15kV 417A	1	Copper
5	Flange gasket 92.5X57.2X4	1	NBR
6	Transformer Tank (15kV 417A)	1	Not in scope of supply
7	Washer ø44.5Xø17X3	1	Stainless steel ANSI 304
8	Brass nut 0.625'-11	3	Brass
9	Brass washer ø30Xø17X2	2	Brass
10	Externally clamped Flange 82.55X82.55	4	Aluminum alloy



Rated Voltage =15 kV
 Rated Current =417 A
 Creep Distance >=330 mm
 Impulse Level =95 kV
 wet withstand Voltage = kV
 Tank Hole Diameter = ø 57.2 mm
 Porcelain Color =gray

ANSI HV Bushing 4-Hole spade type					
15kV /417A BIL 95kV					
Transformer Bushing					
Weight	Scale	DWG NO			
11	1:1	GNI422-007 UE			
Design	JULY LI	Check			
Approve		Craft			
		Date	2021.10.21		

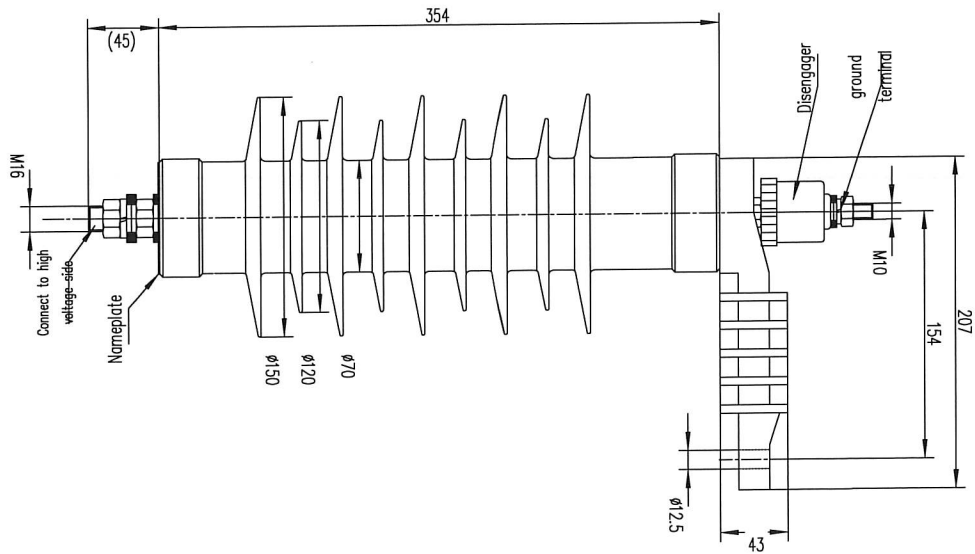

H5ZW-39/98 (400A) metal oxide arrester technical parameters

NO	ITEM	SPC
1	System nominal voltage kV	24.94
2	Surge arrester rated voltage kV (effective value)	39
3	Continuous operating voltage kV (effective value)	31.2
4	DC 1mA reference voltage kV	56
5	2ms square wave current A (Peak value)	400
6	Steep wave impact residual pressure ≤kV (Peak value)	113
7	Lightning impulse residual voltage ≤kV (peak value)	98
8	Operating shock residual pressure ≤kV (peak value)	83
9	Nominal discharge current kA	5

姓名	姓名	姓名
DRIVING TITLE	NAME	SIGNATURE
金属氧化物避雷器	金属氧化物避雷器	金属氧化物避雷器
Metal Oxide Surge Arrester		
材料	材料	材料
PROJECT	PROJECT	(18)05-01
026	DRAWING	026
3	VERSION	3
DISCIPLINE	DISCIPLINE	
SCALE	SCALE	
DATE	DATE	

Parts List				
Item	Description	Material	QTY	Note
1	Pipe Plug	Hpb57-3	1PCS	1" NPT
2	O-Ring	Viton	1PCS	
3	Sampling Device	Hpb57-3	1PCS	3/8"
4	Cap	Hpb57-3	1PCS	
5	Valve Body	Hpb57-3	1PCS	
6	Gasket	EPDM	1PCS	Ø58.5*44*6mm
Technical Data				
Maximum Pressure				
300LBS(Water-Oil-Gas)				

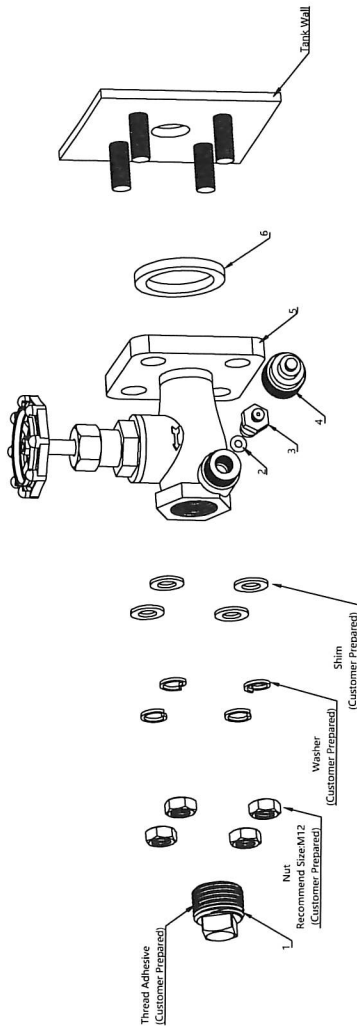


Fig 1: Installation Diagram

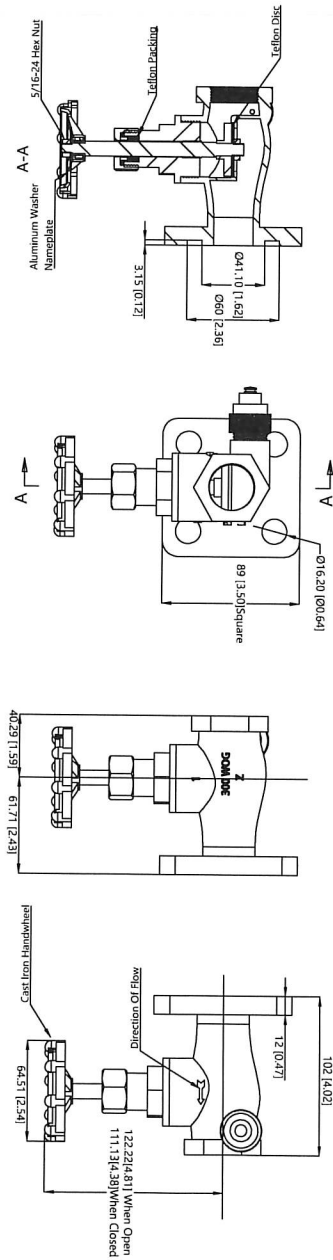


Fig 2: Body

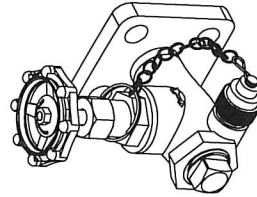


Fig 3: Pipe Plug

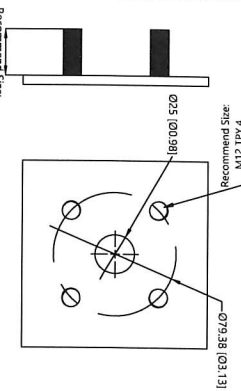


Fig 4: Mounting Hole & Welding Bolt

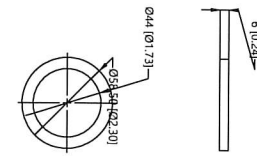


Fig 4: Gasket




Fig 5: 3D View

1" Straight Flange Globe Valve With Side Sampler-(SID-YF1-1/1019)

Scale 1:1	1:1	Unit of Length	mm[inch]
Version A	A	Drawing No	SF057AA00
Designed			
Checked			
Approved			

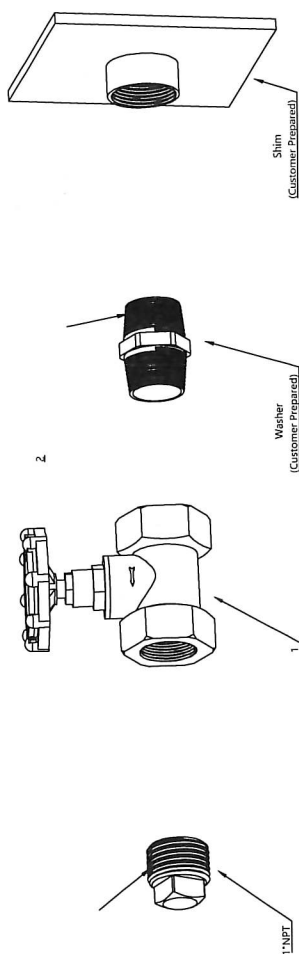


Fig 1: Installation Diagram

Parts List				
Item	Description	Material	QTY	Note
1	Pipe Plug	Hpb57-3	1PCS	1" NPT
2	1" Globe Valve	Hpb57-3	1PCS	1" NPT
3	Adapter	Hpb57-3	1PCS	1" NPT
Technical Data				
Maximum Pressure		200LBS(Water-Oil-Gas)		
Installation Torque		61N*m-74.5N*m		

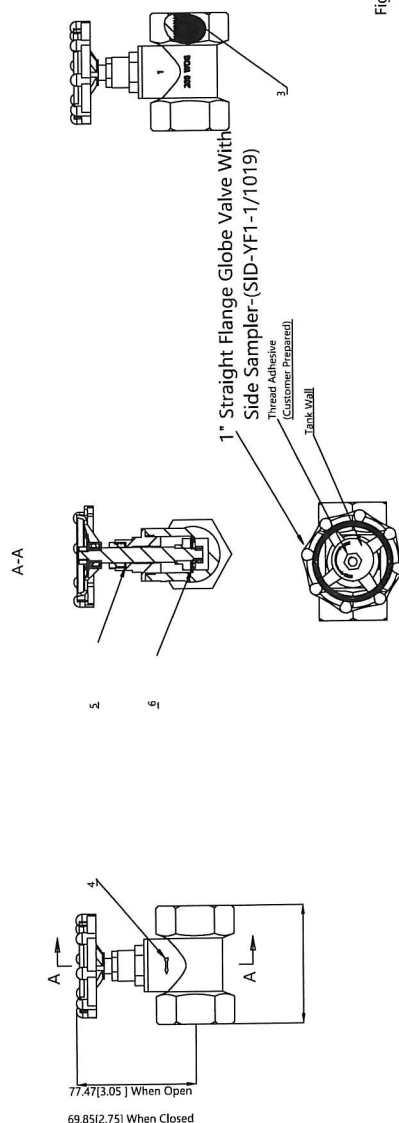


Fig 2: Body

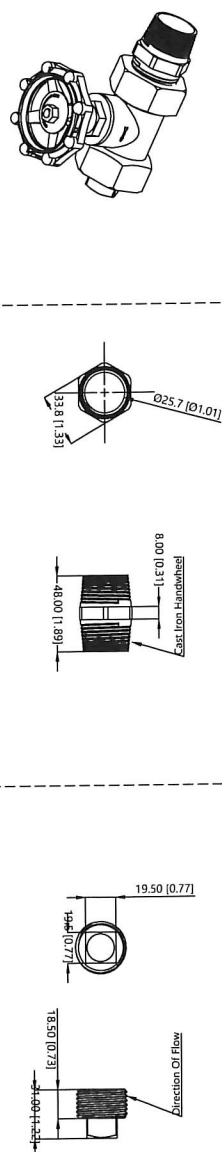


Fig 3: Pipe Plug

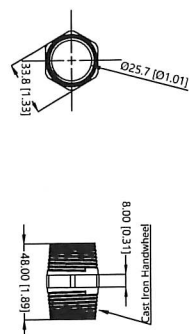


Fig 4: Adapter




Fig 5: 3D View

1" Globe Valve With Pipe Plug & Nipple-(SID-YF1-1/1004)				
Scale 1:1	1:1	Unit of Length	mm[inch]	
Version A	A	Drawing No	SF056AA00	
Designed				
Checked				
Approved				