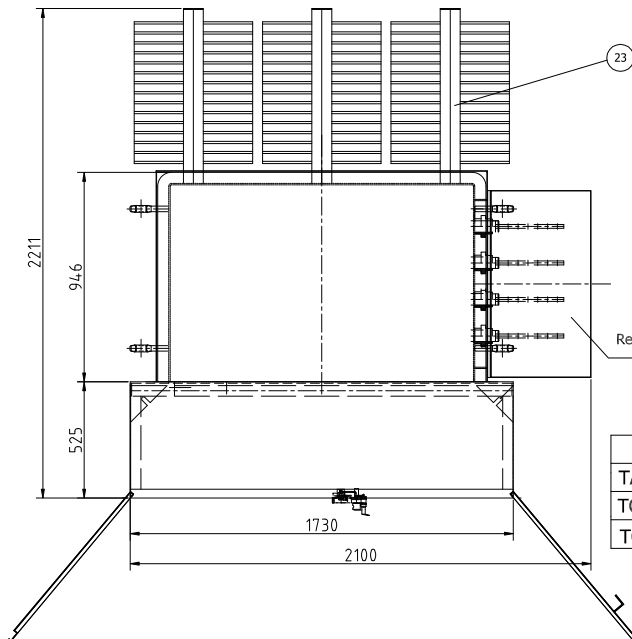
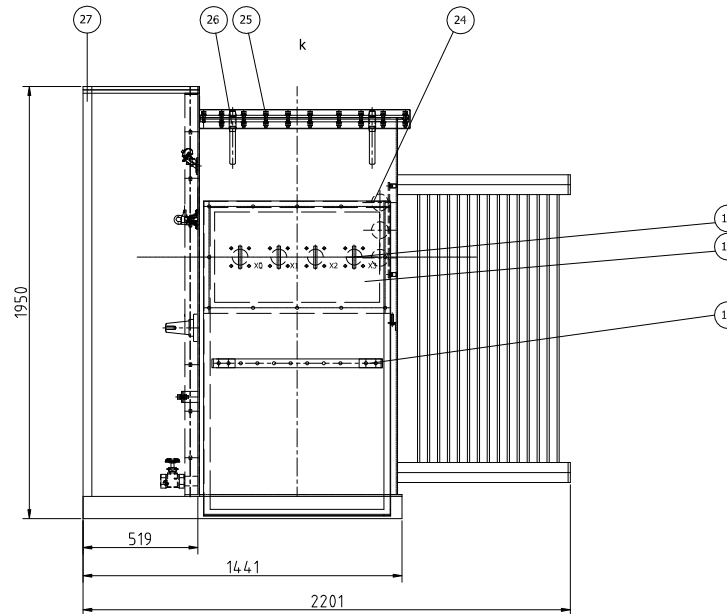
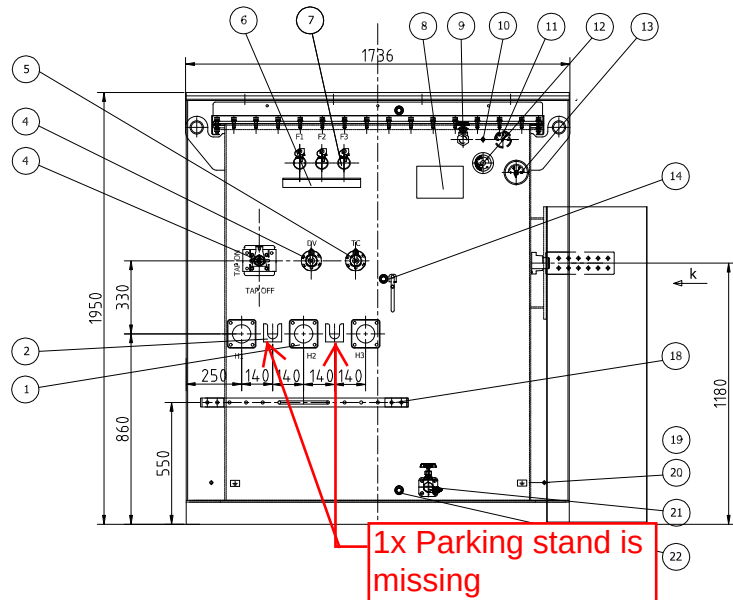




APPROUVÉ

Approved under integration
of comments.

Signature numérique de
Joël Grondines
DN : cn=Joël Grondines,
o=SGE, ou=Estimation &
Achats,
email=jgrondines@groupe
sge.ca, c=CA
Date : 2023.11.09 15:00:33
-05'00'

Remove the protective cover during transportation

L.V. TERMINAL

GROUND PAD
STAINLESS STEEL

ITEM	WEIGHT
TANK & ACCESSORIES	1910Kg
TOTAL OIL WEIGHT	1980L
TOTAL WEIGHT	6370Kg

TECHNICAL DATA

RATING	2500kVA
PRIMARY VOLTAGE(V)	13800-6900DELTA
SECONDARY VOLTAGE(V)	2400WYE/1386
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
CONDUCTOR	COPPER
INSULATING OIL	FR3
TEMPERATURE RISE	65°C
EFFICIENCY	99,48%
LOAD LOSS AT RATED VOLTAGE	20000W
NO LOAD LOSSES	2000W
IMPEDANCE	5,75%
ALTITUDE	≤1000m
No. OF TAP POSITION	5
COLOR	ANSI 61 GRAY
CORE FORM	Three-phase Three-column

PARTS LIST

ITEM	DESCRIPTION	QTY
1	HV BUSHING (28kV,600A)	3
2	PARKING STAND BRACKET	3
3	DOUBLE VOLTAGE SWITCH	1
4	TWO POSITION LOADBREAKER SWITCH	1
5	TAP CHANGER 3PH (WSLII3125/15-2-6x5)	1
6	DRIP TRAY	1
7	BAYONET FUSE	3
8	NAMEPLATE	1
9	1" UPPER FILL VALVE	1
10	PRESSURE RELIEF VALVE	1
11	VACUUM PRESSURE GAUGE	1
12	OIL LEVEL GAUGE	1
13	OIL TEMPERATURE GAUGE WITH CONTACTS	1
14	DOOR HANDLE	1
15	LV BUSHING(3KV 12 HOLE,4000A)	4
16	750-4000 PADMOUNT LV PLATE, 304L S.S. 3/16in	1
17	GROUND BUS	1
18	GROUND BUS	1
19	JACK	4
20	GROUND STEEL PADS	2
21	1"DRAIN VALVE WITH 3/8" SAMPLER	1
22	FIXED PROJECTING CUP	3
23	RADIATOR PJ-1400-15/520	3
24	ELSP FUSE	3
25	FLIP TOP COVER	1
26	LIFTING LUG	4
27	HINGED DOOR	2

TYPE
ZGS-Z-2500/13.8-6.9/2.4

DWG. NAME

General Assembly Drawing

DRAWN	CHECKED	CHECKED	APPROVED
Mike W	Ella W	Iris J	Sam S

FIRST ANGLE
PROJECTION

SCALE

1

ZGS-3000-231102-02

JZP
SINCE 1989 FROM USAREV.
NO.




APPROUVÉ

3 PHASE DISTRIBUTION
PAD MOUNTED TRANSFORMER

STANDARDS CSA C227.4, CSA C802.1
2500kVA HV 13800x6900V DELTA
LV 2400/1386V WYE
TYPE OF COILING KNAN
PERCENT IMPEDANCE: 5.75 %
TYPE OF OIL FR3 NO PCB
CORE & COLL (UNTAKING): LBS
TANK & FITTINGS: LBS


LIQUID: GALS LBS
TOTAL: LBS



VECTOR GRAPH (Dyn1)

PRODUCT NO. :
TYPE ZGS-2500/13.8x6.9/2.4
CONDUCTOR MATERIAL: COPPER
PHASE 3
FREQUENCY 60Hz
TEMPERATURE RISE 65° C/ 65° C
SERIAL NO. :
DATE OF MFG. :
H. V. Um/BIL/AC 15/95/34 kV
L. V. Um/BIL/AC 2.4/30/10 kV

Tapping Range	H.V		L.V			
	Voltage (V)	Current (A)	Voltage (V)	Current (A)		
A-C	A-D/B-C	A-C	A-D/B-C			
1 2-3	14490	7245	99.61	199.22	2400	601.41
2 3-4	14145	7072	102.04	204.08		
3 4-5	13800	6900	104.59	209.18		
4 5-6	13455	6727	107.27	214.55		
5 6-7	13110	6554	110.1	220.19		

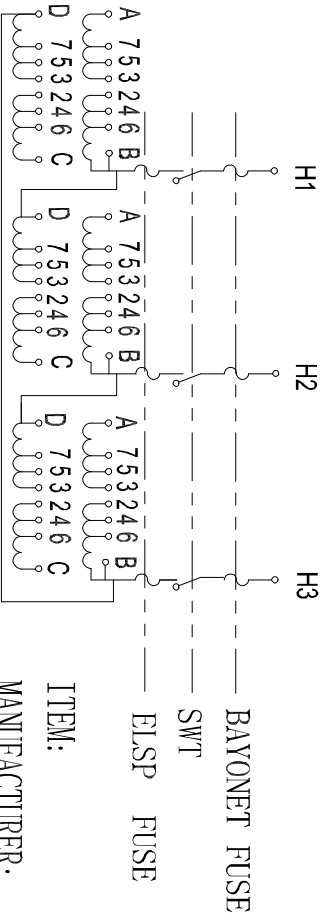

ITEM:
MANUFACTURER:
PART NUMBER:

Signature numérique de
Joël GONDRIES
DN : cn=Joël GONDRIES,
o=SGE ou=Estimation &
Achats
email=joelgondries@sgre.ca,
c=CA
Date : 2023.11.09 15:01:11
-0500

WWW.JIEZOUPOWER.COM