

APPROUVÉ

Approved under integration




of comment

TECHNICAL DATA



RATING	3000kVA
PRIMARY VOLTAGE(V)	13800-6900DELTA
SECONDARY VOLTAGE(V)	600WYE/347
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
CONDUCTOR	COPPER
INSULATING OIL	FR3
TEMPERATURE RISE	65°C
EFFICIENCY	99.48%
LOAD LOSS AT RATED VOLTAGE	22000W
NO LOAD LOSSES	2600W
IMPEDANCE	5.75%
ALTITUDE	≤1000m
No. OF TAP POSITION	5
COLOR	ANSI 61 GRAY
CORE FORM	Three-phase Three-column

PARTS LIST

ITEM	DESCRIPTION	QTY
1	HV BUSHING (28KV,600A)	3
2	PARKING STAND BRACKET	3
3	DOUBLE VOLTAGE SWITCH	1
4	TWO POSITION LOADBREAKER SWITCH	1
5	TAP CHANGER 3PH (WSLII3125/15-2-6×5)	1
6	DRIP TRAY	1
7	BAYONET FUSE	3
8	NAMEPLATE	1
9	1" UPPER FILL VALVE	1
10	PRESSURE RELIEF VALVE	1
11	VACUUM PRESSURE GAUGE	1
12	OIL LEVEL GAUGE	1
13	OIL TEMPERATURE GAUGE WITH CONTACTS	1
14	DOOR HANDLE	1
15	LV BUSHING(1.2KV 12 HOLE,4000A)	4
16	750-4000 PADMOUNT LV PLATE, 304L S.S. 3/16in	1
17	GROUND BUS	1
18	GROUND BUS	1
19	JACK	4
20	GROUND STEEL PADS	2
21	1"DRAIN VALVE WITH 3/8" SAMPLER	1
22	FIXED PROJECTING CUP	3
23	RADIATOR PJ-1400-15/520	3
24	ELSP FUSE	3
25	FLIP TOP COVER	1
26	LIFTING LUG	4
27	HINGED DOOR	2

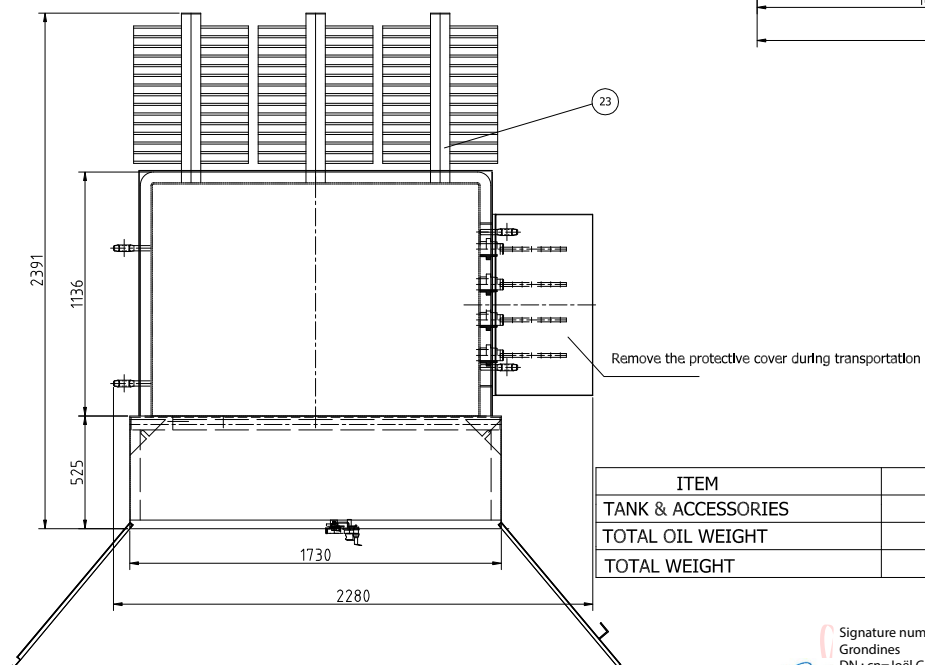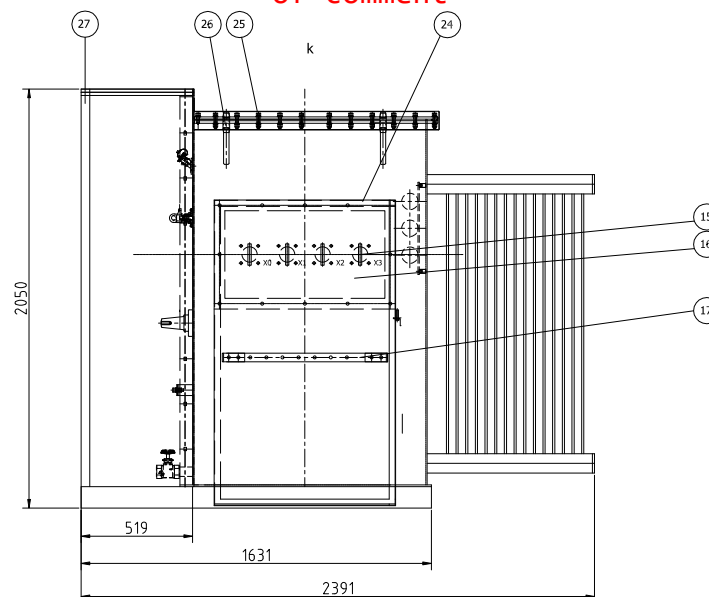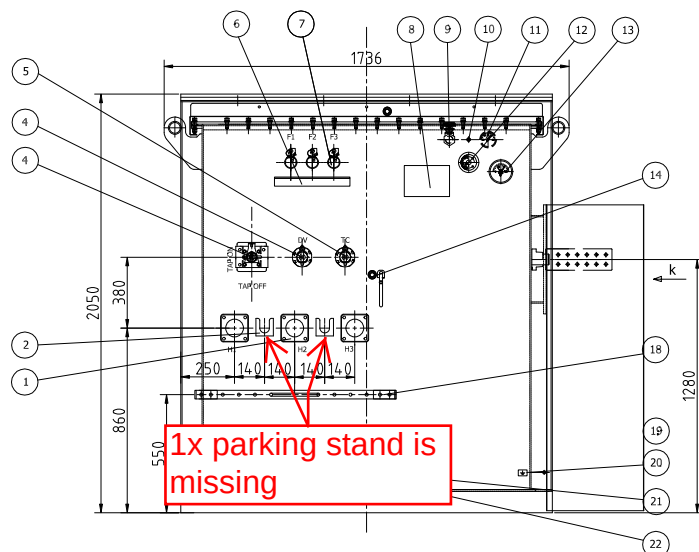

L.V. TERMINAL

GROUND PAD
STAINLESS STEEL

ITEM	WEIGHT
TANK & ACCESSORIES	2210Kg
TOTAL OIL WEIGHT	2280L
TOTAL WEIGHT	7150Kg

Signature numérique de Joël Grondines
DN : cn=Joël Grondines,
o=SGE, ou=Estimation &
Achats,
email=jgrondines@groupepsg
e.ca, c=CA
Date : 2023.11.09 14:59:15
-05'00'

TYPE
ZGS-Z-3000/13.8-6.9/0.6

DRAWN	CHECKED	CHECKED	APPROVED
Mike W	Ella W	Iris J	Sam S

ZGS-3000-231102-01

DWG. NAME

General Assembly Drawing

FIRST ANGLE PROJECTION	SCALE	1
------------------------	-------	---

JZP
SINCE 1989 FROM USAREV.
NO.

APPROUVÉ



Signature numérique de Joël
Grondines
DN : cn=Joël Grondines, o=SGE,
ou=Estimation & Achats,
email=jgrondines@groupeage.ca,
c=CA
Date : 2023.11.09 14:58:56 -05'00'

3 PHASE DISTRIBUTION

PAD MOUNTED TRANSFORMER



PRODUCT NO. :

TYPE ZGS-3000/13. 8x6. 9/0. 6

CONDUCTOR MATERIAL: COPPER

PHASE 3

FREQUENCY 60Hz

TEMPERATURE RISE 65° C/ 65° C

SERIAL NO. :

DATE OF MFG. :

H. V. Um/BIL/AC 15/95/34 kV

L. V. Um/BIL/AC 0.6/30/10 kV

STANDARDS CSA C227.4, CSA C802.1

3000kVA HV 13800x6900V DELTA

LV 600/347V WYE

TYPE OF COILING KMAN

PERCENT IMPEDANCE: 5.75 %


TYPE OF OIL FR3 NO PCB

CORE & COLL (UNTAKING): LBS

TANK & FITTINGS: LBS

LIQUID: GALS LBS

TOTAL: LBS

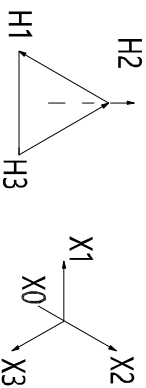

VECTOR GRAPH (Dyn1)

Tapping Range	H. V		L. V	
	Voltage (V)		Voltage Current (V) (A)	
1 2-3	14490	7245	119.53	239.07
2 3-4	14145	7072	122.45	244.9
3 4-5	13800	6900	125.51	251.02
4 5-6	13455	6727	128.73	257.46
5 6-7	13110	6554	132.12	264.23

H1

H2

H3

BAYONET FUSE


SWT

ELSP FUSE

ITEM:

MANUFACTURER:

PART NUMBER:



WWW.JIEZOUPOER.COM