
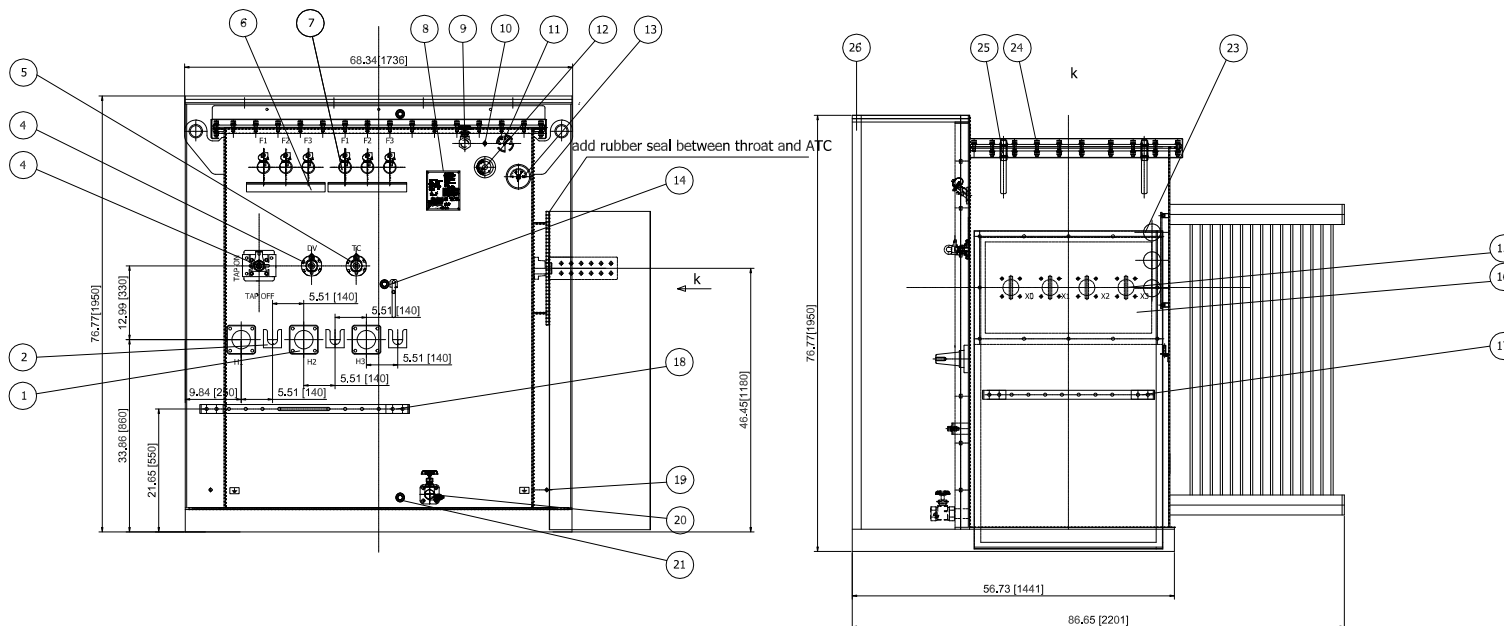
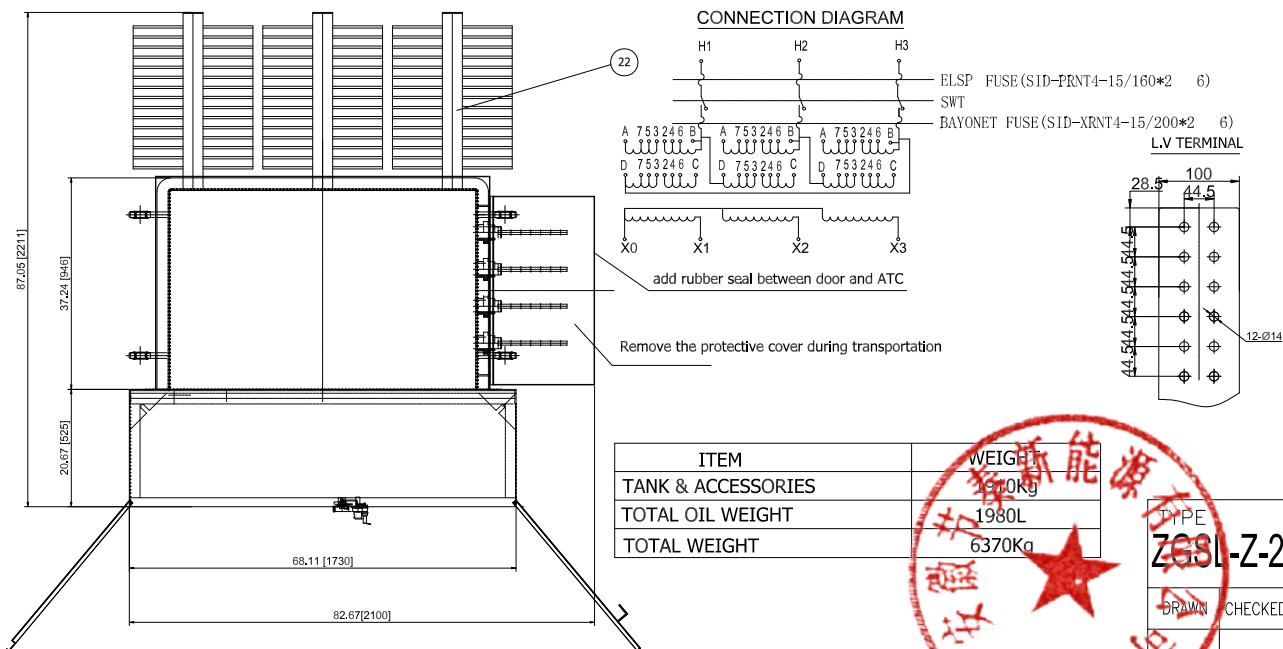




CONNECTION DIAGRAM

GROUND PAD
STAINLESS STEEL

ITEM	WEIGHT
TANK & ACCESSORIES	590Kg
TOTAL OIL WEIGHT	1980L
TOTAL WEIGHT	6370Kg

ZGS-Z-2500/13.8-6.9/2.4

TYPE	
DRAWN	CHECKED
IRIS J	ELLA W
SAM S	

ZGS2500-231102-01

TECHNICAL DATA

RATING	2500kVA
PRIMARY VOLTAGE(V)	13800-6900DELTA
SECONDARY VOLTAGE(V)	2400WYE/1386
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
CONDUCTOR	COPPER
INSULATING OIL	FR3
TEMPERATURE RISE	65°C
EFFICIENCY	99.48%
LOAD LOSS AT RATED VOLTAGE	20000W
NO LOAD LOSSES	2000
IMPEDANCE	5.75%
ALTITUDE	≤1000m
No. OF TAP POSITION	5
COLOR	ANSI 61 GRAY
CORE FORM	Three-phase Three-column

PARTS LIST

ITEM	DESCRIPTION	QTY
1	HV BUSHING (15KV,600A)	3
2	PARKING STAND BRACKET	3
3	DOUBLE VOLTAGE SWITCH	1
4	TWO POSITION LOADBREAKER SWITCH	1
5	TAP CHANGER 3PH (WSLII3125/15-2-6×5)	1
6	DRIP TRAY	2
7	BAYONET FUSE(SID-PRNT4-15/160*2)	6
8	NAMEPLATE	1
9	1" UPPER FILL VALVE	1
10	PRESSURE RELIEF VALVE	1
11	VACUUM PRESSURE GAUGE	1
12	OIL LEVEL GAUGE	1
13	OIL TEMPERATURE GAUGE WITH CONTACTS	1
14	DOOR HANDLE	1
15	LV BUSHING(3KV 12 HOLE,4000A)	4
16	750-4000 PADMOUNT LV PLATE, 304L S.S. 3/16in	1
17	GROUND BUS	1
18	GROUND BUS	1
19	GROUND STEEL PADS	2
20	1"DRAIN VALVE WITH 3/8" SAMPLER	1
21	FIXED PROJECTING CUP	3
22	RADIATOR PJ-1400-15/520	3
23	ELSP FUSE(SID-XRNT4-15/200*2)	6
24	FLIP TOP COVER	1
25	LIFTING LUG	4
26	HINGED DOOR	2

DWG. NAME

General Assembly Drawing

FIRST ANGLE
PROJECTION

SCALE 1

JZP
SINCE 1989 FROM USAREV.
NO.




3 PHASE DISTRIBUTION
PAD MOUNTED TRANSFORMER

PRODUCT NO. :
TYPE ZGS-2500/13.8x6.9/2.4
CONDUCTOR MATERIAL: COPPER
PHASE 3
FREQUENCY 60Hz
TEMPERATURE RISE 65° C/ 65° C
SERIAL NO. :
DATE OF MFG. :
H. V. Um/BIL/AC 15/95/34 kV
L. V. Um/BIL/AC 2.4/30/10 kV

STANDARDS CSA C227.4
2500kVA HV 13800x6900V DELTA
LV 2400/1386V WYE

TYPE OF COILING KNAN
PERCENT IMPEDANCE: 5.75 %
TYPE OF OIL FR3 NO PCB
CORE & COLL (UN TAKING): LBS
TANK & FITTINGS: LBS
LIQUID: GALS LBS
TOTAL: LBS

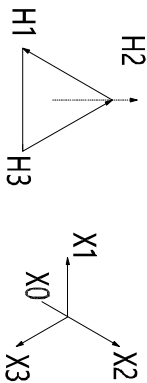


VECTOR GRAPH (Dyn1)

Tapping Range	H. V		L. V	
	Voltage (V)	Current (A)	Voltage (V)	Current (A)
1 2-3	14490	7245	99.61	199.22
2 3-4	14145	7072	102.04	204.08
3 4-5	13800	6900	104.59	209.18
4 5-6	13455	6727	107.27	214.55
5 6-7	13110	6554	110.1	220.19


H1 H2 H3

ELSP FUSE (SID-PRNT4-15/160*2 6)
SWT

BAYONET FUSE (SID-XRNT4-15/200*2 6)

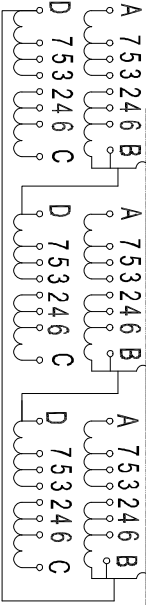

ITEM:
MANUFACTURER:
PART NUMBER:



WWW.JIEZOUPOWER.COM

