
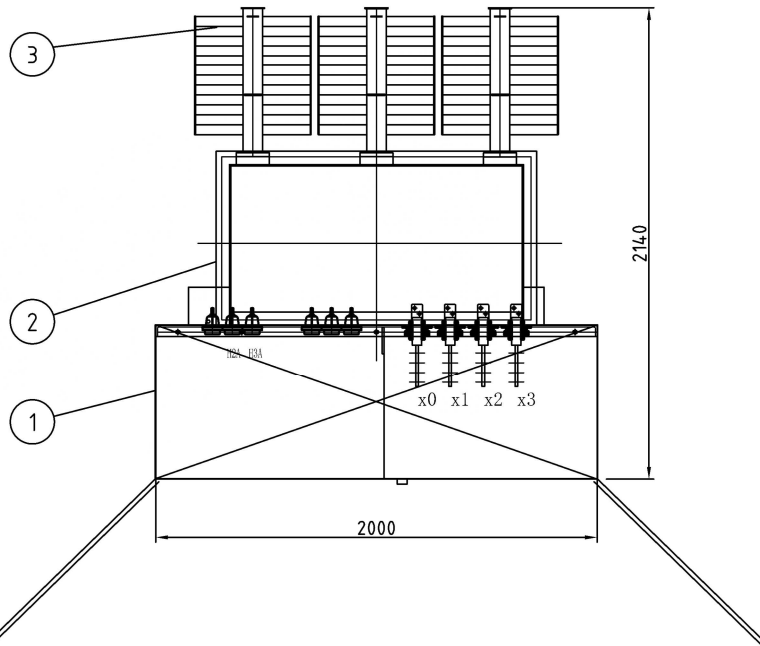



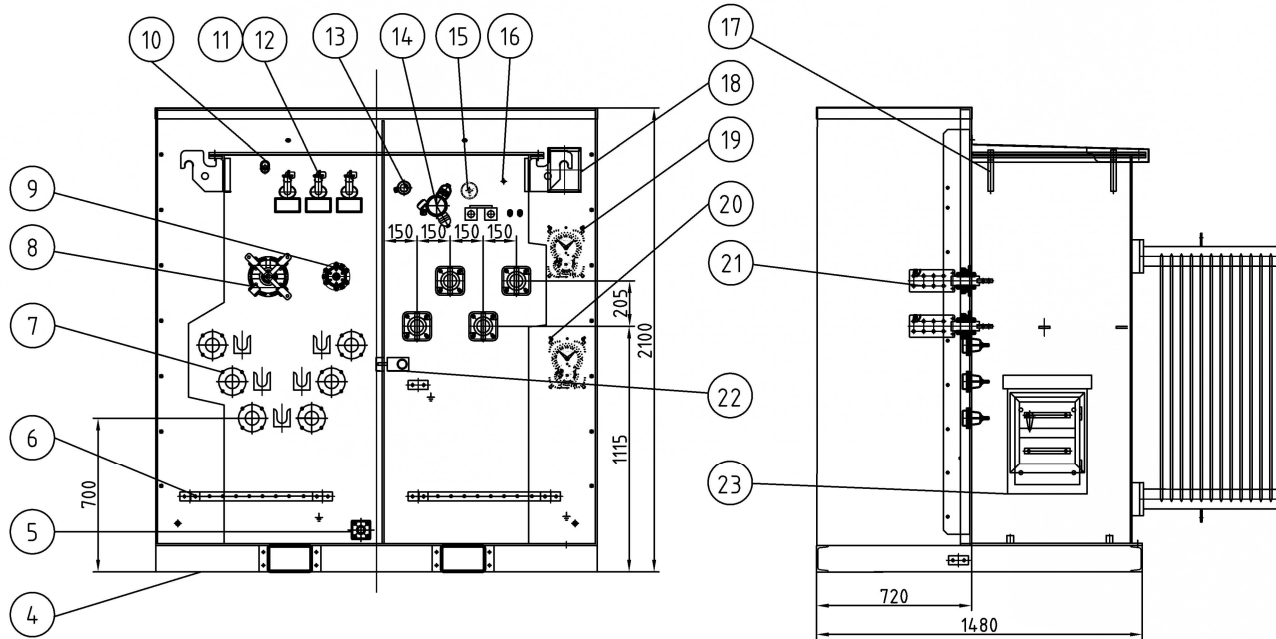

TECHNICAL DATA	
RATING	1000kVA
PRIMARY VOLTAGE	24940V
SECONDARY VOLTAGE	480Y/277V
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
WINDING MATERIAL	Aluminum
LOAD LOSS AT RATED VOLTAGE	11200W Tol +5%
NO LOAD LOSSES	1500W Tol +5%
IMPEDANCE	5.75% Tol±10%
ALTITUDE	≤1000m
No. OF TAPPOSITION	5,(±2×2.5%)
COLOR	Musell Green
CORE FORM	Three-phase three column
INSULATING OIL	<2PPM PCB
FLUID	MINERAL OIL

ITEM	WEIGHT(Kg)
Body weight	1350
Tank & accesories	1350
Total oil weight	1200
Total weight	3900

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	Front compartment	1
2	Tank and cover assembly	1
3	Radiators (PC1000-13/520)	3
4	Base	1
5	Oil drain valve	1
6	Ground Stainless steel	7
7	HV bushing (25kV 200A)	6
8	Load Switch	1
9	Tap changer	1
10	OIL FILL VALVE	1
11	High voltage backup current-limiting fuse	3
12	High voltage overload fuse	3
13	Pressure relief device (YZF-35/25KJ)	1
14	Oil-level indicator (YZF-90)	1
15	Vacuum manometer (YZ-70)	1
16	Vent valve	1
17	LIFTING LUGS	4
18	Name plate	1
19	OIL THERMOMETER (BWY-803A)	1
20	Winding thermometer	1
21	LV BUSHING (1.0KV 2000A)	4
22	Type DM Access Interlock	1
23	Terminal box	1

TYPE ZGS-Z-1000/24.94/0.48					DWG. NAME General Assembly Drawing				
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1/25		
					REF. DWG. NO.				REV. NO.
					DWG. NO.	1.710.3554.1			△