


R

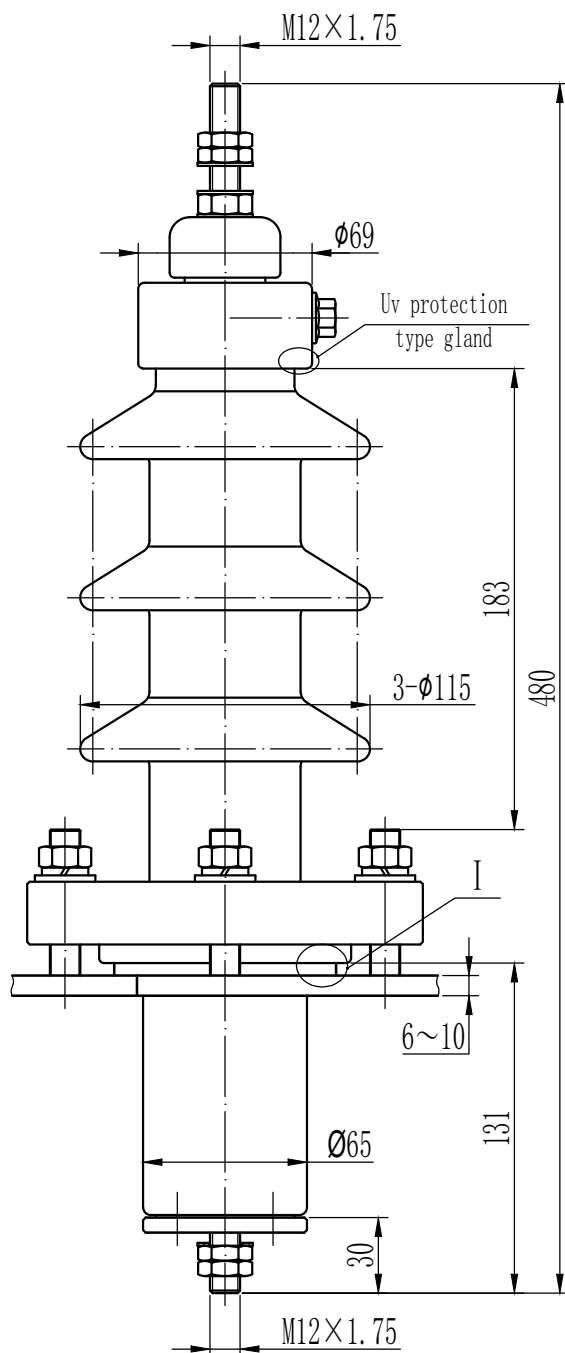

Technical condition

Rated voltage: 25kV;

Rated current: 315A;

Power frequency dry voltage: 61kV/1min;


Lightning impulse voltage: 125kV;

Cantilever withstand load: 1000N;

Creepage distance: $\geq 400\text{mm}$;

Support altitude: 1000m;

Other requirements comply with the latest version of GB/T 4109 and IEC 60137.

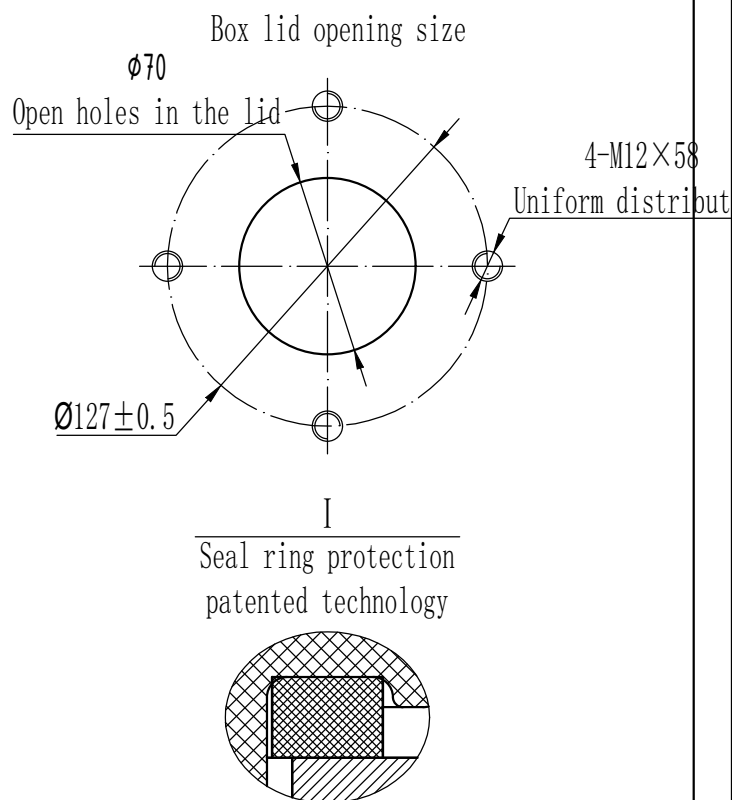A $\phi 88 \times \phi 66 \times 8$ rectangular sealing ring is included with the product.

						BD-25/315P			
						Through rod type casing			
						(Platen mounting)			
Marking	Number of places	Zoning	Change file number	Sign it	date	pattern marking	weight	proportion	
design			Standardization					1:3	
check									
Audit									
Craft			Permission granted			One in all	Slide 1		AM. CFA. 007. P