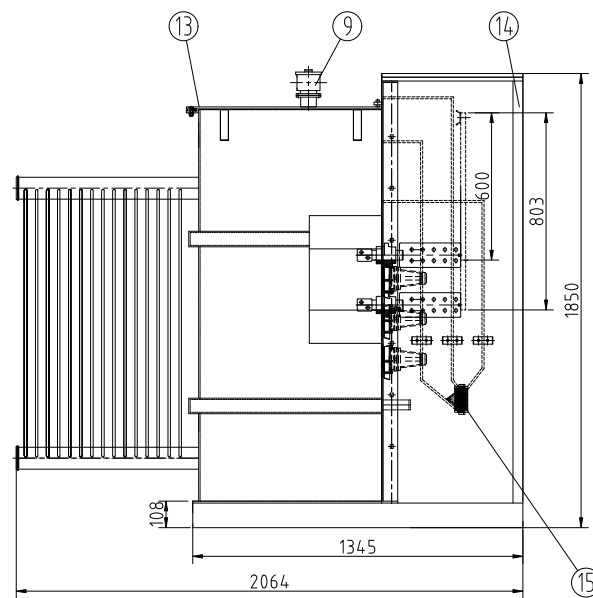
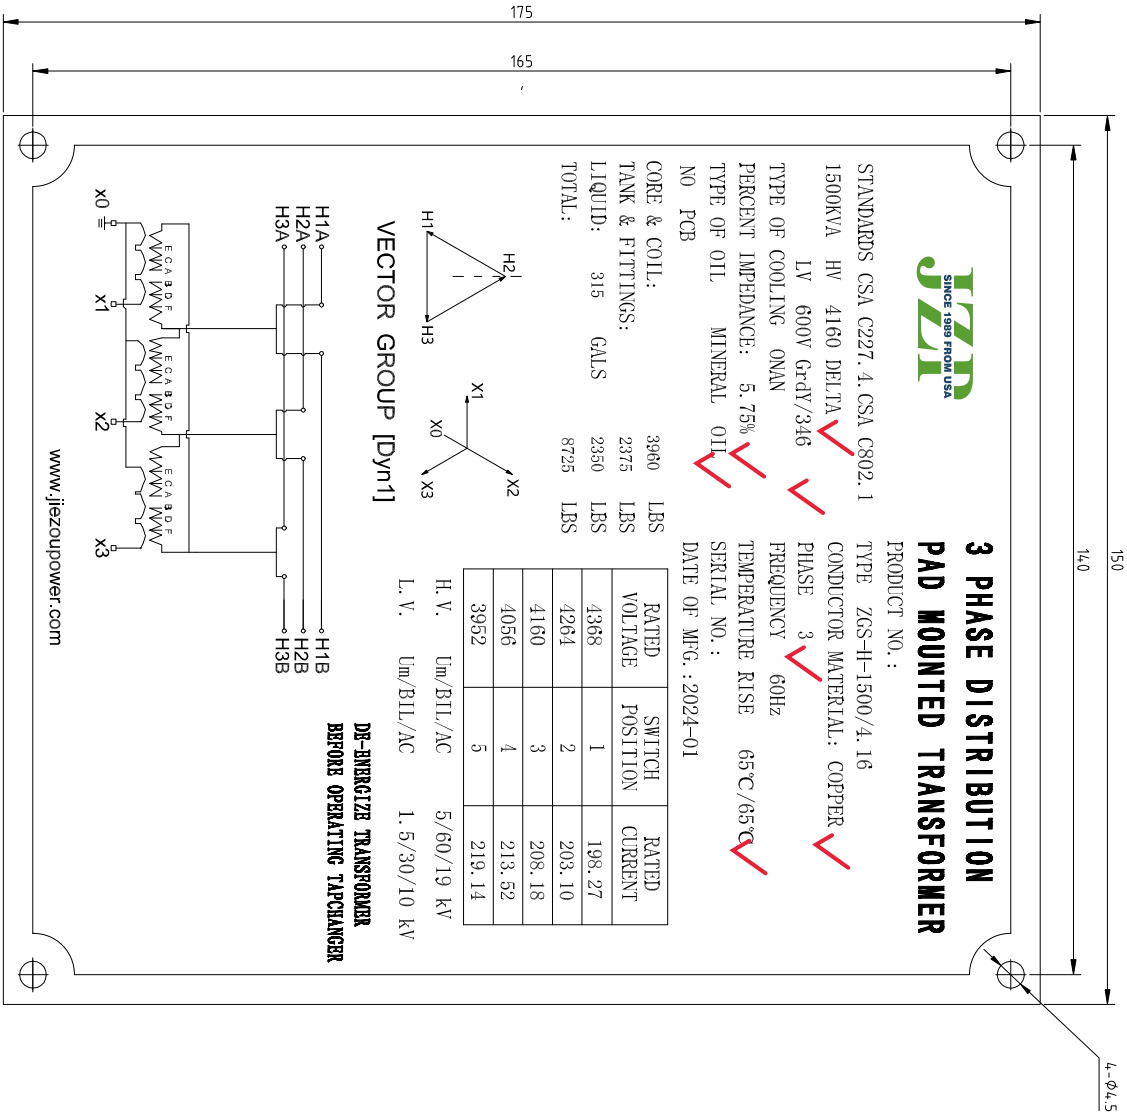


TECHNICAL DATA	
RATING	1500kVA ✓
PRIMARY VOLTAGE(V)	4160 DELTA
SECONDARY VOLTAGE(V)	600GrdY/346
FREQUENCY	60Hz ✓
VECTOR GROUP	Dyn1
CONDUCTOR	COPPER
PRIMARY BIL VOLTAGE	60kV ✓
SECONDARY BIL VOLTAGE	30kV ✓
INSULATING OIL	MINERAL OIL ✓
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	12500W
NO LOAD LOSSES	1200W
IMPEDANCE	5.75%
ALTITUDE	≤1000m
COLOR	MUBSELL NO.7.0 GY 3.2/1.5
CORE FORM	THREE-PHASE THREE-COLUMN

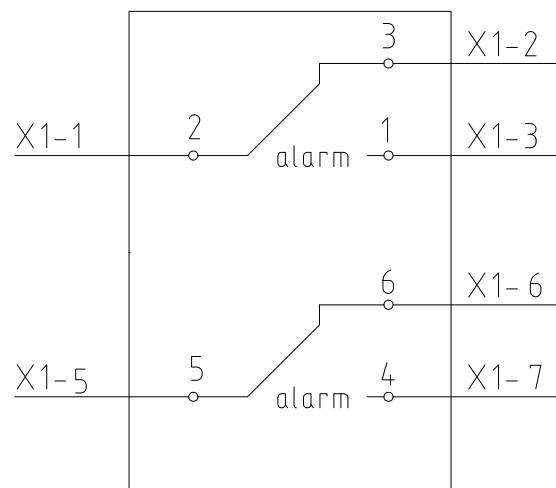
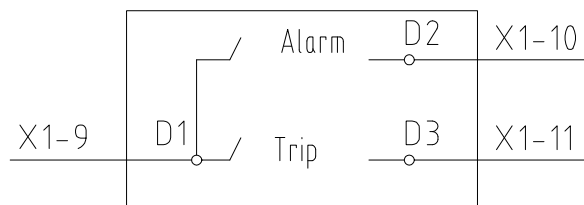
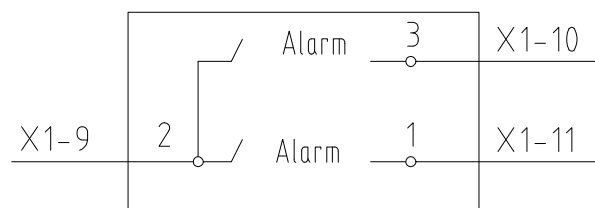
TYPE ZGS-H-1500/4.16/0.6					DWG. NAME General Assembly Drawing				
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1		
Mike	Jack	Iris		Sam	JZP SINCE 1989 FROM USA				REV. NO.
ZGS1500-240227-01									

NOTE:

- 1.ALL DIMENSIONS ARE IN MILLIMETERS
- 2.MATERIAL:STAINLESS STEEL
- 3.THICKNESS :1mm
- 4.LETTER COLOR: BLACK



CHANGE									
TYPE				DWG. NAME					
ZGS-H-1500/4.16/0.6				Name Plate					
FIRST ANGLE PROJECTION	SCALE	1 / 2		DRAWN	CHECKED	CHECKED		APPROVED	
		2024-02-27		Mike	Jack	Iris		Sam	
				REF. DWG. NO.					REV. NO.
				DWG. NO.	ZGS1500-240227-01				

PRESSURE RELIEF DEVICE
PRDOIL LEVEL INDICATOR
OLIOIL TEMPERATURE INDICATOR
OTI

X1:Terminal Block		
Label	NO.	Function
PRD-2	1	alarm
PRD-3	2	
PRD-1	3	
	4	
PRD-5	5	
PRD-6	6	
PRD-4	7	
	8	
OLI-D1	9	
OLI-D2	10	
OLI-D3	11	
OTI-2	9	
OTI-3	10	
OTI-1	11	
		Spare
	25	

Q'TY	NO	NAME	MATERIAL	DWG NO.	CODE	SIZE	U. WEIGHT	G. WEIGHT	REMARK
1	1	PRD	3×1.5mm ² ZR-KVVP ₂			5 m			
1	2	OLI	3×1.5mm ² ZR-KVVP ₂			3m			
1	3	OTI	3×1.5mm ² ZR-KVVP ₂			3m			

TYPE				DWG. NAME					
1500KVA,4.16/0.6kV				Secondary wiring diagram					
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1		
Mike	Jack	Iris		Sam	REF. DWG. NO.				REV. NO.
JZP SINCE 1999 FROM USA					DWG. NO.	ZGS1500-240227-01			1