

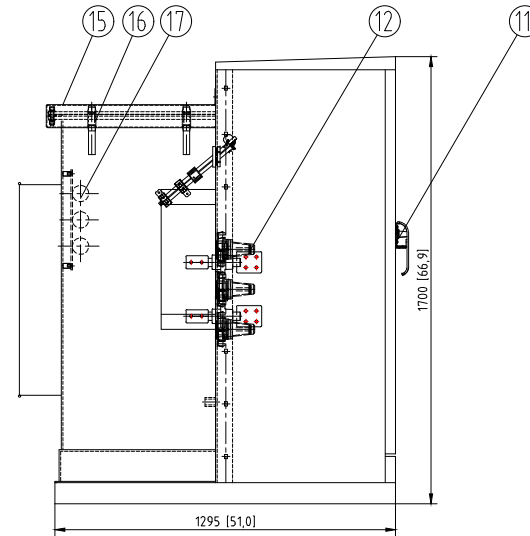


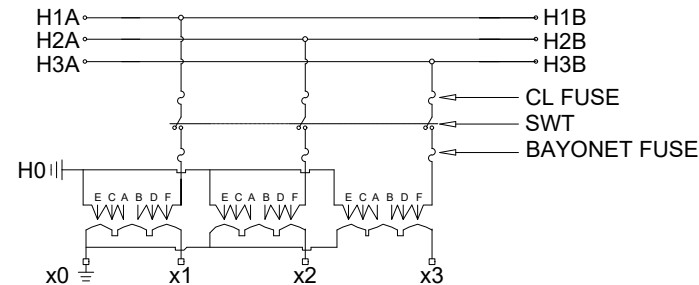


ITEM	WEIGHT(LBS)
CORE WEIGHT	915 LBS
TOTAL OIL WEIGHT	1065 LBS
TOTAL WEIGHT	3365 LBS

TECHNICAL DATA		
RATING		150kVA
PRIMARY VOLTAGE(V)		13200Grdy/7620
SECONDARY VOLTAGE(V)		480Grdy/277
FREQUENCY		60Hz
VECTOR GROUP		YNyn0
CONDUCTOR		COPPER/ALUMINUM
PRIMARY BIL VOLTAGE		95kV
SECONDARY BIL VOLTAGE		30kV
INSULATING OIL		MINERAL OIL
TEMPERATURE RISE		65°C
LOAD LOSS AT RATED VOLTAGE		2310 W
NO LOAD LOSSES		280 W
IMPEDANCE		3.5-4.5%
ALTITUDE		≤1000m
COLOR	MUNSELL	NO.7.0 GY 3.29/1.5
CORE FORM	THREE-PHASE FIVE-COLUMN	



GROUND PAD
STAINLESS STEEL



PARTS LIST		
ITEM	DESCRIPTION	QTY
1	HV BUSHING (15kV,200A)	6
2	PARKING STAND BRACKET	5
3	DRIP TRAY	3
4	BAYONET FUSE (4000353C08)	3
5	OIL LEVEL GAUGE(UHZ-01)	1
6	FILL PLUG	1
7	PRESSURE RELIEF VALVE	1
8	VACUUM PRESSURE GAUGE(Y100)	1
9	OIL TEMPERATURE GAUGE(WSS-401)	1
10	NAMEPLATE	1
11	DOOR HANDLE	1
12	LV BUSHING(FTG1-1/1000,4 HOLE,BIL:30kV)	4
13	GROUND STEEL PADS	3
14	1"DRAIN VALVE WITH 3/8" SAMPLER	1
15	FLIP TOP COVER	1
16	LIFTING LUG	4
17	ELSP FUSE (CBUC08050C100)	3
18	TAP CHANGER(WSLI13 63/20-6x5)	1
19	TWO POSITION LB SWITCH	1
20	GROUND STRAP COPPER	1

TYPE ZGSL-H-150/13.2/0.48					DWG. NAME General Assembly Drawing				
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1		
Mike	Jack	Iris		Sam	JZP SINCE 1989 FROM USA  JIEZOU POWER				
1AK.710.2317									
					REV. NO. 0				

1. 把压力释放阀改为IFD（修改并更新图纸）
2. H0和X0在油箱内部连接，并由X0引出，后加的这个接地铜排（Item 20）是H0和X0唯一的接地点