

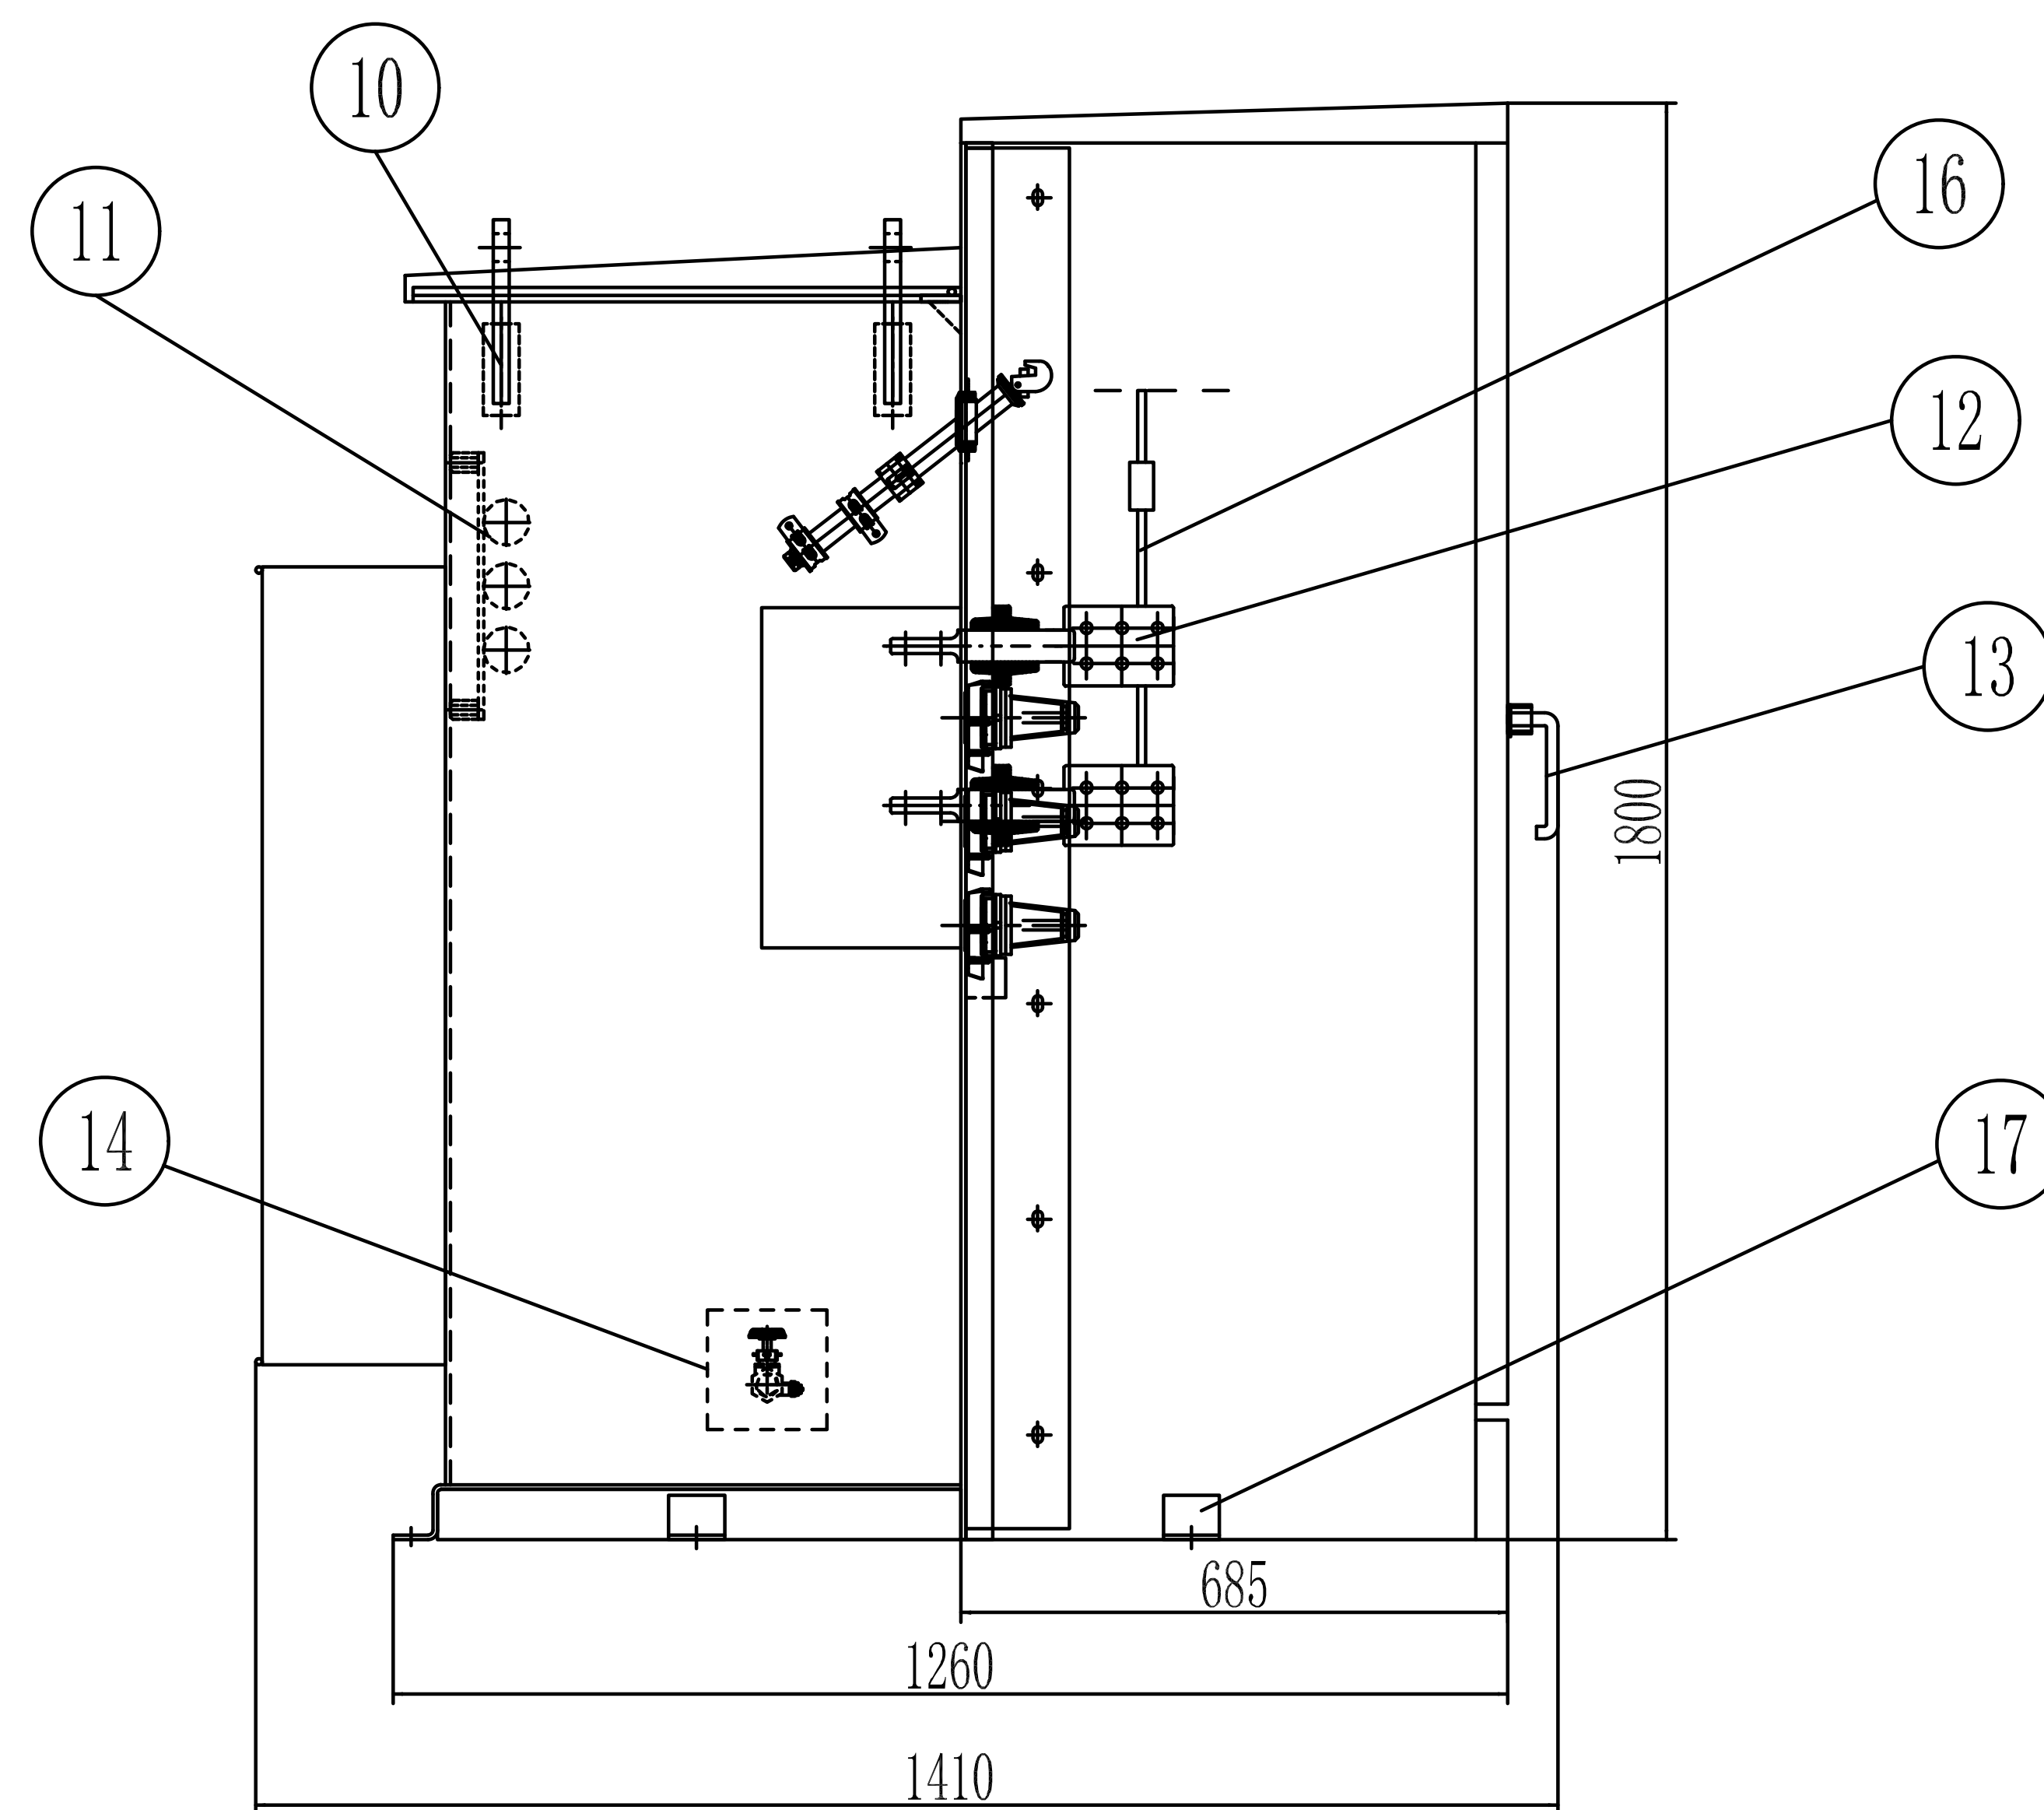



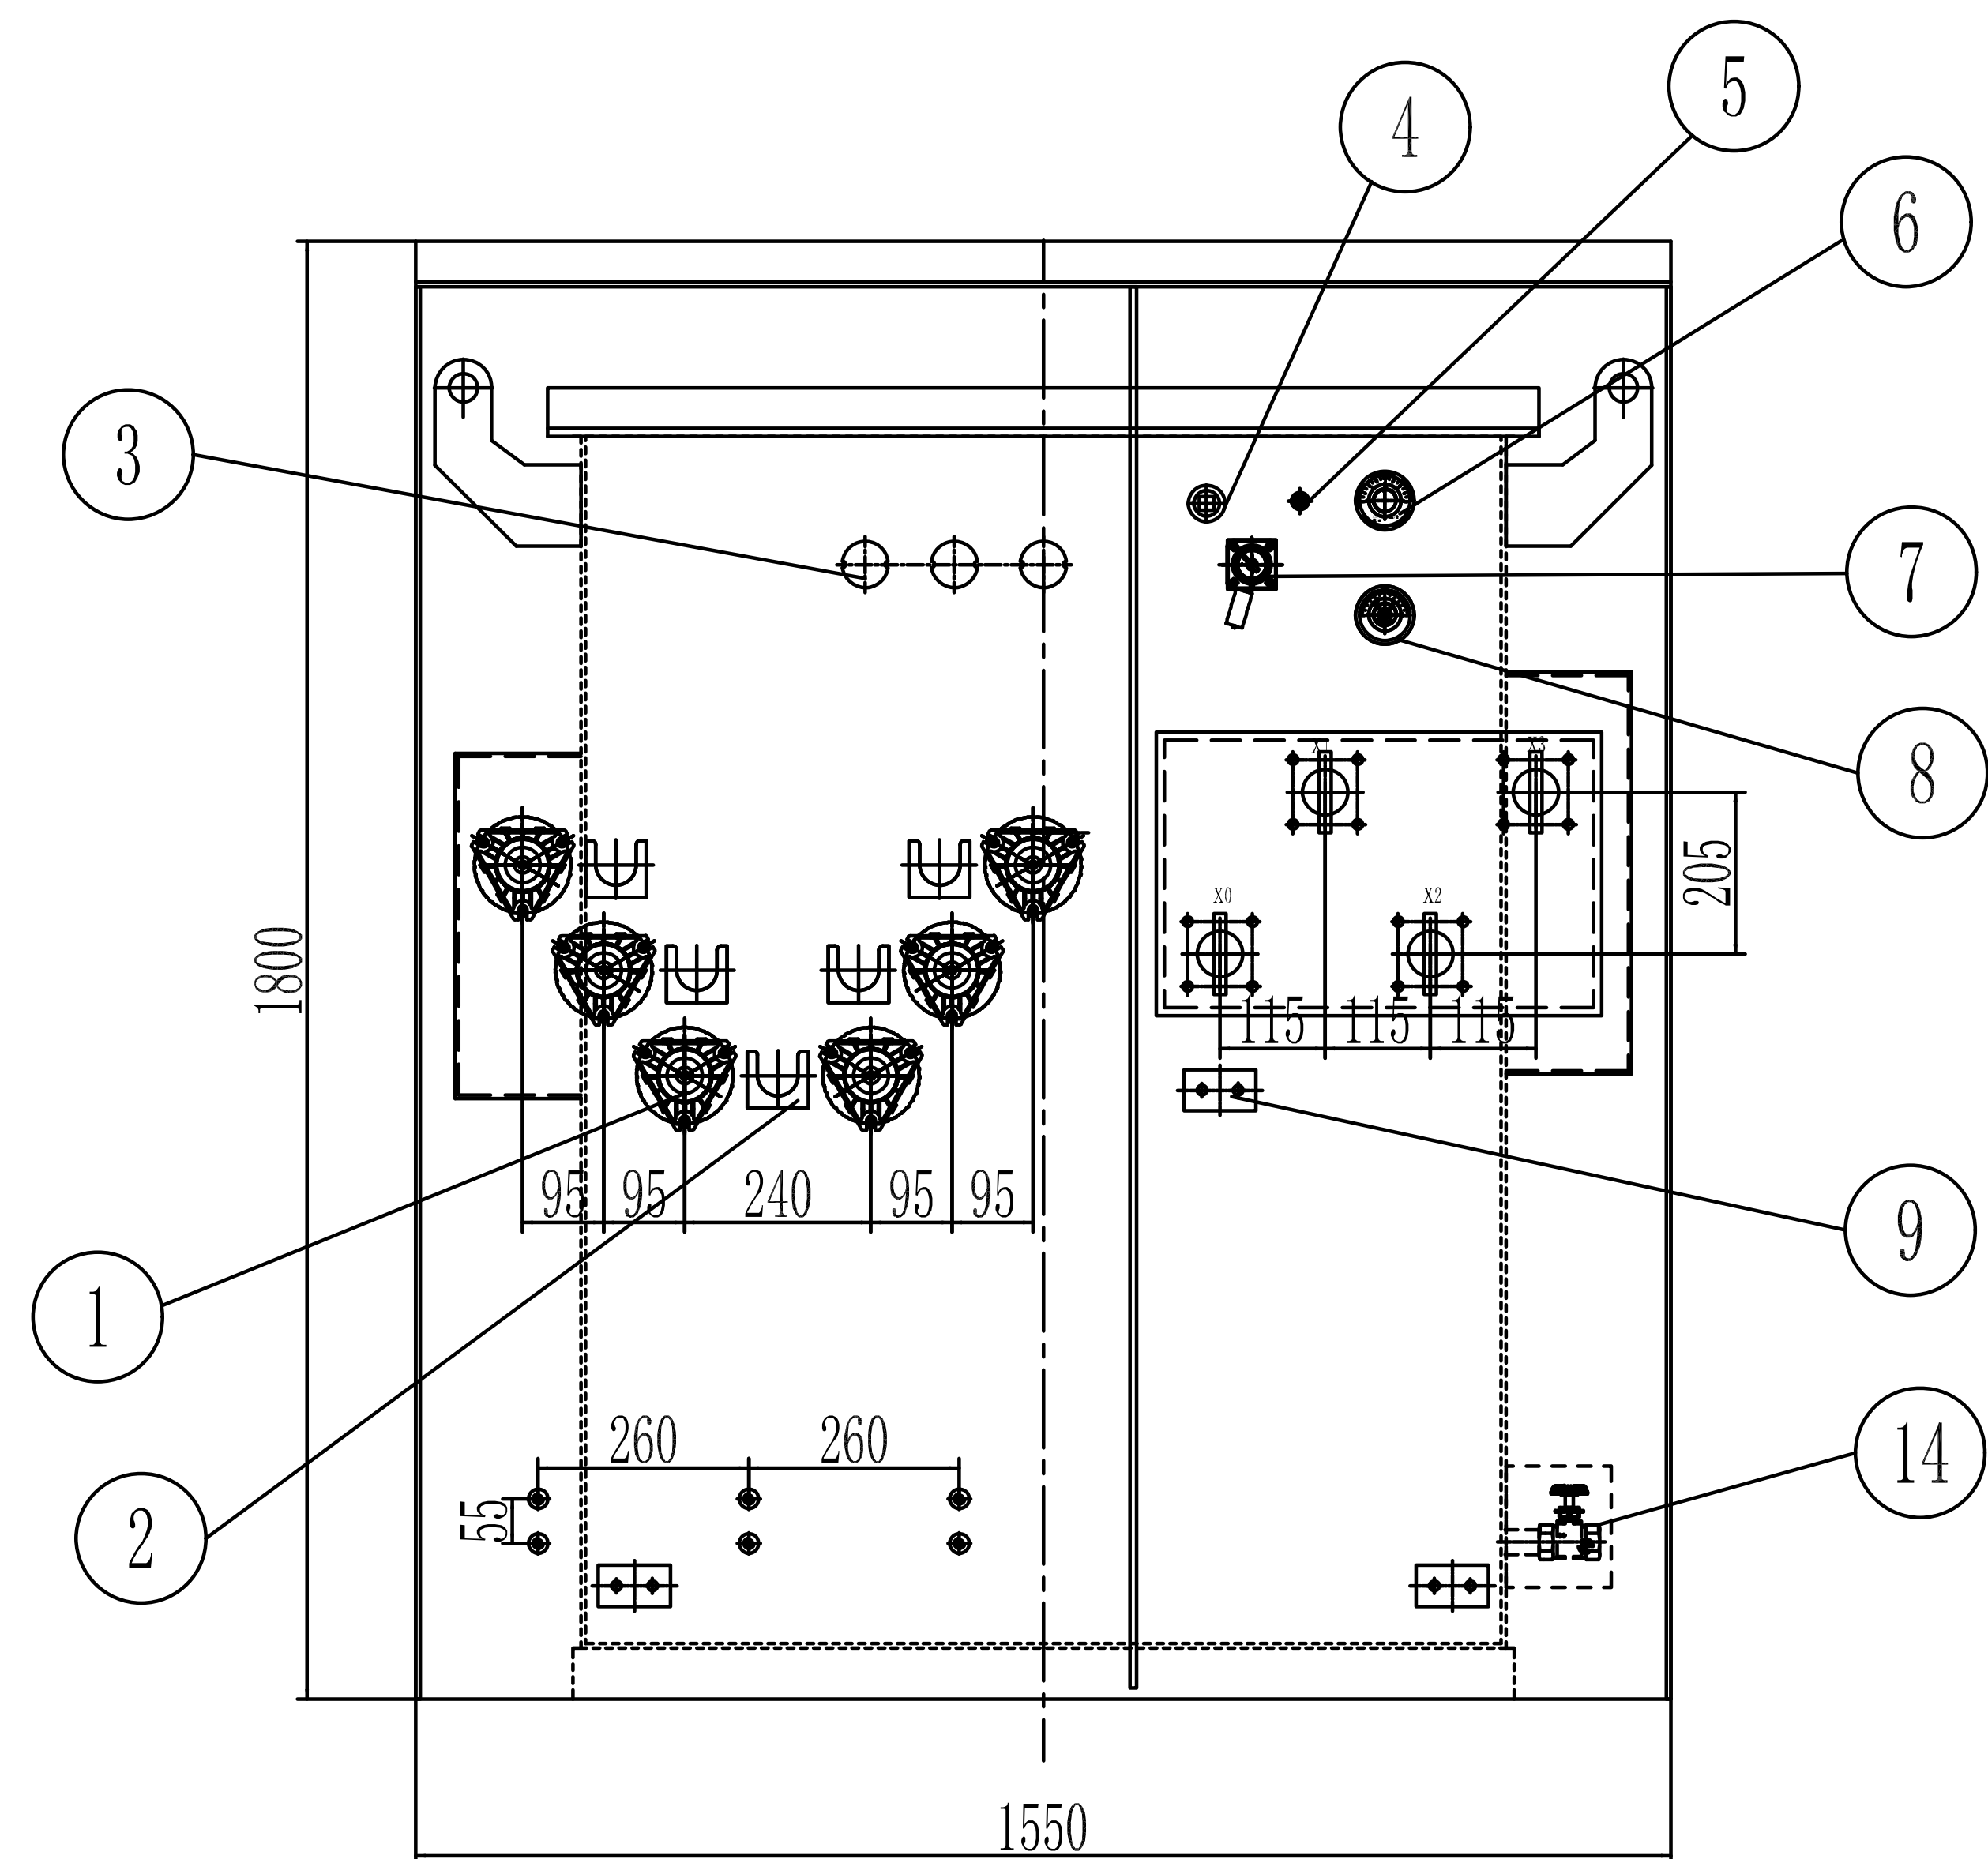


ITEM	WEIGHT (LBS)
CORE WEIGHT	1700 LBS
TOTAL OIL WEIGHT	1080 LBS
TOTAL WEIGHT	4410 LBS


TECHNICAL DATA	
RATING	300kVA
PRIMARY VOLTAGE(V)	12000DELTA
SECONDARY VOLTAGE(V)	480GrY/277
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
CONDUCTOR	ALUMINUM
PRIMARY BIL VOLTAGE	95kV
SECONDARY BIL VOLTAGE	30kV
INSULATING OIL	FR3 OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	3300 W
NO LOAD LOSSES	430 W
IMPEDANCE	3.5-4.5%
ALTITUDE	≤1000m
COLOR	MUNSELL NO. 7.0 GY 3.2/1.5
CORE FORM	THREE-PHASE THREE-COLUMN

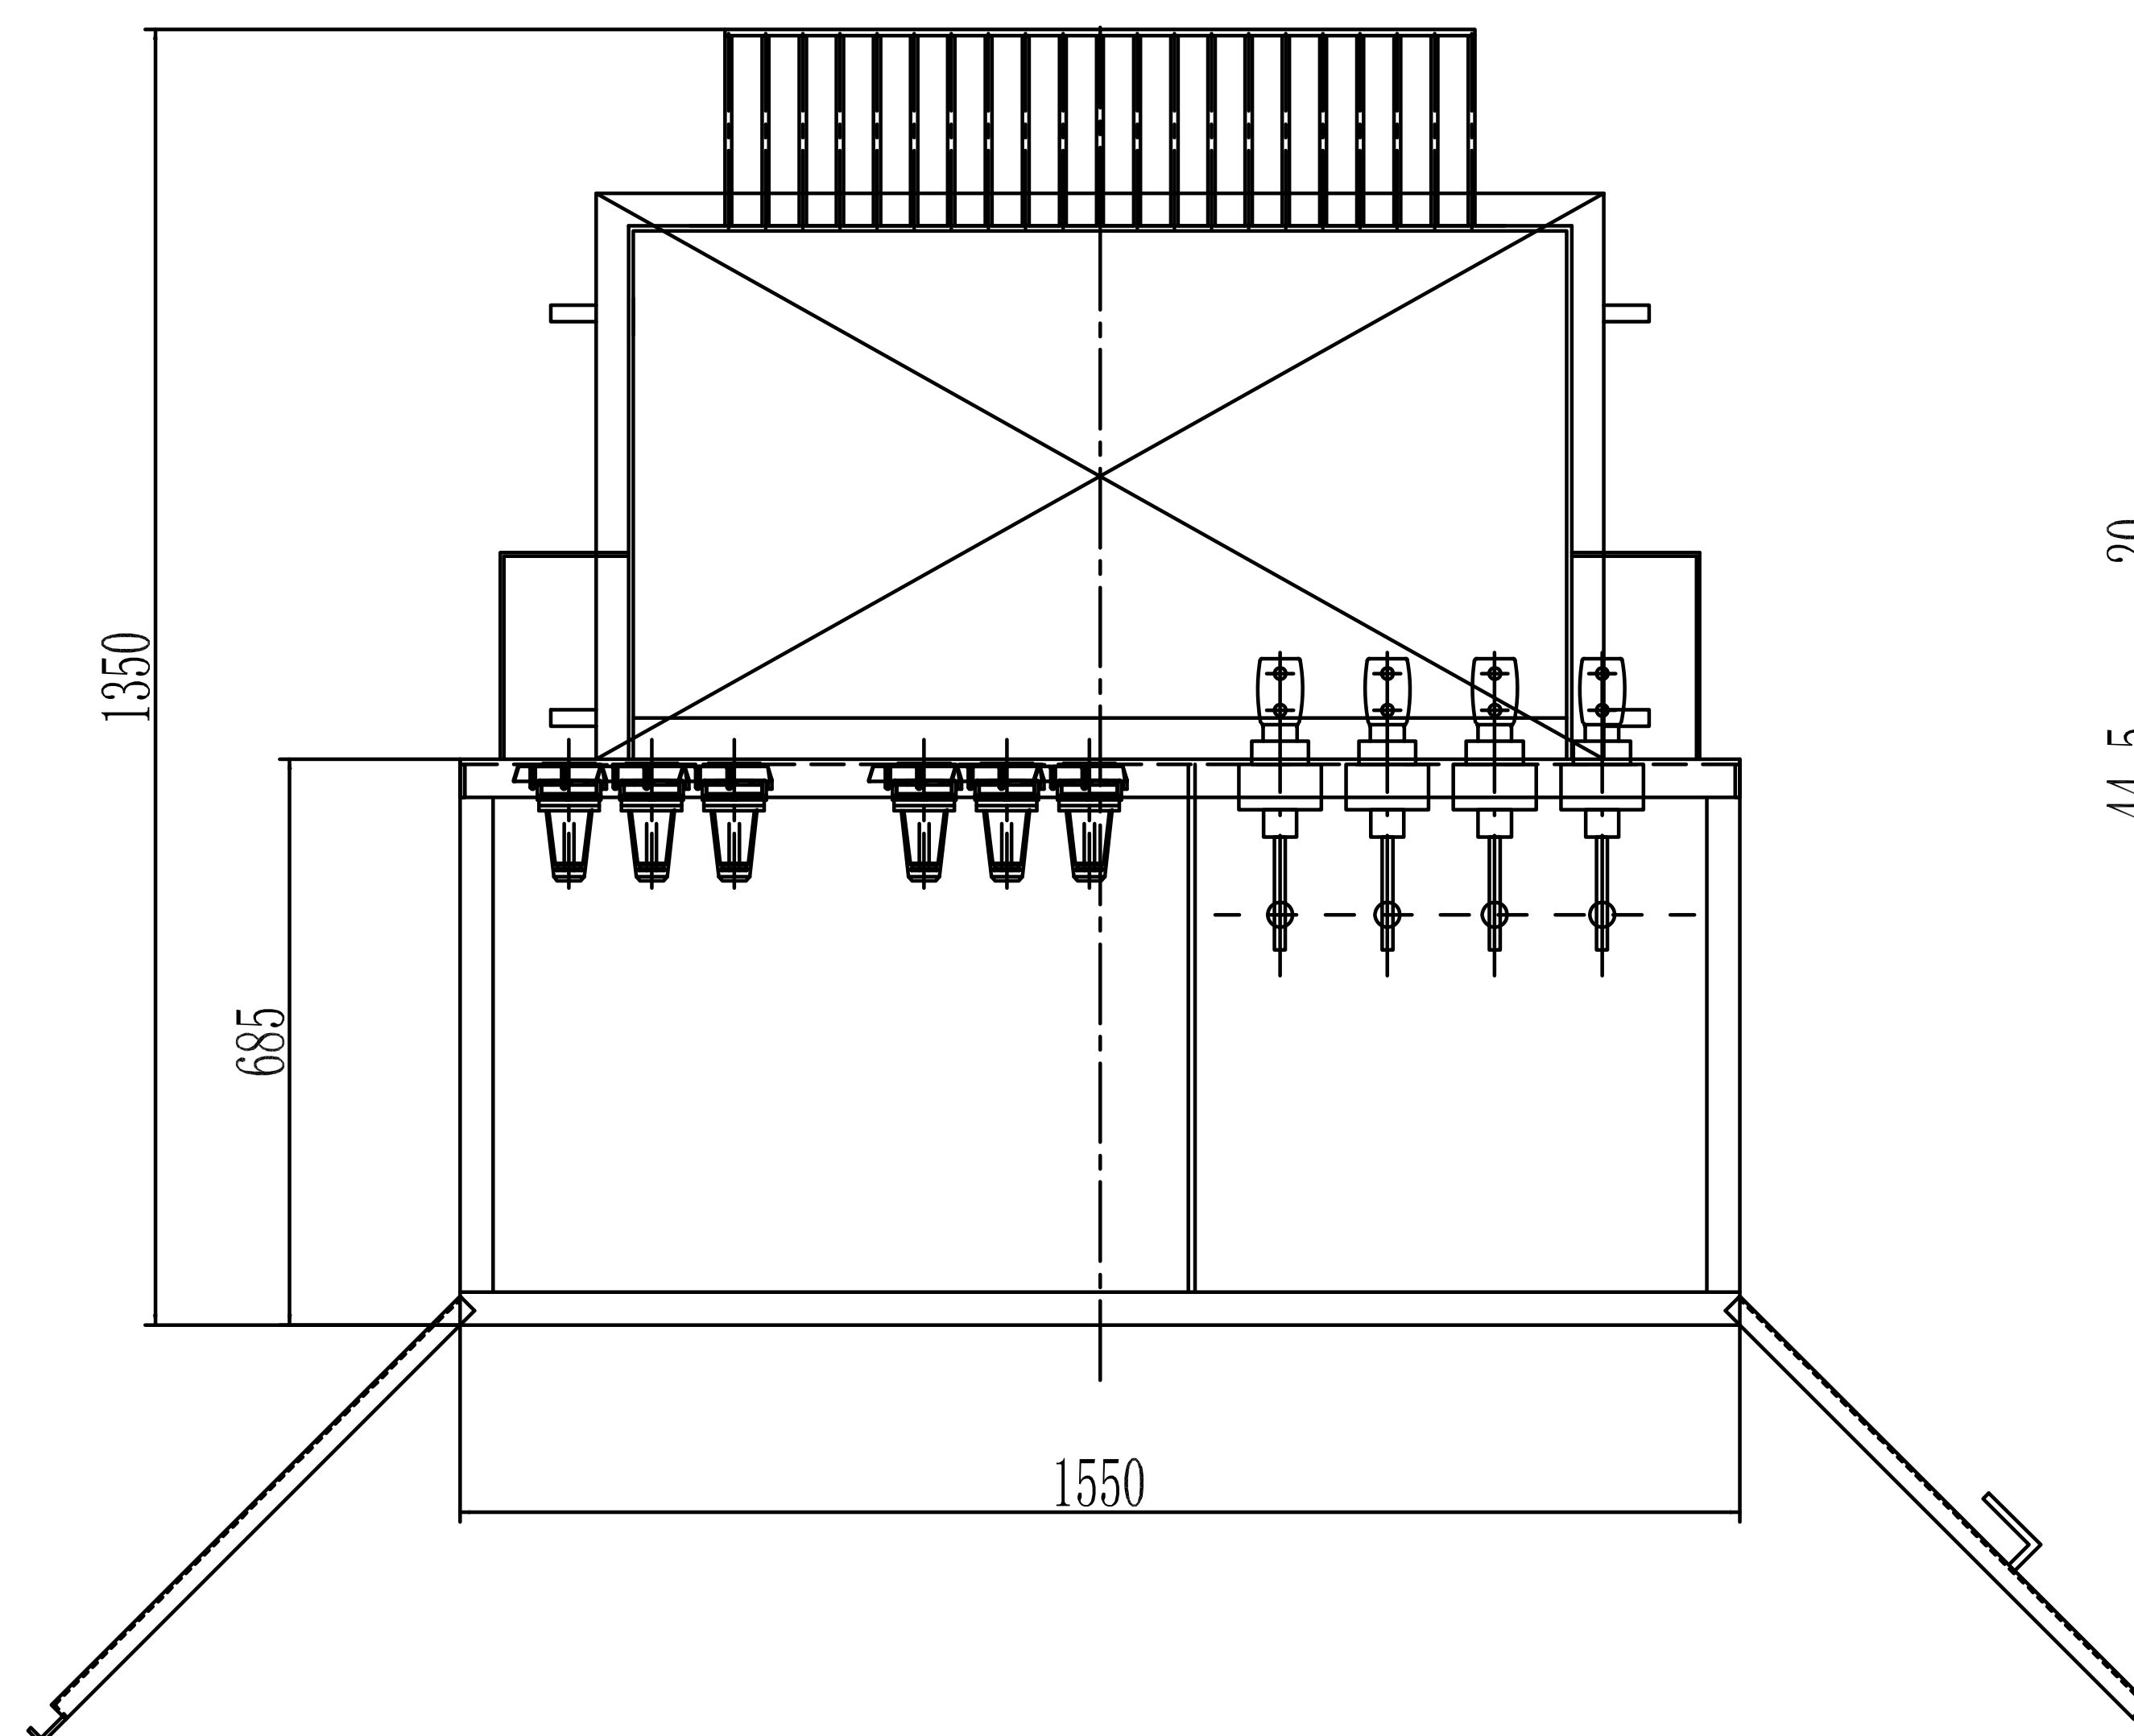

L. V. TERMINAL

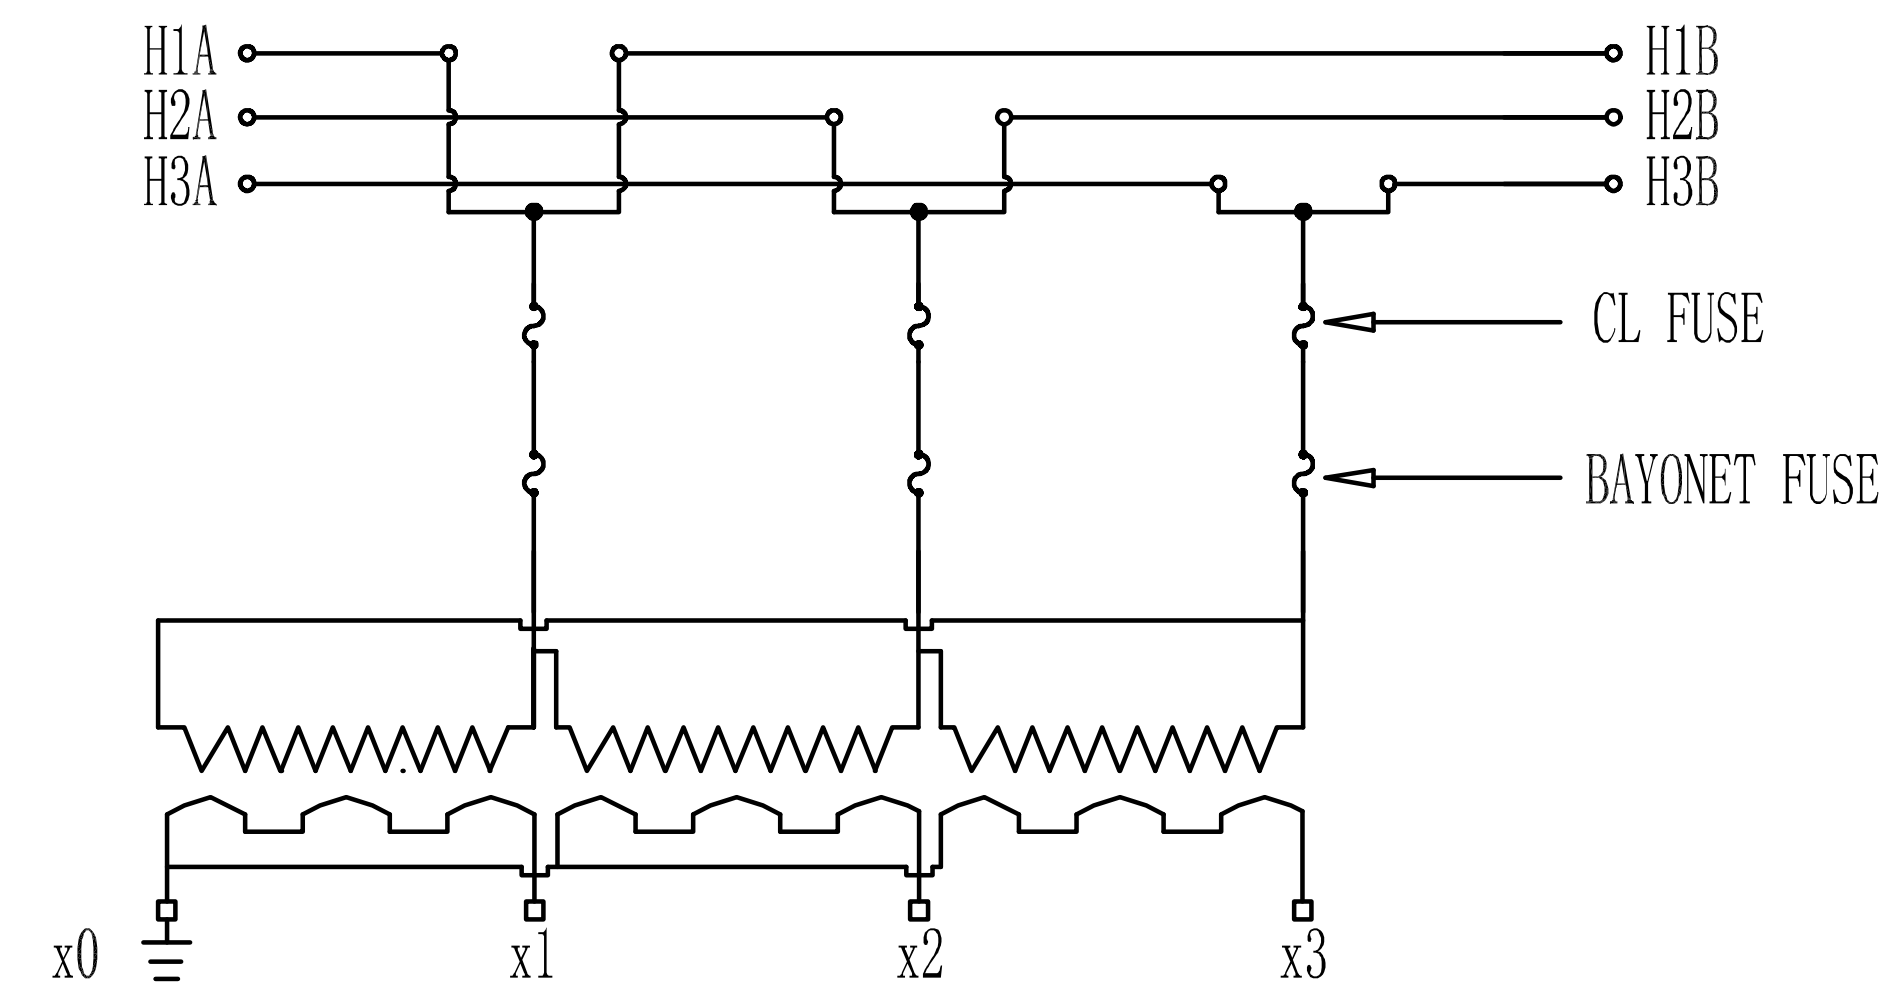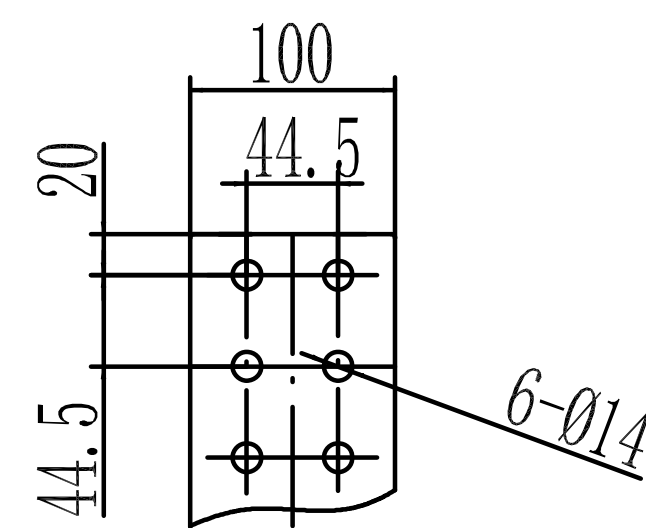

GROUND PAD
STAINLESS STEEL

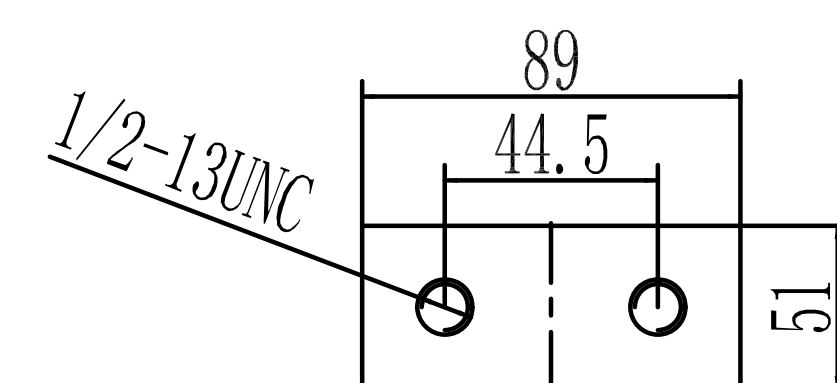

ALL DIMENSION DEVIATIONS: ±10%

17	CONNECTED STEEL-PLATE	4
16	BUSHING SPADE SUPPORT	4
15	NAMEPLATE	2
14	DRAIN VALVE LOCKABLE BOX	1
13	DOOR HANDLE	1
12	LV BUSHING WITH STAINLESS STEEL BASE	4
11	BACK UP FUSE	3
10	LIFTING LUG	4
9	GROUND STEEL PADS	3
8	OIL TEMPERATURE GAUGE	1
7	OIL LEVEL GAUGE	1
6	VACCUM PRESSURE GAUGE	1
5	PRESSURE RELIEF VALVE	1
4	FILL PLUG	1
3	BAYONET FUSE	3
2	PARKING STAND BRACKET	5
1	HW BUSHING WITH 200AMP BUSHING WELL INSERTS	6
ITEM	DESCRIPTION	QTY

ZGSL-H-300/12-0.48
PAD MOUNTED TRANSFORMER

OUTLINE DRAWING

Eaglerise Electric&
Electronic (China)Co.,Ltd.