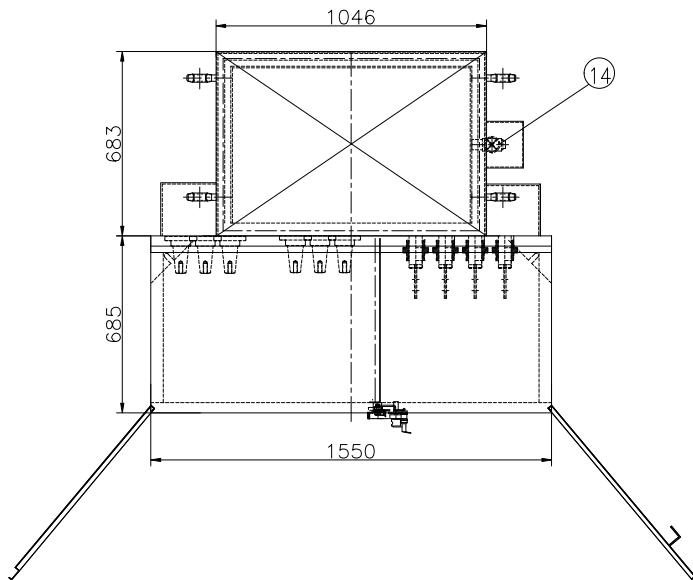
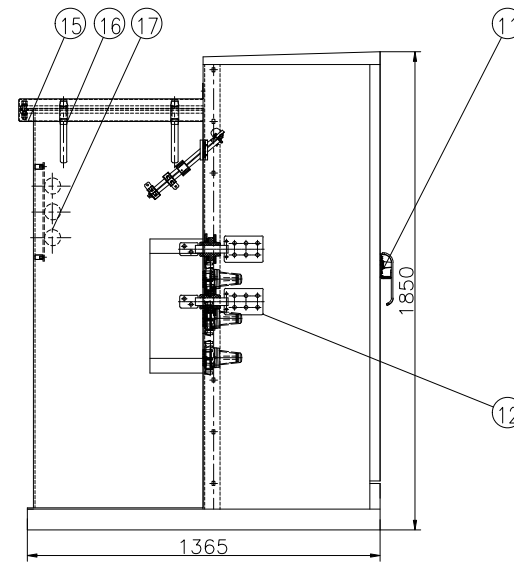
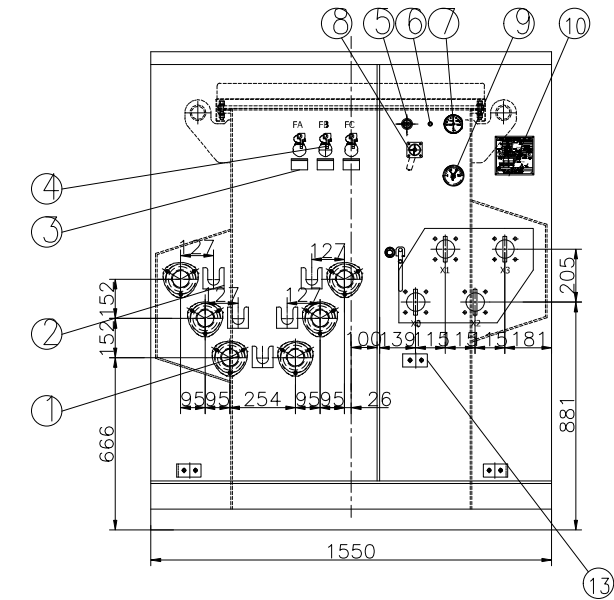


ITEM	WEIGHT(LBS)
CORE WEIGHT	730 LBS
TOTAL OIL WEIGHT	1205 LBS
TOTAL WEIGHT	3036 LBS

TECHNICAL DATA	
RATING	75kVA
PRIMARY VOLTAGE(V)	12000DELTA
SECONDARY VOLTAGE(V)	480GrdY/277
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
CONDUCTOR	ALUMINUM
PRIMARY BIL VOLTAGE	Envirotemp FR3
SECONDARY BIL VOLTAGE	95kV
INSULATING OIL	30kV
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	1310 W
NO LOAD LOSSES	150 W
IMPEDANCE	2.0-3.5%
ALTITUDE	≤1000m
COLOR	MUBSELL NO.7.0 GY 3.2/1.5
CORE FORM	THREE-PHASE THREE-COLUMN

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	HV BUSHING (25kV,200A)	6
2	PARKING STAND BRACKET	5
3	DRIP TRAY	1
4	BAYONET FUSE(4000353 C10 M)	3
5	FILL PLUG	1
6	PRESSURE RELIEF VALVE	1
7	VACUUM PRESSURE GAUGE(Y100)	1
8	OIL LEVEL GAUGE(UHZ-01)	1
9	OIL TEMPERATURE GAUGE(WSS-401)	1
10	NAMEPLATE	1
11	DOOR HANDLE	1
12	LV BUSHING(FTG1-1/1000,6 HOLE,BIL:30kV)	4
13	GROUND STEEL PADS	3
14	1"DRAIN VALVE WITH 3/8" SAMPLER	1
15	FLIP TOP COVER	1
16	LIFTING LUG	4
17	ELSP FUSE(CBUC15080 C100)	3

TYPE PE-R-75/12/0.48					DWG. NAME General Assembly Drawing			
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1	
Mike	Jack	Iris		Sam				REV. NO.
DWG.: PE.3PD.00075.12000.R.277								