

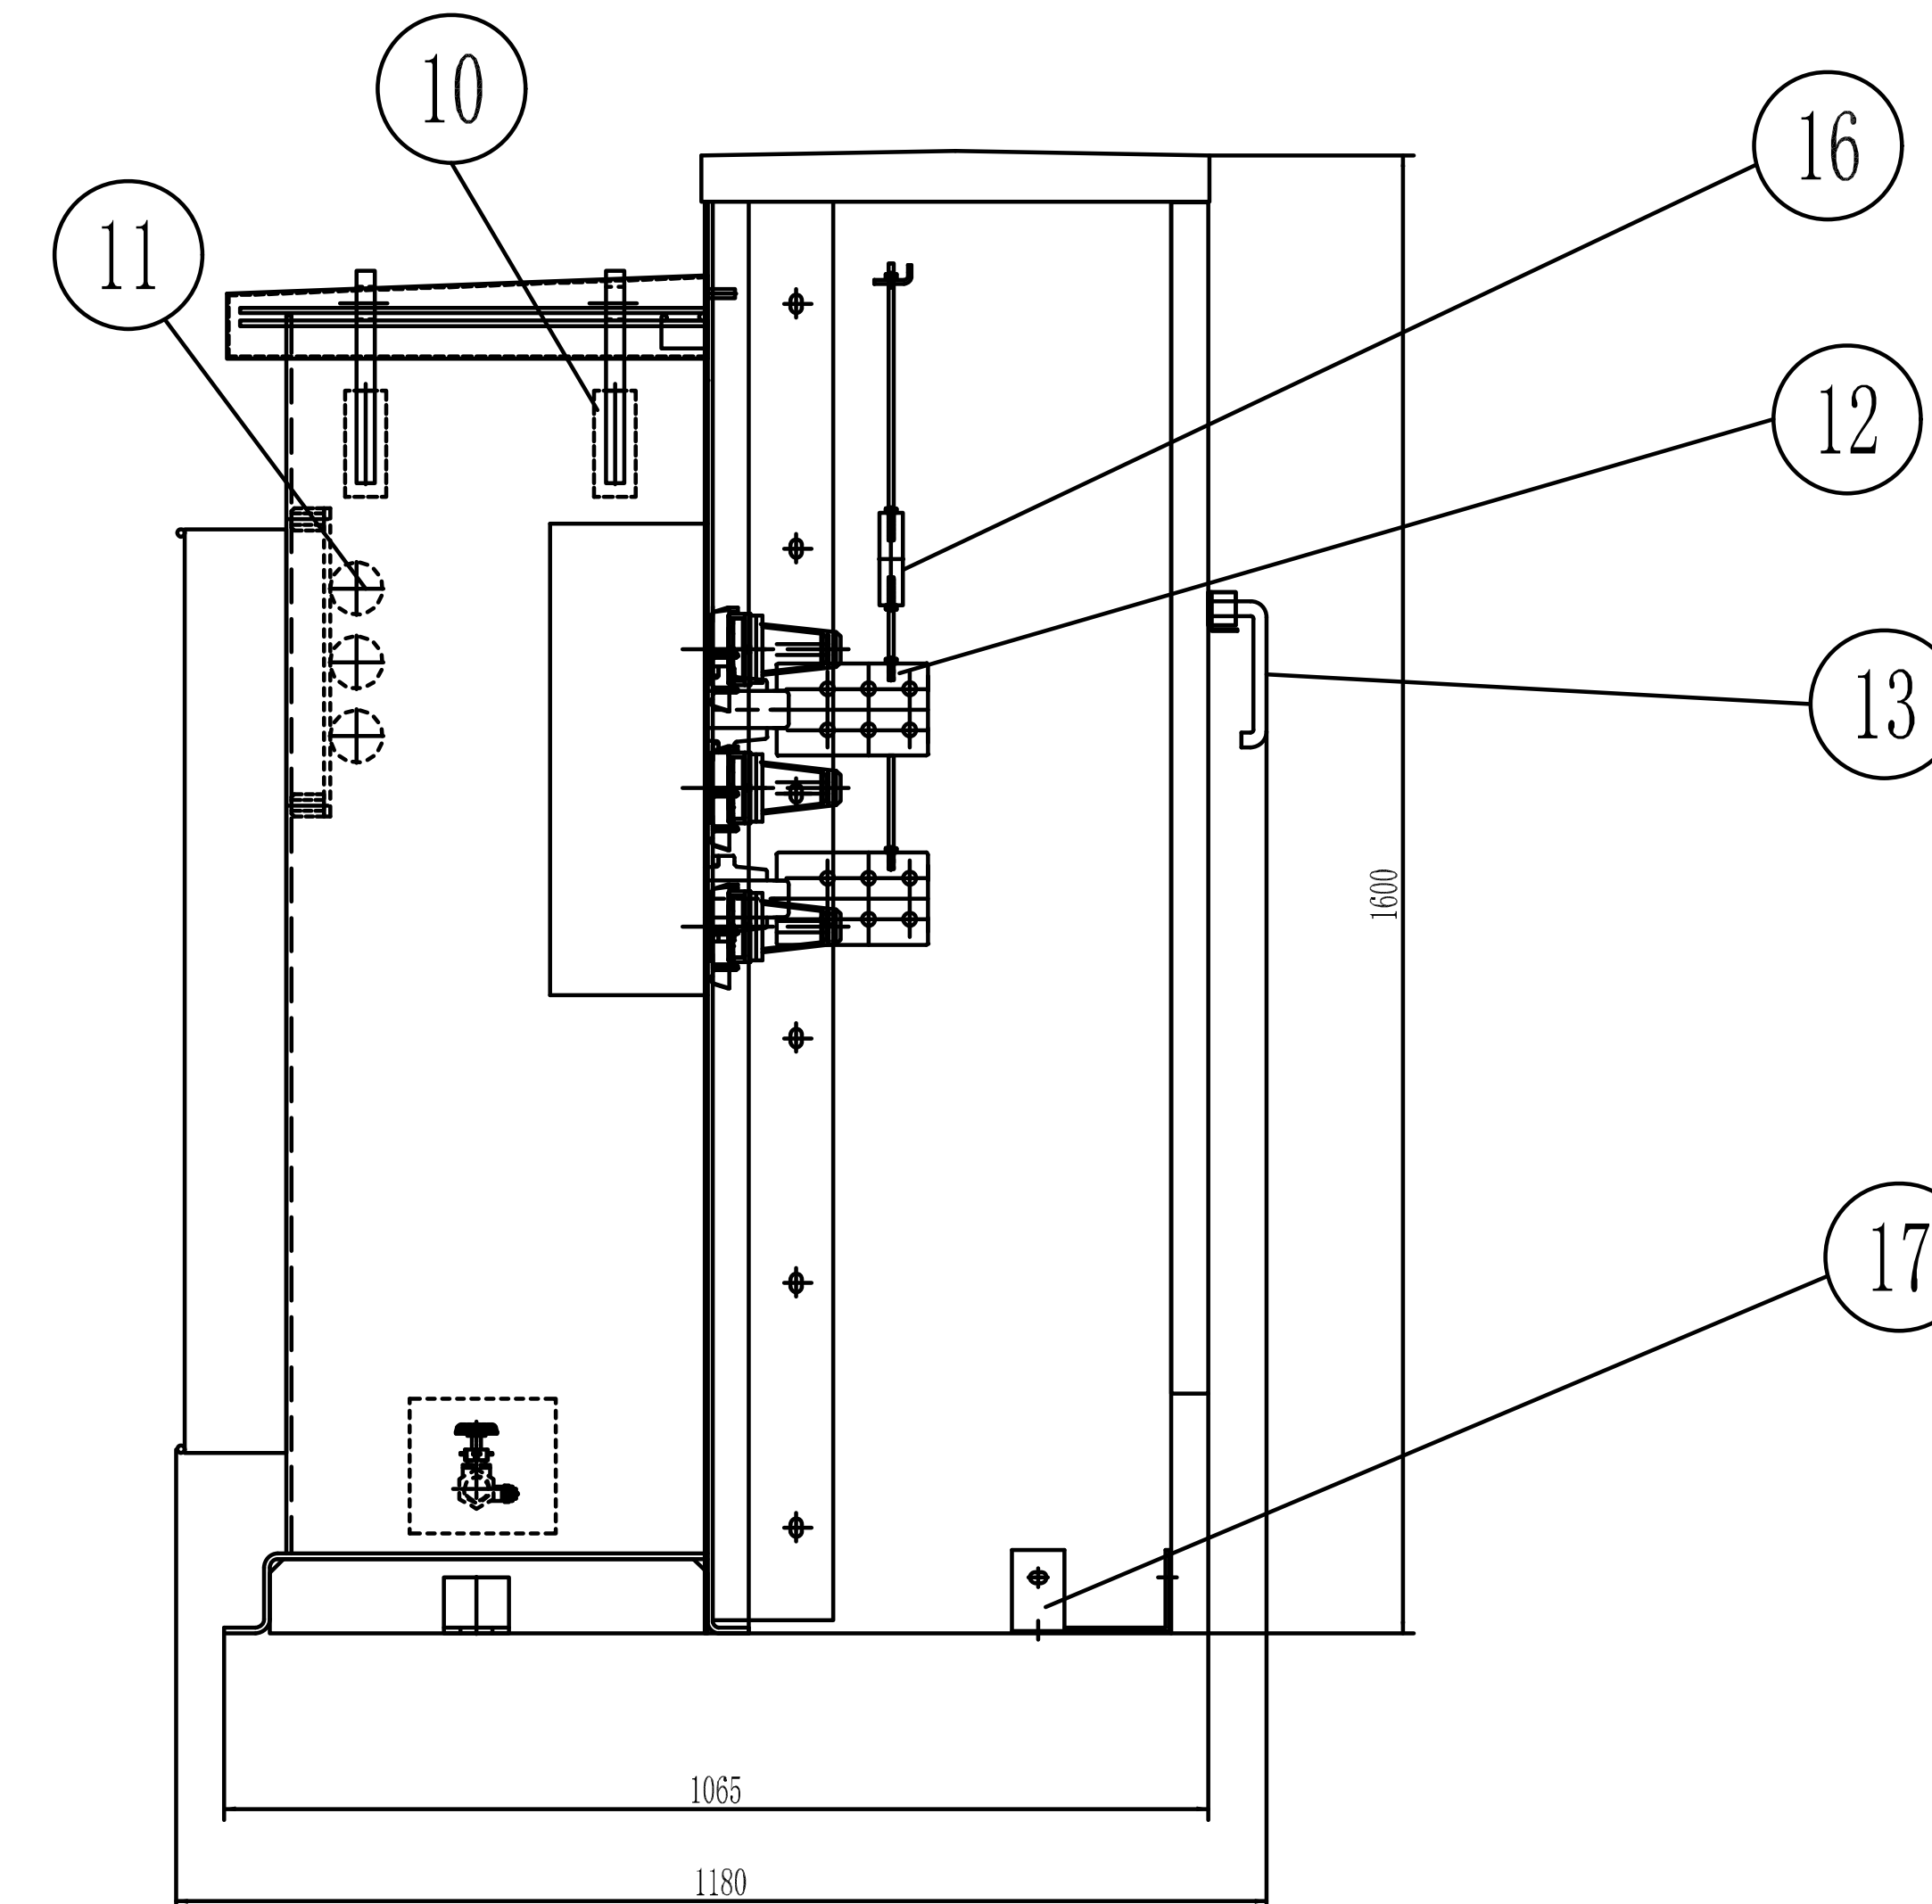
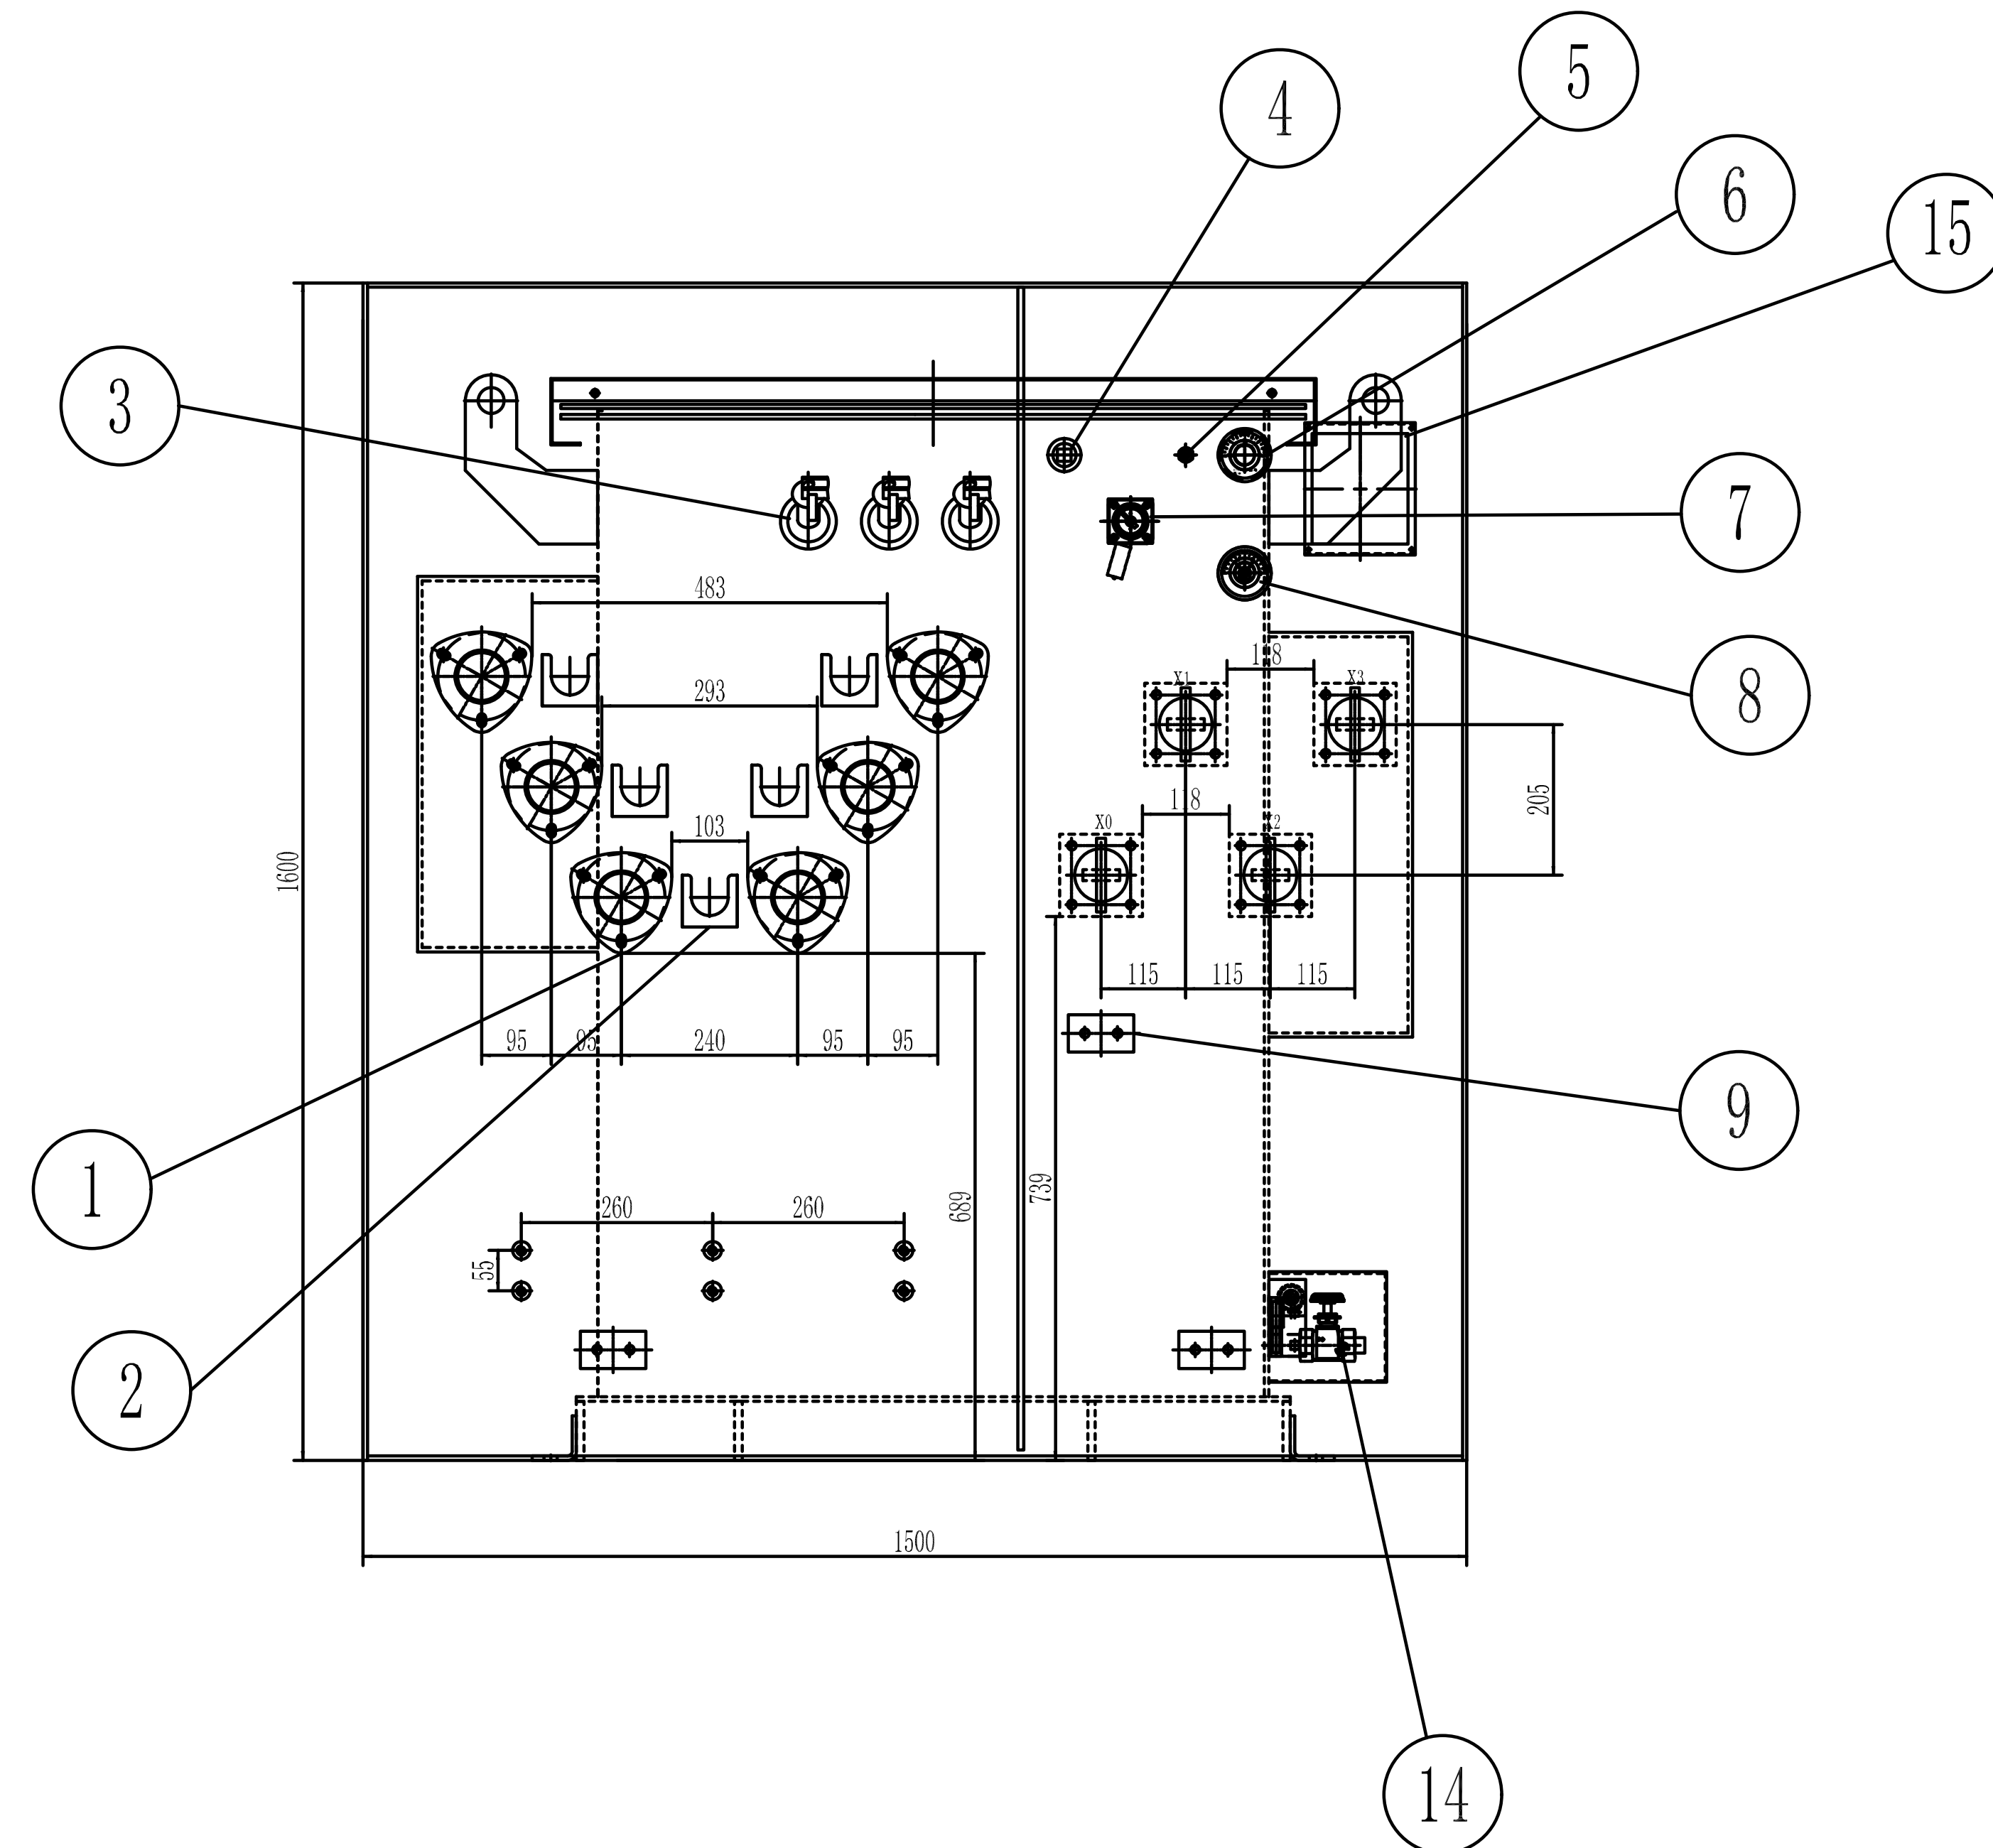


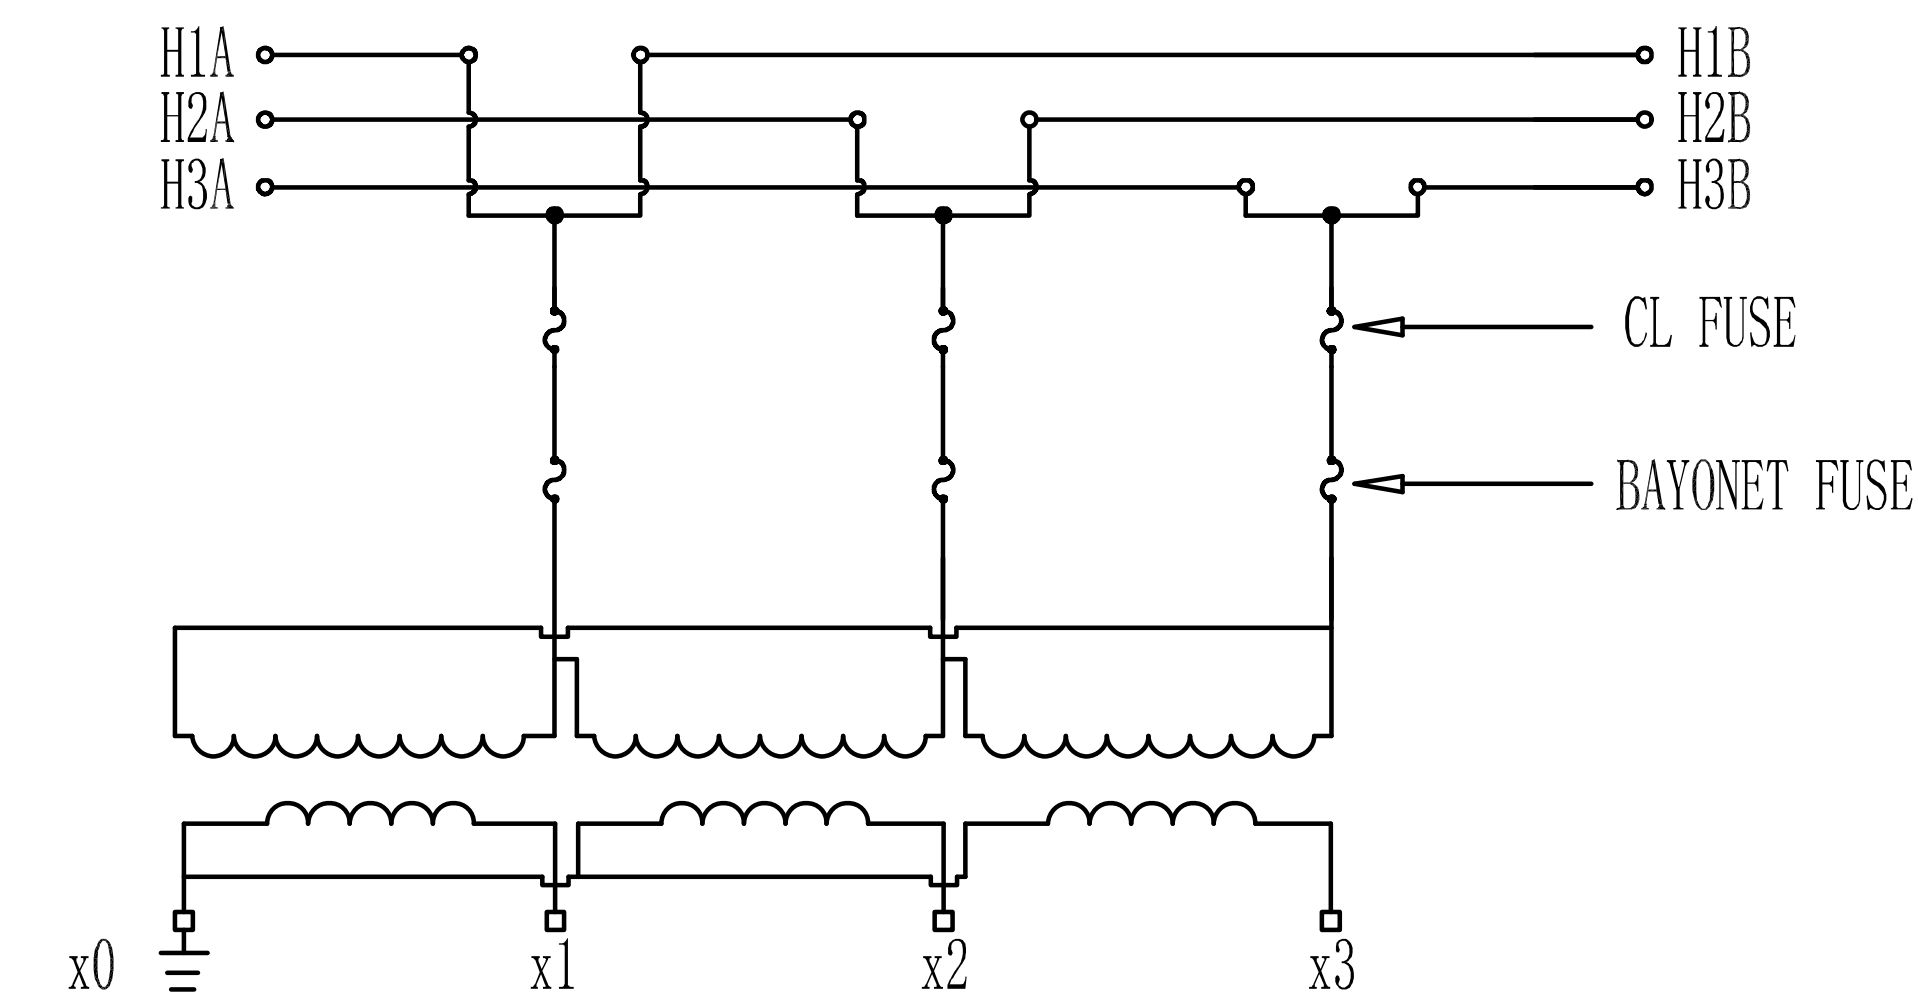


ITEM	WEIGHT (LBS)
CORE WEIGHT	905 LBS
TOTAL OIL WEIGHT	815 LBS
TOTAL WEIGHT	3185 LBS

TECHNICAL DATA	
RATING	150kVA
PRIMARY VOLTAGE (V)	12000DELTA
SECONDARY VOLTAGE (V)	208GrdY/120
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
CONDUCTOR	ALUMINUM
PRIMARY BIL VOLTAGE	95kV
SECONDARY BIL VOLTAGE	30kV
INSULATING OIL	FR3 OIL
TEMPERATURE RISE	65 °C
LOAD LOSS AT RATED VOLTAGE	2310 W
NO LOAD LOSSES	200 W
IMPEDANCE	2~4.5%
ALTITUDE	≤1000m
COLOR	MUNSELL NO. 7.0 GY 3.2/1.5
CORE FORM	THREE-PHASE THREE-COLUMN

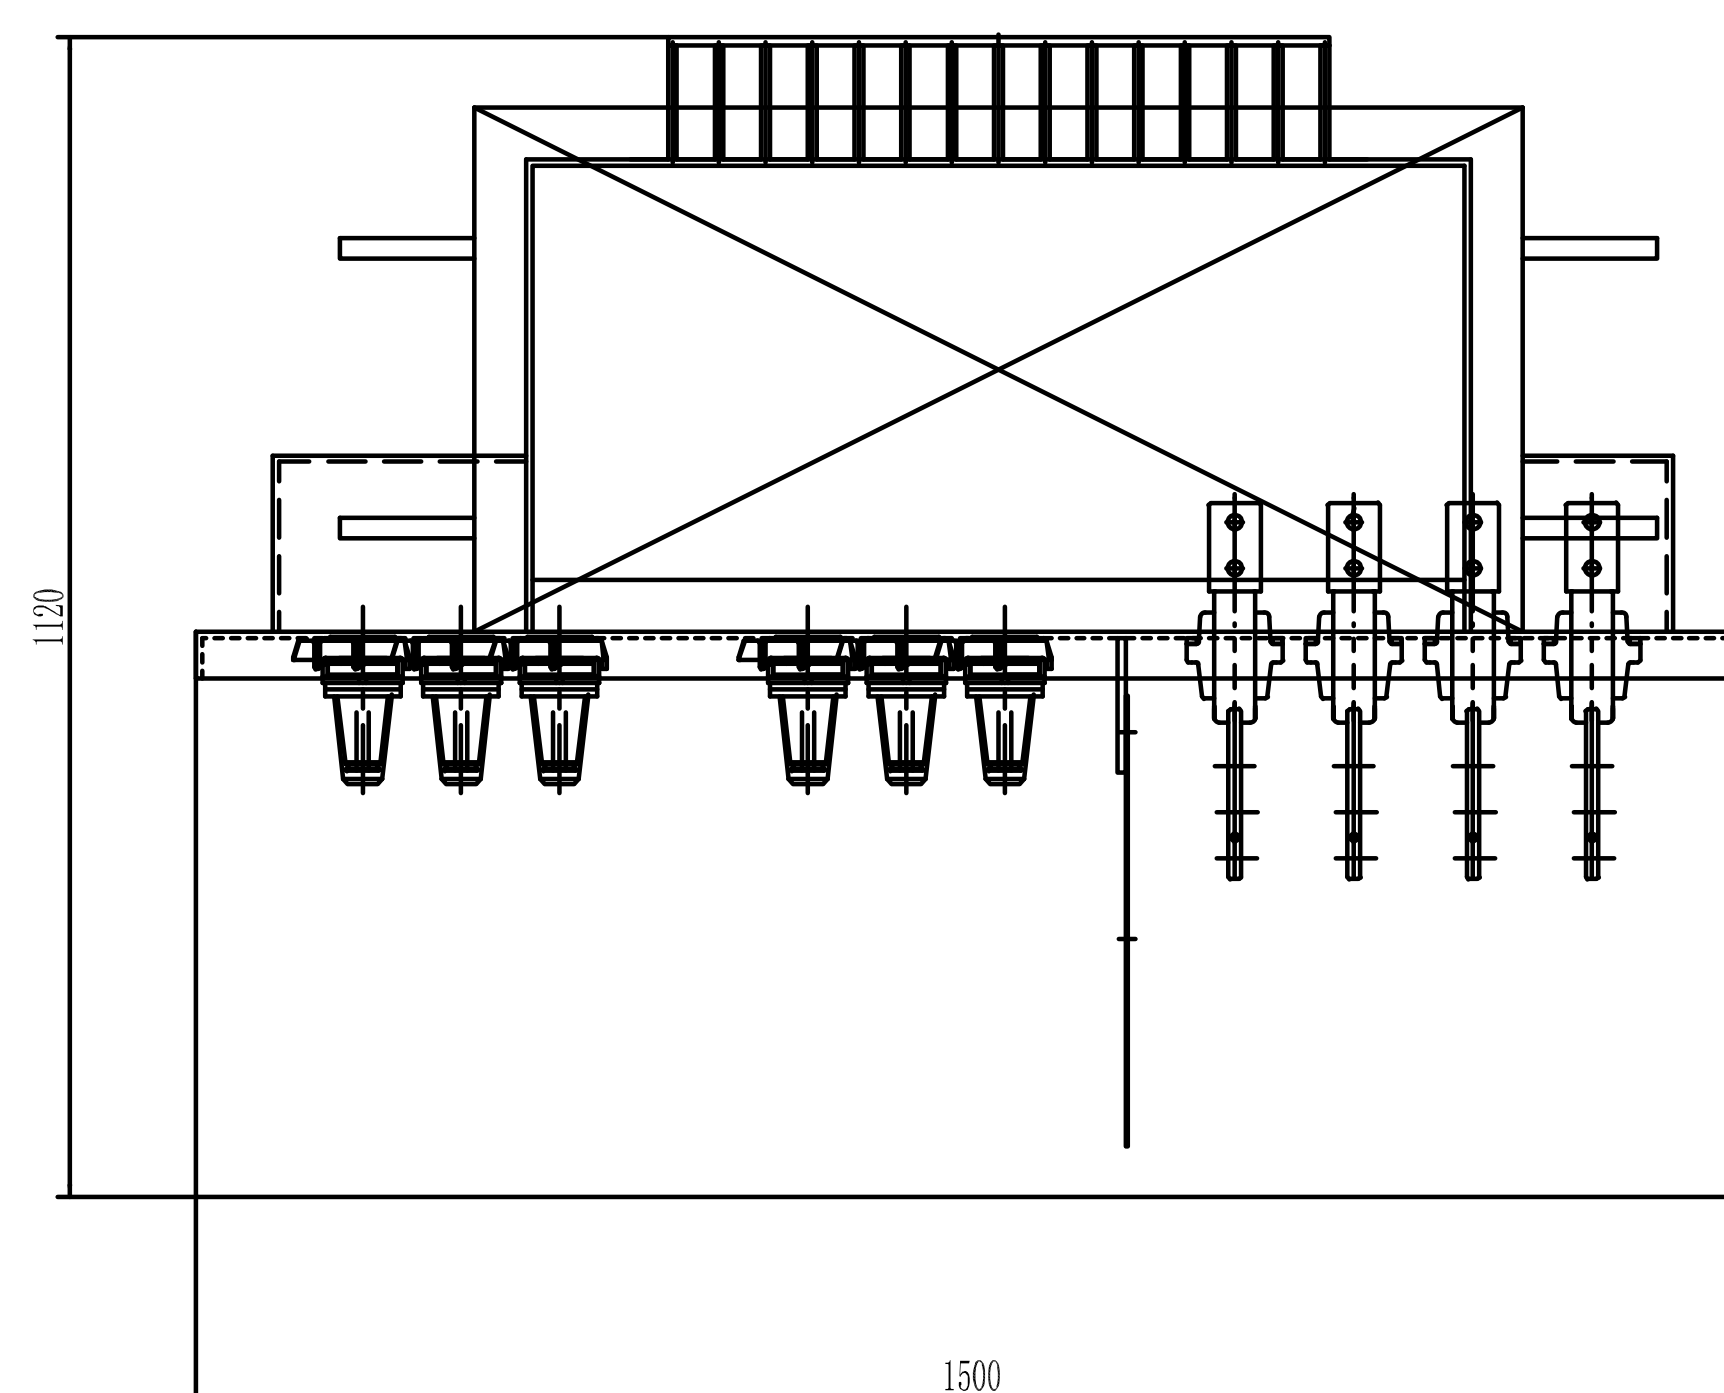

ALL DIMENSION DEVIATIONS: $\pm 10\%$

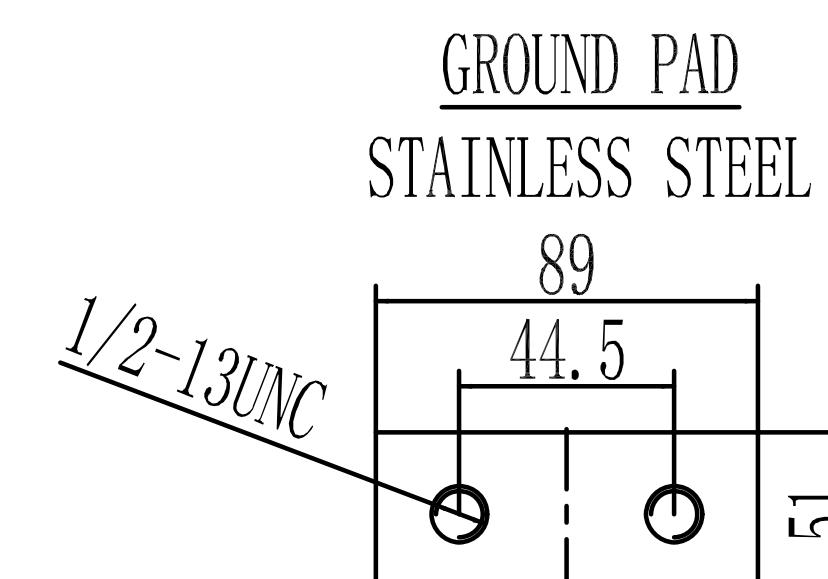

18	BUSHING SPADE SUPPORT	4
17	CONNECTED STEEL-PLATE	4
16	BUSHING SPADE SUPPORT	4
15	NAMEPLATE	2
14	DRAIN VALVE LOCKABLE BOX	1
13	DOOR HANDLE	1
12	LV BUSHING(DRB-1/2000A)	4
11	BACK UP FUSE	3
10	LIFTING LUG	4
9	GROUND STEEL PADS	3
8	OIL TEMPERATURE GAUGE	1
7	OIL LEVEL GAUGE	1
6	VACCUUM PRESSURE GAUGE	1
5	PRESSURE RELIEF VALVE	1
4	FILL PLUG	1
3	BAYONET FUSE	3
2	PARKING STAND BRACKET	5
1	HV BUSHING(25-LB1200) WITH 25KV 200AMP BUSHING WELL INSERTS	6
ITEM	DESCRIPTION	QTY

ZGSL-H-150/12-0.208
PAD MOUNTED TRANSFORMER

OUTLINE DRAWING

Eaglerise Electric&
Electronic (China)Co.,Ltd.