


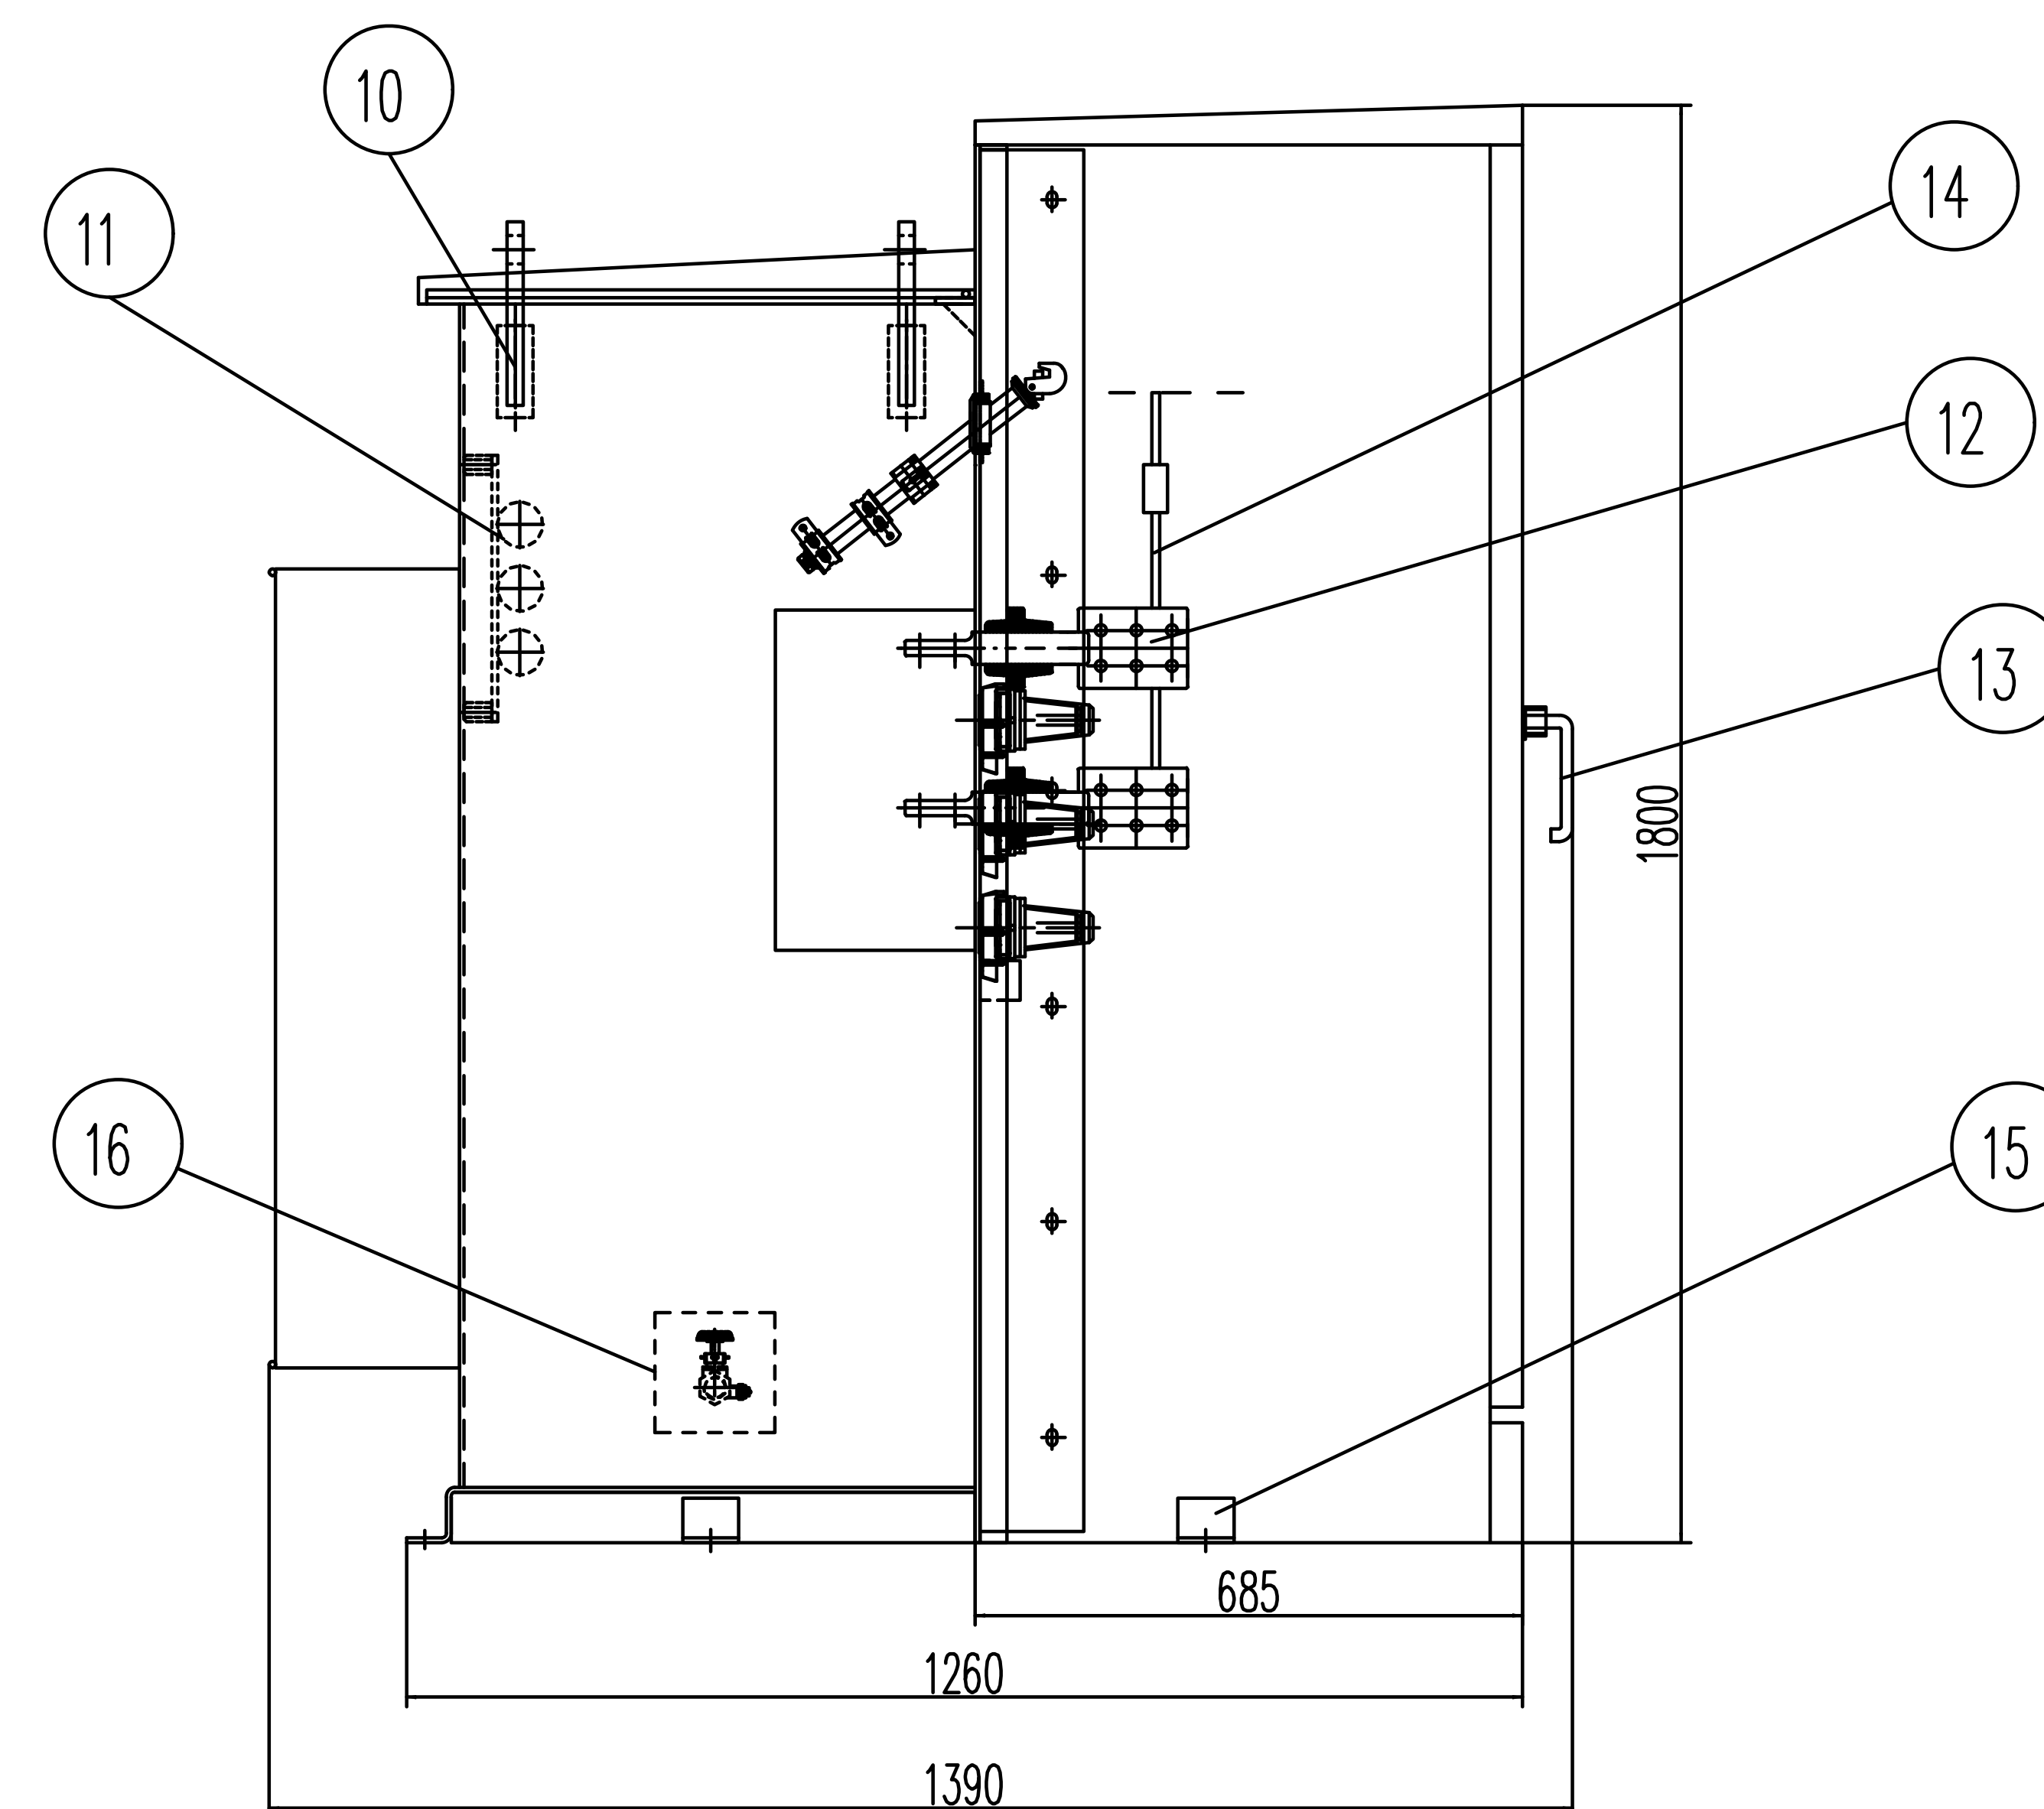
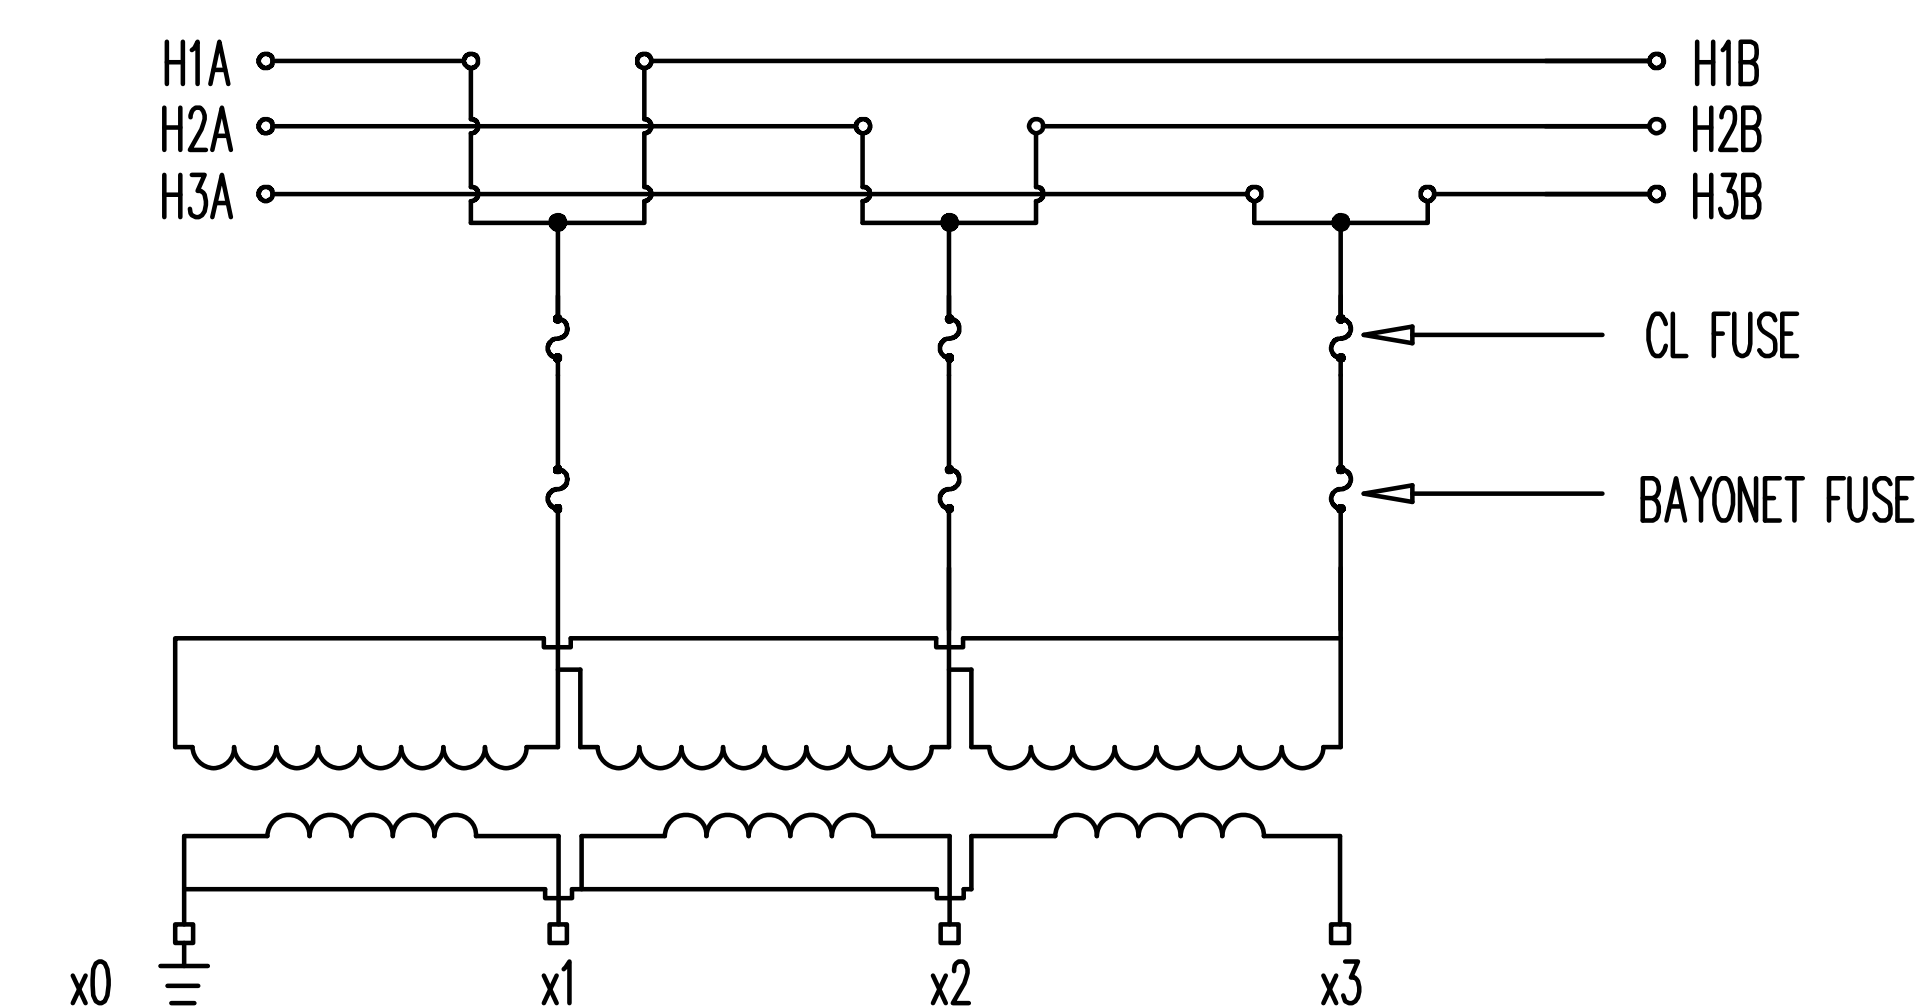


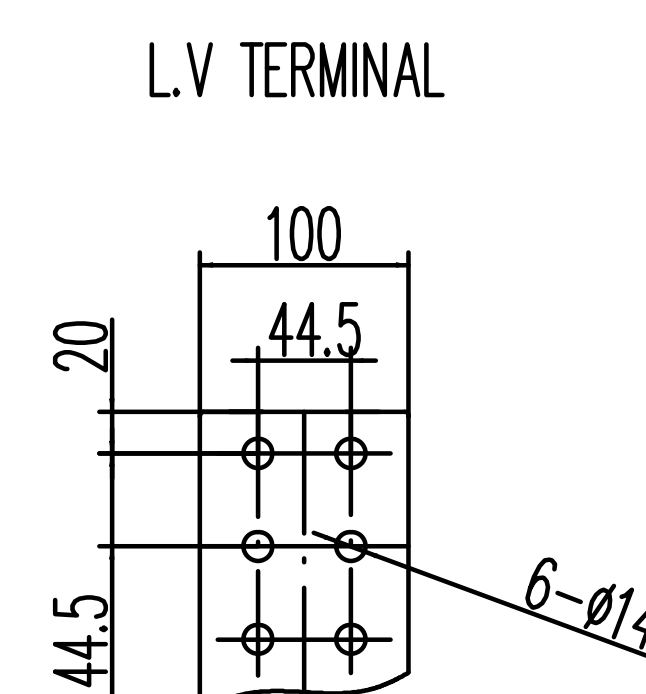

TECHNICAL DATA	
RATING	225kVA
PRIMARY VOLTAGE(V)	12000DELTA
SECONDARY VOLTAGE(V)	208Grdy/120.09
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
CONDUCTOR	ALUMINUM
PRIMARY BIL VOLTAGE	95kV
SECONDARY BIL VOLTAGE	30kV
INSULATING OIL	FR3 OIL
TEMPERATURE RISE	65℃
LOAD LOSS AT RATED VOLTAGE	2900 W
NO LOAD LOSSES	350 W
IMPEDANCE	3.5-4.5%
ALTITUDE	≤1000m
COLOR	MUNSELL NO.7.0 GY 3.2/1.5
CORE FORM	THREE-PHASE THREE-COLUMN

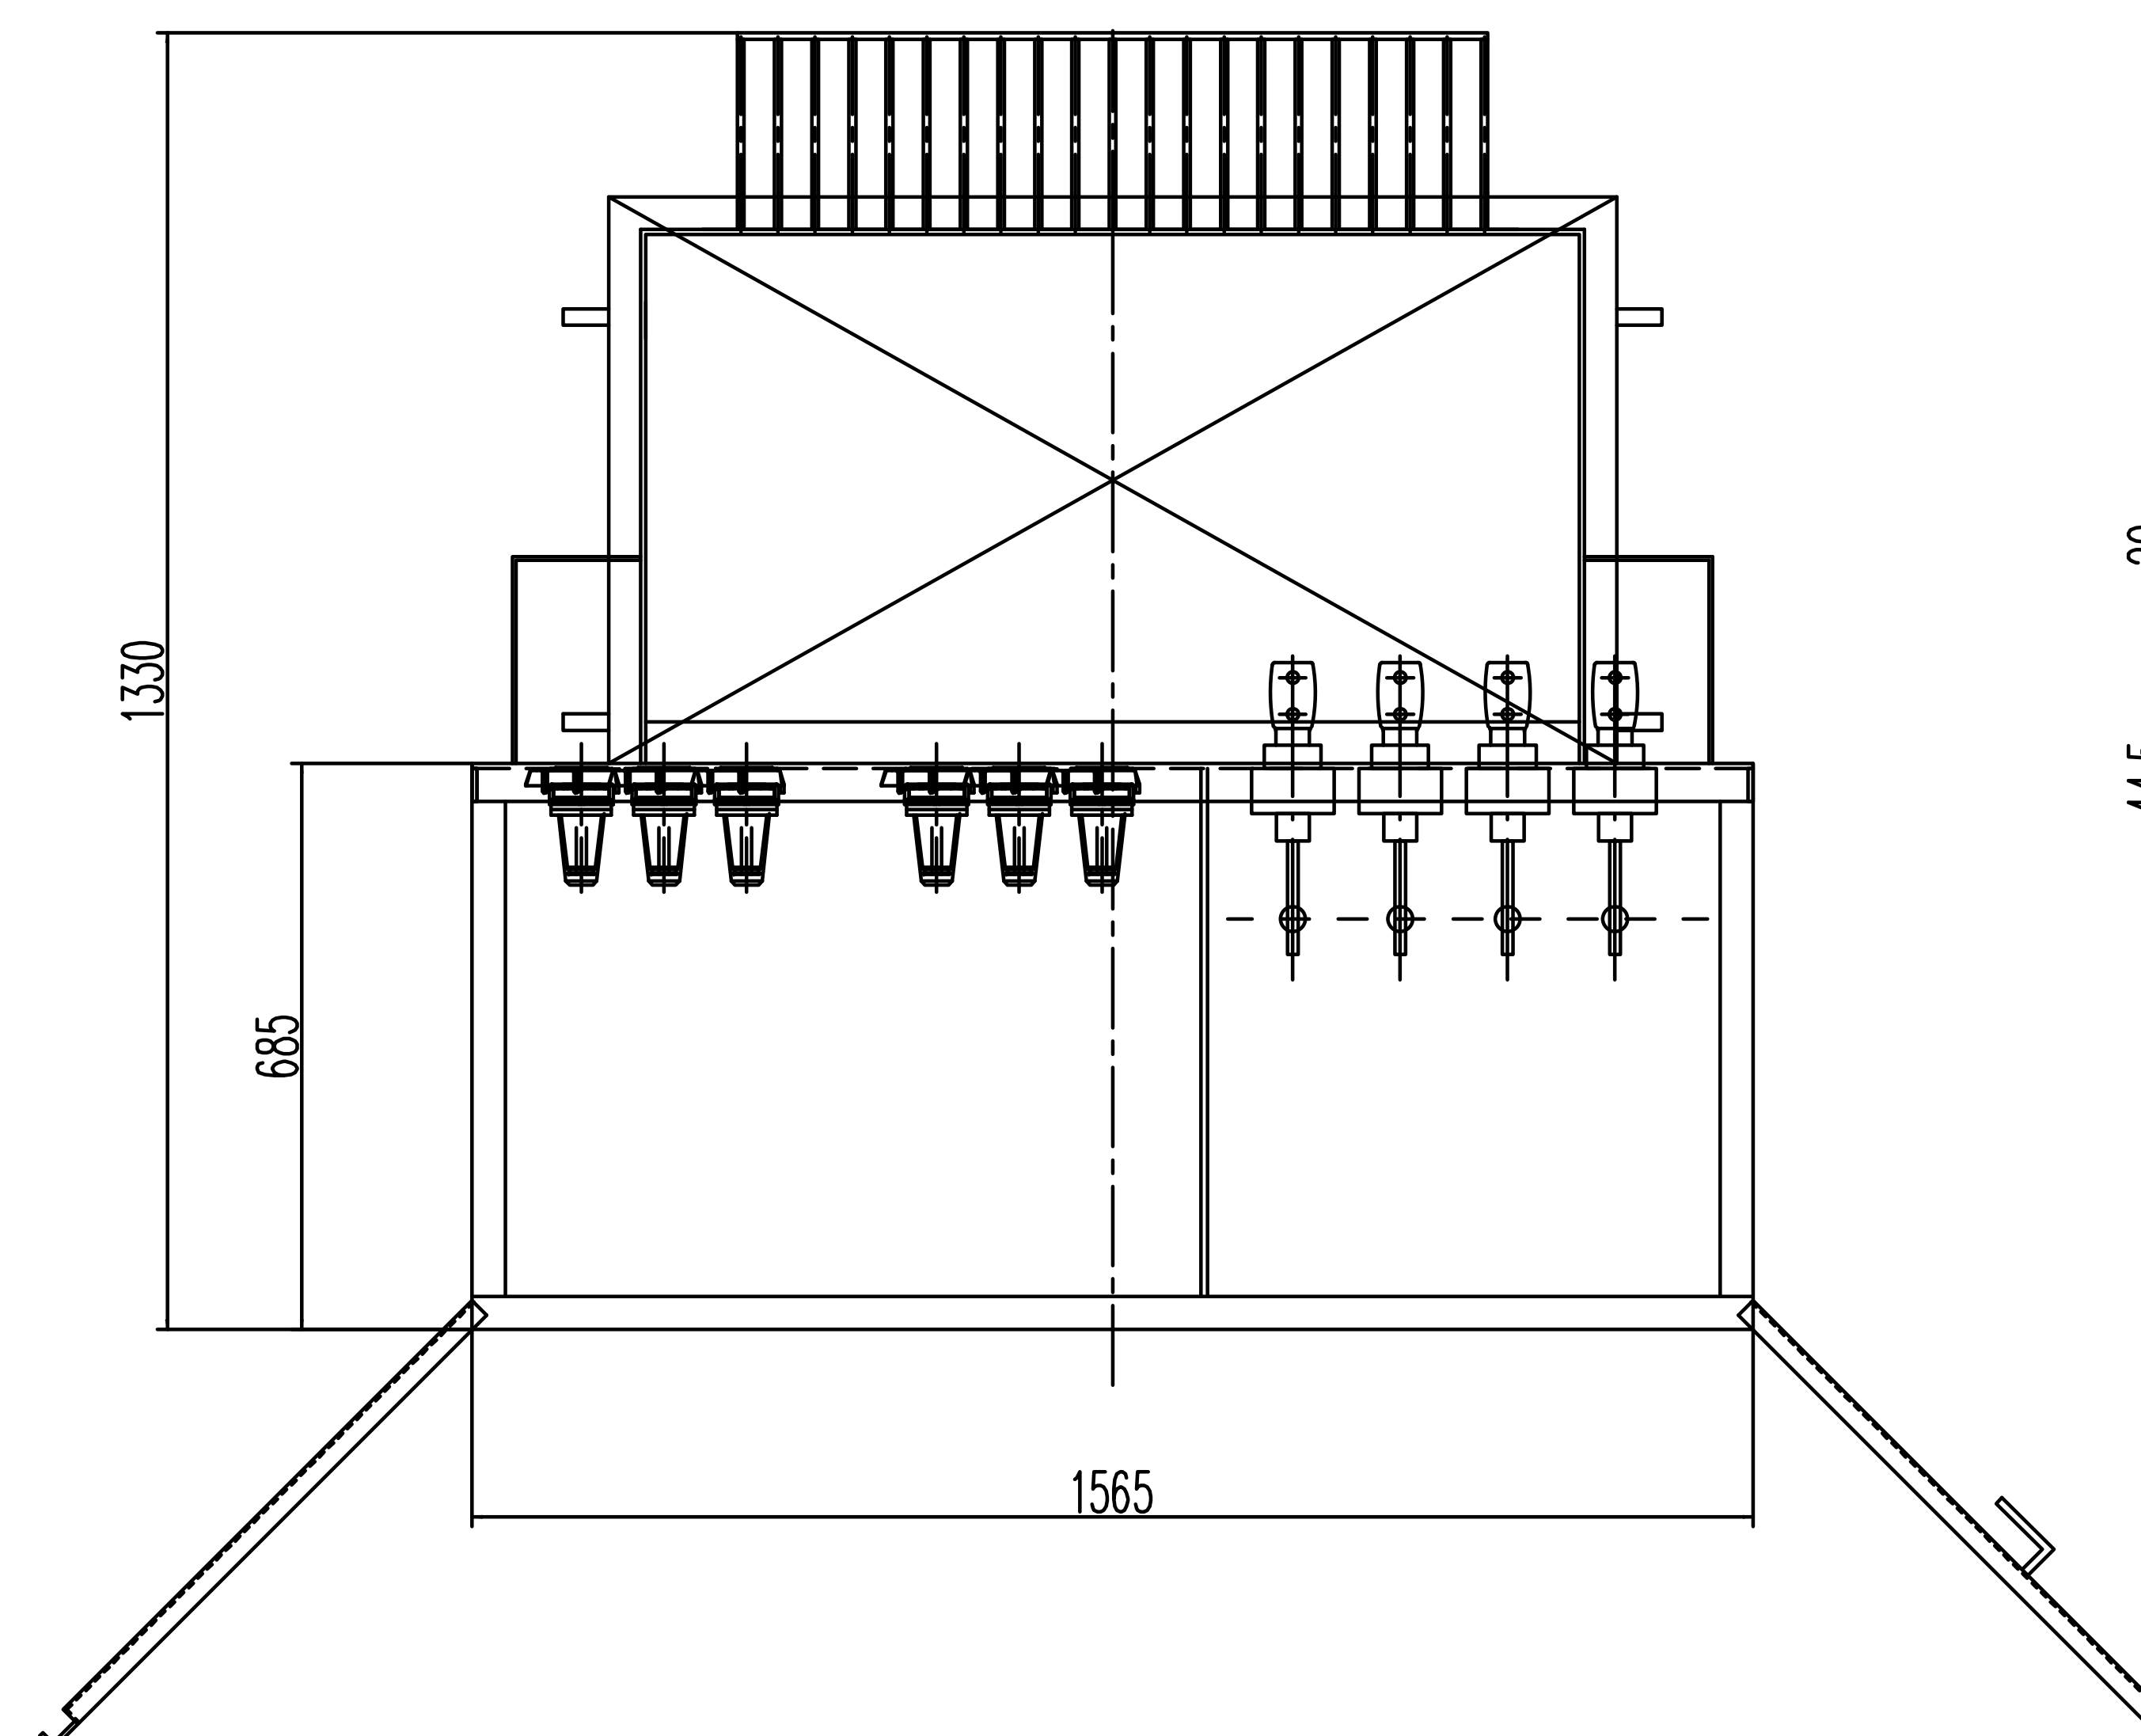

ALL DIMENSION DEVIATIONS: $\pm 10\%$

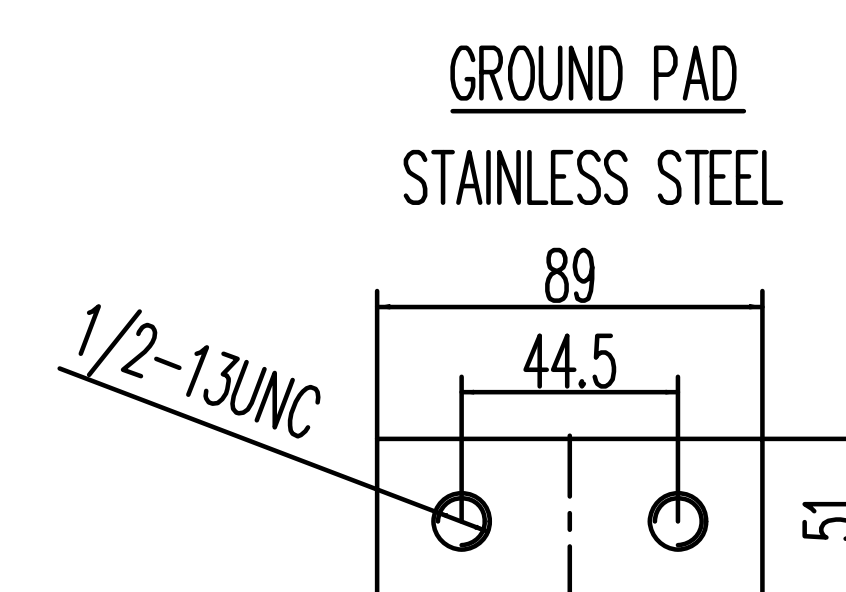

17	NAMEPLATE	2
16	DRAIN VALVE LOCKABLE BOX	1
15	CONNECTED STEEL-PLATE	4
14	BUSHING SPADE SUPPORT	4
13	DOOR HANDLE	1
12	LV BUSHING WITH STAINLESS STEEL BASE (DRB-1/2000A)	4
11	BACK UP FUSE	3
10	LIFTING LUG	4
9	GROUND STEEL PADS	3
8	OIL TEMPERATURE GAUGE	1
7	OIL LEVEL GAUGE	1
6	VACCUUM PRESSURE GAUGE	1
5	PRESSURE RELIEF VALVE	1
4	FILL PLUG	1
3	BAYONET FUSE	3
2	PARKING STAND BRACKET	5
1	HV BUSHING (25-LB200)WITH 25KV 200AMP BUSHING WELL INSERTS	6
ITEM	DESCRIPTION	QTY

ZGSLB-H-225/12/0.48

PAD MOUNTED TRANSFORMER

OUTLINE DRAWING

Eaglerise Electric &
Electronic (China) Co., Ltd.