
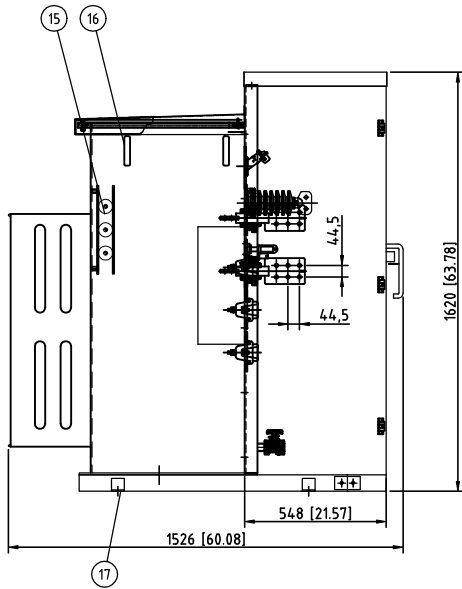
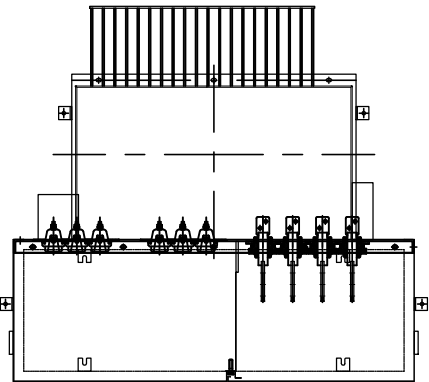


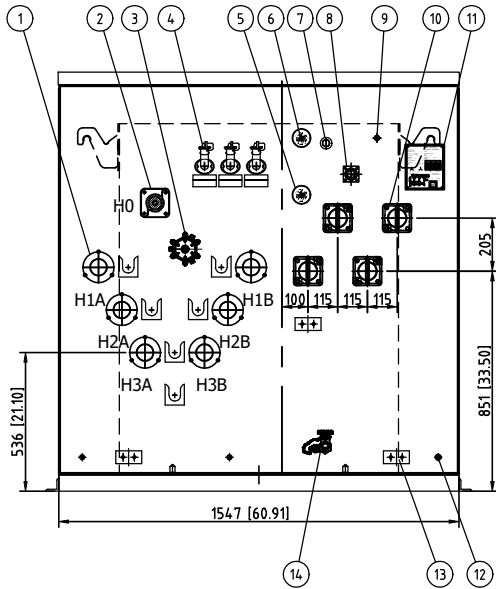

Note:
The above external dimensions are for reference only and the order should be performed based on the real size.

ITEM	WEIGHT(Kg)
Body weight	780
Tank & accesories	940
Total oil weight	550
Total weight	2270

Rating	kVA	500
Phase		3
Frequency	Hz	60
H.V.	V	12470
L.V.	V	208Y/120
Vector Group		YNyn0
Core Limbs		3 legged core
Material of winding		aluminium
No Load Loss	W	600(+10%)
Load Loss	W	5410 (+6%)
Impedance	%	6.0 (±7.5%)
Altitude		<1000m
INSULATING OIL		mineral oil (45#)

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	Hv bushing (TGZ-15/200)	6
2	Neutral Bushing (TG-15/208)	1
3	Tap changer (WSL 63/20-6×5	1
4	Bayonet fuse (4000358C10M)	3
5	Oil thermometer (BWS-70)	1
6	Vacuum manometer (YZ-70)	1
7	Pocket	1
8	Oil-level indicator (UHZ-01)	1
9	Hand valve (YSF)	1
10	Lv bushing (1.0KV 1600A)	4
11	Nameplate	1
12	Ground terminal	3
13	2-hole horiz nema grd pad	5
14	Drain valve	1
15	Elsp fuse (CBUC15100C100)	3
16	Lifting lug	4
17	Connected steel-plate	4
18		

TYPE					DWG. NAME			
ZGSL-500/12.47/0.208					General Assembly Drawing			
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1	
Mike W.	Iris J.	Ella W		Sam S.	JIEZOU POWER			REV. NO.
1.710.3478.1								
								