
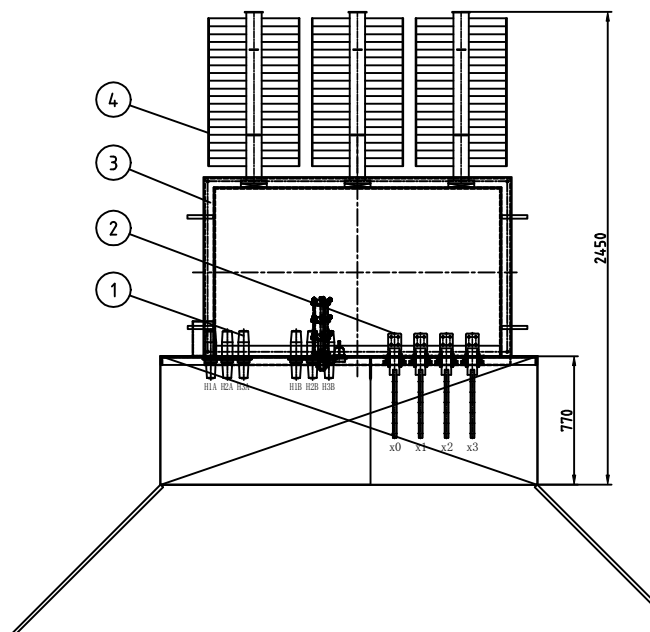
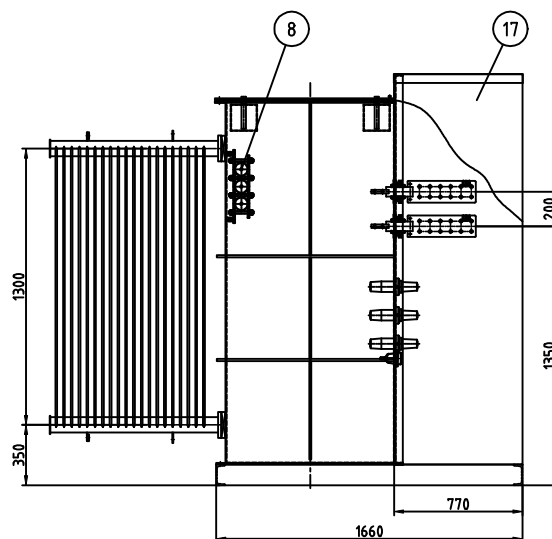
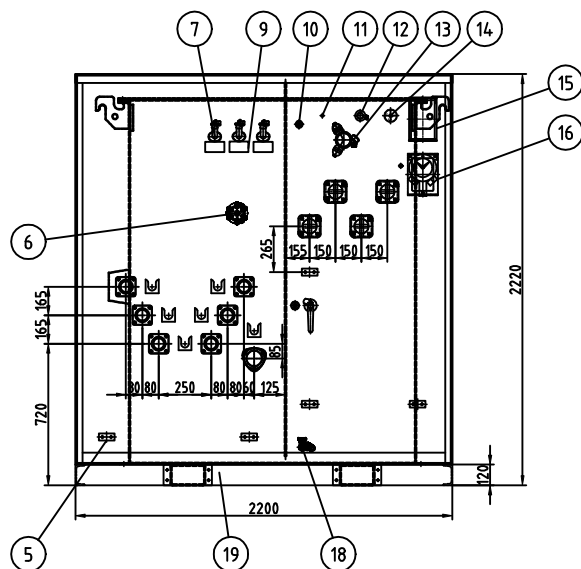


LV BUSHING

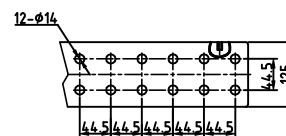

ITEM	WEIGHT(lb)
Body weight	5555
Tank & accessories	4580
Total oil weight	3710
Total weight	13840

TECHNICAL DATA	
RATING	2500kVA
PRIMARY VOLTAGE	12470Grd Y/7200V
SECONDARY VOLTAGE	480Y/277V
FREQUENCY	60Hz
VECTOR GROUP	YNyn0
WINDING MATERIAL	Aluminum
LOAD LOSS AT RATED VOLTAGE	21200W Tol -10%~+10%
NO LOAD LOSSES	2290W Tol -10%~+10%
IMPEDANCE	5.3-6.3%
ALTITUDE	≤1000m
No. OF TAPPOSITION	5
COLOR	Munsell No.7.0 GY3.29/1.5G
CORE FORM	Three-phase Three column

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	600 A 15 kV Class BOL-T deadbreak connecto, Cooper	6
2	LV bushing (1.0KV 4000A)	4
3	Tank and cover assembly	1
4	Radiators	3
5	Ground Stainless steel	7
6	Tap changer	1
7	High voltage overload fuse, 125A	3
8	High voltage backup current-limiting fuse, 250A	3
9	Oil collecting box	1
10	Oil fill valve (1 inch)	1
11	Vent valve	1
12	Pressure relief device (YZF9-35/25KJ)	1
13	Oil-level indicator	1
14	Vacuum manometer (YZ-70)	1
15	Name plate	2
16	Oil thermometer (BWY-803A)	1
17	Front compartment	1
18	Oil drain valve (1 inch)	1
19	base	1

TYPE ZGSL-H-2500/12.47/0.48					DWG. NAME General Assembly Drawing				
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1 25	2023.10.12	
					REF. DWG. NO.				REV. NO.
					DWG. NO.	1RE. 710. 3474. 1			