




CHANGE

2023年9月19日晚收到图纸，
2023年9月20日确认图纸！

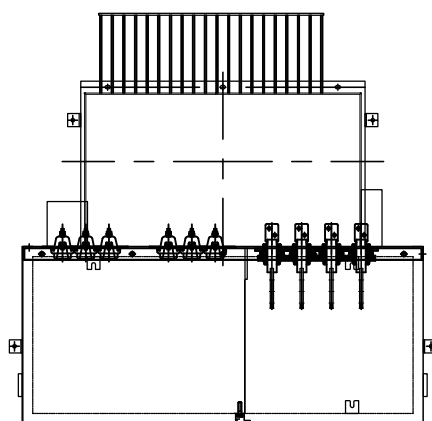

2023年9月20日确认图纸！

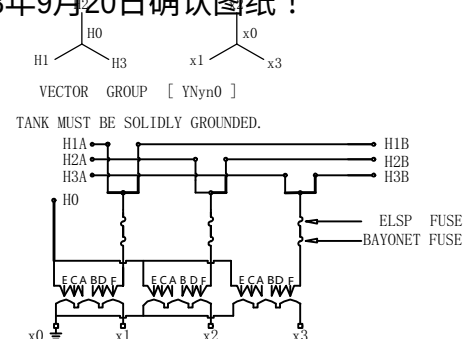

Rating	kVA	500
Phase		3
Frequency	Hz	60
H.V.	V	12470Y/7200
L.V.	V	480Y/277
Vector Group		YNyn0
Core Limbs		★ 3 legged core
Material Of Winding		aluminium
No Load Loss	W	600(+10%)
Load Loss	W	5410 (+6%)
Impedance	%	5.0 (±7.5%)
Altitude		<1000m
Insulating Oil		biodegradable oil (FR3)

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	Hv bushing (TGZ-15/200)	7
2	Tap changer (WSL 63/20-6×5	1
3	Bayonet fuse (4000358C10M)	3
4	Oil thermometer (BWS-70)	1
5	Vacuum manometer (YZ-70)	1
6	Pocket	1
7	Oil-level indicator (UHZ-01)	1
8	Hand valve (YSF)	1
9	Lv bushing (1.0KV 1600A)	4
10	Nameplate	1
11	Ground terminal	3
12	2-hole horiz nema grd pad	5
13	Drain valve	1
14	Elsp fuse (CBUC15100C100)	3
15	Lifting lug	4
16	Connected steel-plate	4
17		
18		

TYPE ZGSL-500/12.47/0.48					DWG. NAME General Assembly Drawing				
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1		
Mike W.	Iris J.	Ella W		Sam S.	PE TRANSFORMER				
1.710.3527.1									
								REV NO	
								△ 0	