
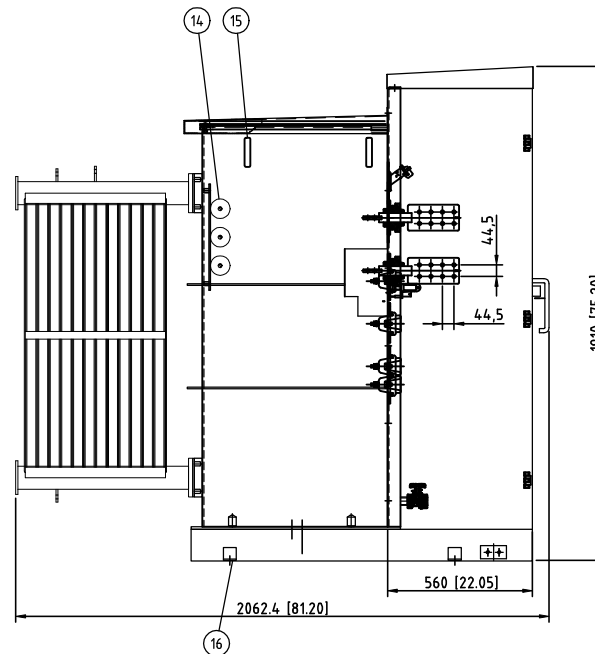
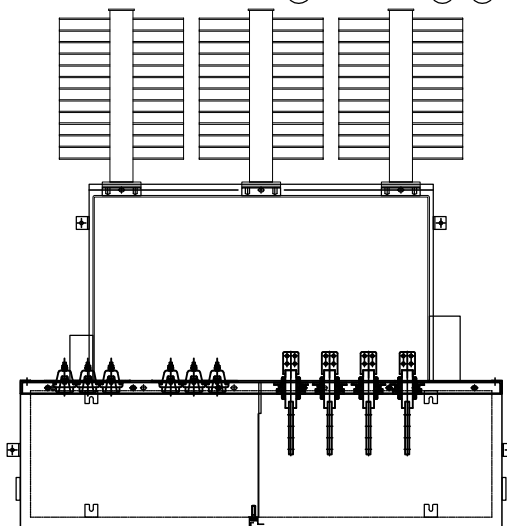



NO.
DWG.

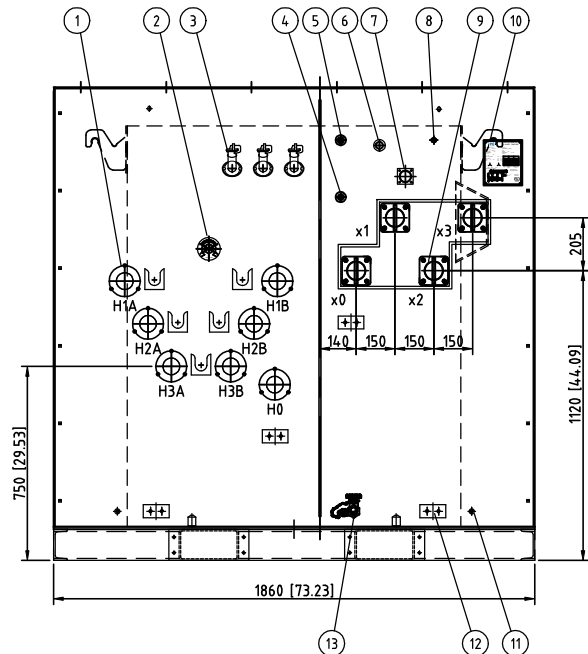

ITEM	WEIGHT(Kg)
Body weight	1540
Tank & accessories	1550
Total oil weight	970
Total weight	4060

Rating	kVA	1500
Phase		3
Frequency	Hz	60
H.V.	V	12470Y/7200
L.V.	V	480Y/277
Vector Group		YNyn0
Core Limbs		★ 3 legged core
Material of winding		aluminium
No Load Loss	W	1400(+10%)
Load Loss	W	14000(+6%)
Impedance	%	6.3 (±7.5%)
Altitude		<1000m
INSULATING OIL		FR3

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	Hv bushing (TGZ-15/200)	7
2	Tap changer (WSLII3-125/20-6×5)	1
3	Bayonet fuse (4038361C04CB)	3
4	Oil thermometer (BWS-70)	1
5	Vacuum manometer (YZ-70)	1
6	Pocket	1
7	Oil-level indicator (UHZ-01)	1
8	Hand valve (YSF)	1
9	Lv bushing (1.0KV 2500A)	4
10	Nameplate	1
11	Ground terminal	3
12	2-hole horiz nema grd pad	5
13	Drain valve	1
14	Elsf fuse (CBUC15165D100)	3
15	Lifting lug	4
16	Connected steel-plate	4
17		
18		



PL-R-1500-12.47/7200-480/277

DWG. NAME
General Assembly Drawing

CHANGE

DRAWN	CHECKED	CHECKED	APPROVED
Mike W	Iris J.	Ella W	Sam S.

FIRST ANGLE PROJECTION	SCALE	1
------------------------	-------	---

PE.3PD.01500.12470.R.480



REV.
NO.

