


DWG. NO.	1RE.710.3474.1

ITEM	WEIGHT(lb)
Body weight	5555
Tank & accesories	4580
Total oil weight	3710
Total weight	13840

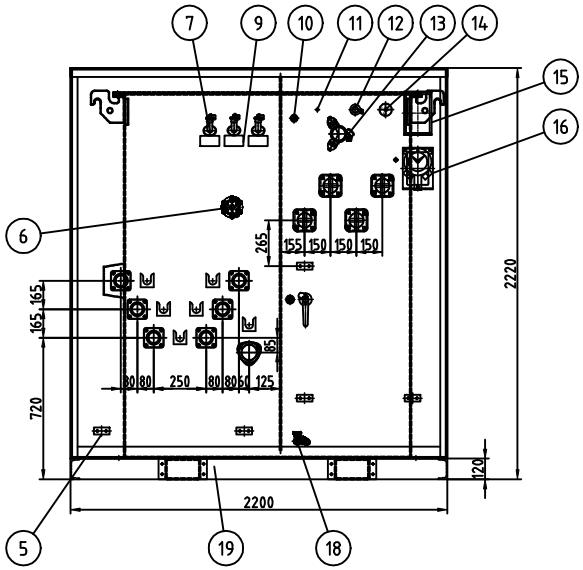


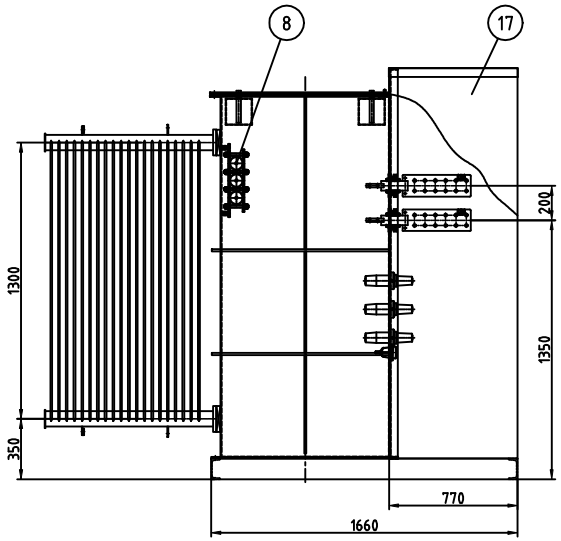


TECHNICAL DATA	
RATING	2500kVA
PRIMARY VOLTAGE	12470Grd Y/7200V
SECONDARY VOLTAGE	480Y/277V
FREQUENCY	60Hz
VECTOR GROUP	YNyn0
WINDING MATERIAL	Aluminum
LOAD LOSS AT RATED VOLTAGF	21200W Tol -10%~+10%
NO LOAD LOSSES	2290W Tol -10%~+10%
IMPEDANCE	5.3-6.3%
ALTITUDE	≤1000m
No. OF TAPPOSITION	5
COLOR	Munsell No.7.0 GY3.29/1.5G
CORE FORM	Three-phase Three column

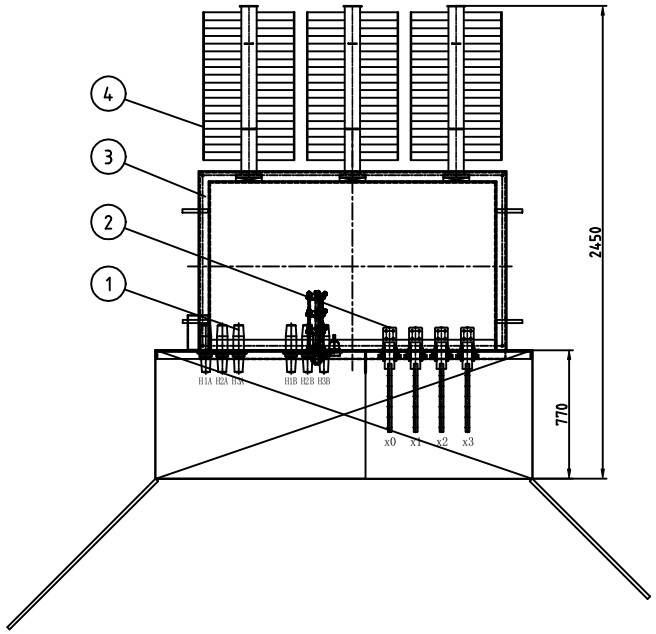

TANK MUST BE SOLIDLY GROUNDED.

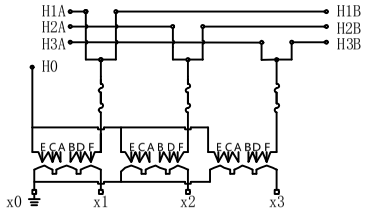

LV BUSHING



ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	600 A 15 kV Class BOL-T deadbreak connecto, Cooper	6
2	LV bushing (1.0KV 4000A)	4
3	Tank and cover assembly	1
4	Radiators	3
5	Ground Stainless steel	7
6	Tap changer	1
7	High voltage overload fuse, 125A	3
8	High voltage backup current-limiting fuse, 250A	3
9	Oil collecting box	1
10	Oil fill valve (1 inch)	1
11	Vent valve	1
12	Pressure relief device（YZF9-35/25KJ）	1
13	Oil-level indicator	1
14	Vacuum manometer（YZ-70）	1
15	Name plate	2
16	Oil thermometer（BWY-803A ）	1
17	Front compartment	1
18	Oil drain valve（1 inch）	1
19	base	1

TYPE	ZGSL-H-2500/12.47/0.48	DWG. NAME	General Assembly Drawing
DRAWN / CHECKED / CHECKED / APPROVED		FIRST ANGLE PROJECTION	SCALE 1/25 2023.10.12
REF. DWG. NO.		REV. NO.	
Jiangsu Ryan Electrical Stock Co.,Ltd	DWG. NO. 1RE.710.3474.1		0

CHANGE