
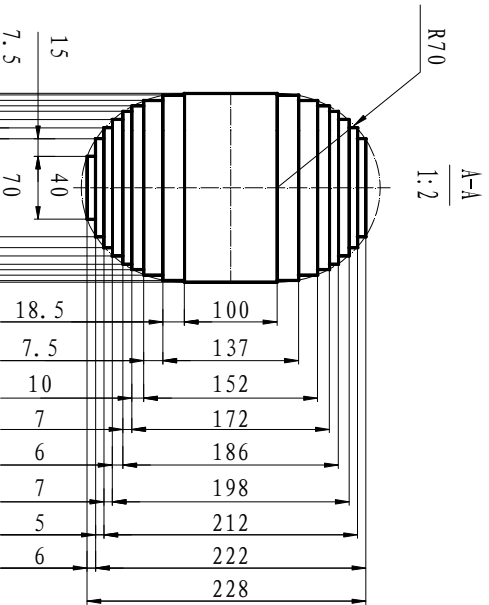



8JZ. 641. 2449. 1

技术条件

4. 厂家可以根据实际情况采用五级接缝

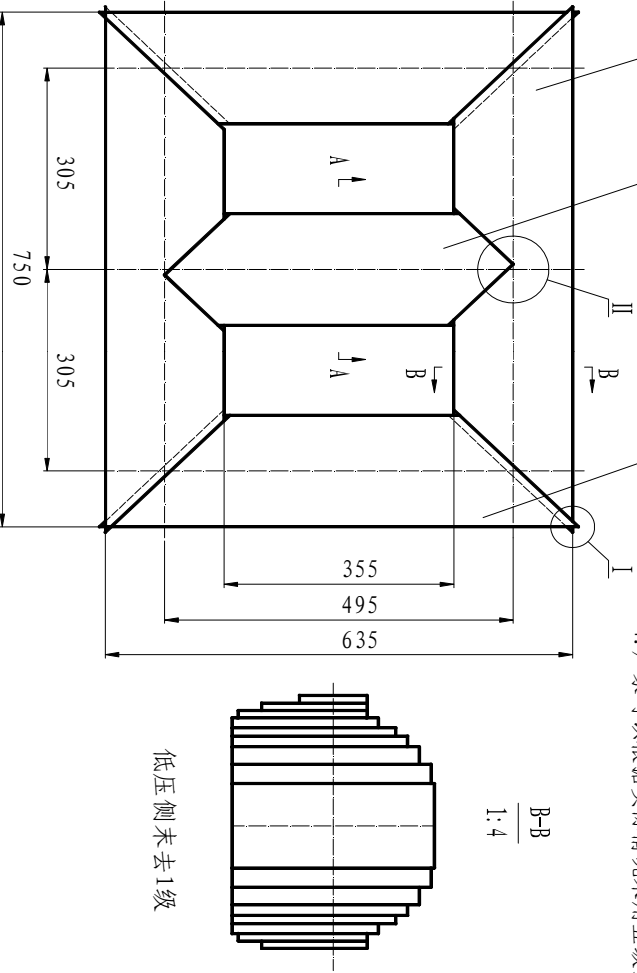

II 部放大





注意:

1. 铁心截面积: 273.69CM²
2. 频率: 60HZ; 接法: y接.
3. 低压电压: 480V, 匝数: 24匝.

[illegible]

--	--	--	--	--	--	--	--	--	--

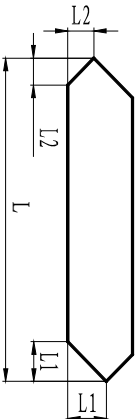
27	9	495			40	2.0	9	
26	8	465			70	3.3	14	
25	7	450			85	4.7	20	
24	6	455			100	4.0	17	
23	5	465			110	4.7	20	
22	4	475			120	6.7	29	
21	3	485			130	5.0	22	
20	2	490			135	12.3	54	
19	1	495			140	33.3	145	
18	9	495	25	15	40	4.0	17	
17	8	465	40	30	70	6.7	29	
16	7	450	47.5	37.5	85	9.3	41	
15	6	455	55	45	100	8.0	35	
14	5	465	60	50	110	9.3	41	
13	4	475	65	55	120	13.3	58	
12	3	485	70	60	130	10.0	43	
11	2	490	72.5	62.5	135	24.7	107	
10	1	495	75	65	140	66.7	290	
中 柱 片 二								
中 柱 片 一								

底图总号										ZGS-H-500/12.47
------	--	--	--	--	--	--	--	--	--	---



1.64472.010.Z15

技术条件

项4尺寸

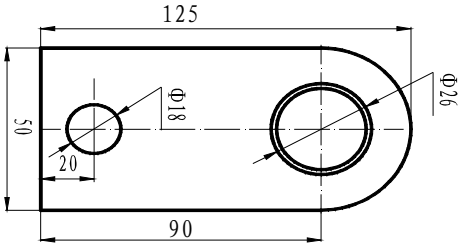


- 1. 焊接牢固,无虚焊.
- 2. 焊接后校正并打磨平整.
- 3. 项4与槽钢必须满焊.保证起吊强度.

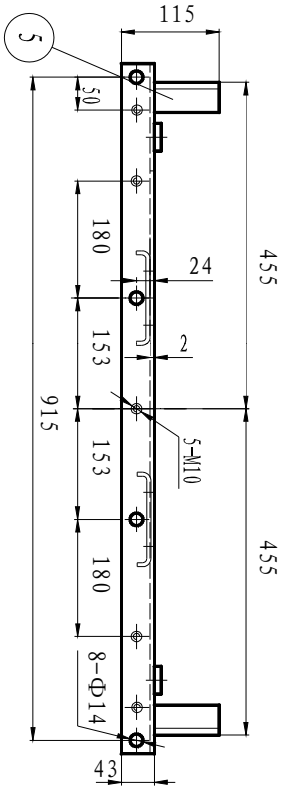
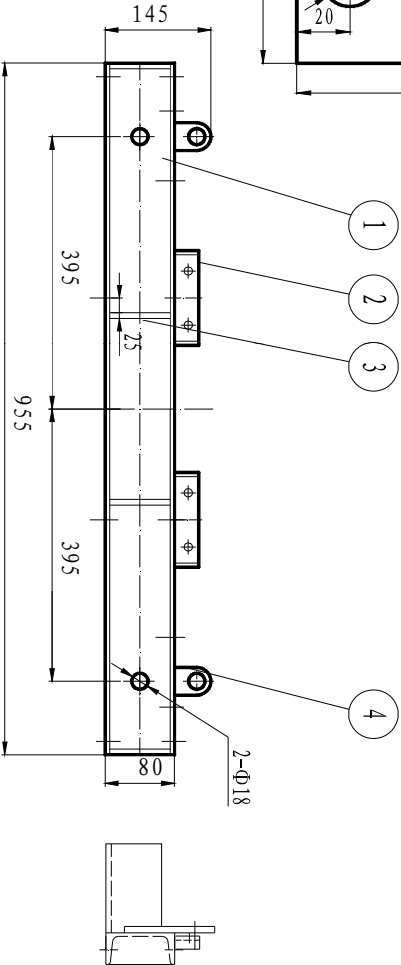


描 图	5		角钢 L=72	2	50×50×6 角钢Q236A	0.4	0.8			
	4		吊 铁	2	10.0钢板Q235A	0.2	0.4	见本图		
描 校	3		8JZ.130.002		加强铁 68×40×6.0	4	6.0 钢板Q235A	0.3	1.1	
	2		8JZ.142.001		弯板	2	4.0 钢板Q235A	0.2	0.3	
	1				夹件槽钢	1	80×43×5.3 槽钢Q235A	7.7	7.7	
旧底图总号	序 号	代 号	名 称	数 量	材 料	单件重量	总计重量	备 注		
底图总号										
签 字	标记	处数	更改文件号	签 字	日期	ZGS-H-500/12.47 5JZ.070.2449.1 高压上夹件				
	设计		标准							
	校 对		审 定							
日 期	审 核		批 准							
工 艺			日期	2024/6/24						
节奏变压器（江苏）有限公司										

项4尺寸

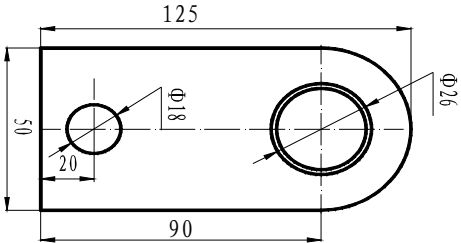

- 1. 焊接牢固,无虚焊.
- 2. 焊接后校正并打磨平整.
- 3. 项4与槽钢必须满焊.保证起吊强度.

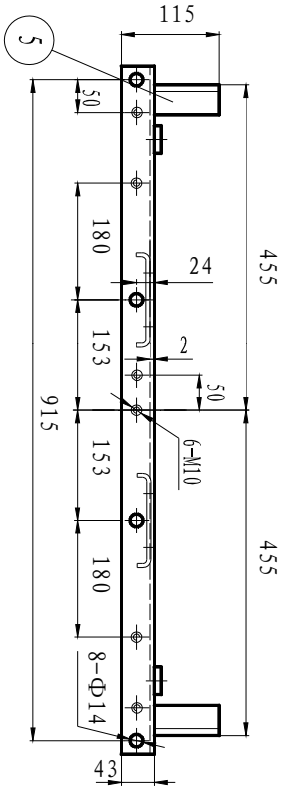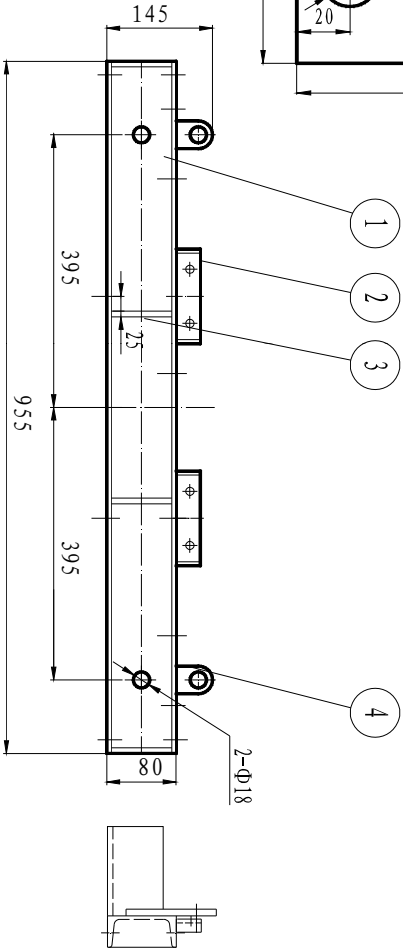


描 图	5		角钢 L=72	2	50 × 50 × 6 角钢Q236A	0.4	0.8	
	4		吊 铁	2	10.0钢板Q235A	0.2	0.4	见本图
描 校	3	8JZ.130.002	加强铁 68 × 40 × 6.0	4	6.0 钢板Q235A	0.3	1.1	
	2	8JZ.142.001	弯板	2	4.0 钢板Q235A	0.2	0.3	
	1		夹件槽钢	1	80 × 43 × 5.3 槽钢Q235A	7.7	7.7	
旧底图总号	序 号	代 号	名 称	数 量	材 料	单件重量	总计重量	备 注
底图总号								

5JZ.070.2449.3


技术条件

1. 焊接牢固, 无虚焊。
2. 焊接后校直并打磨平整。
3. 保证接地螺母端面接触良好。

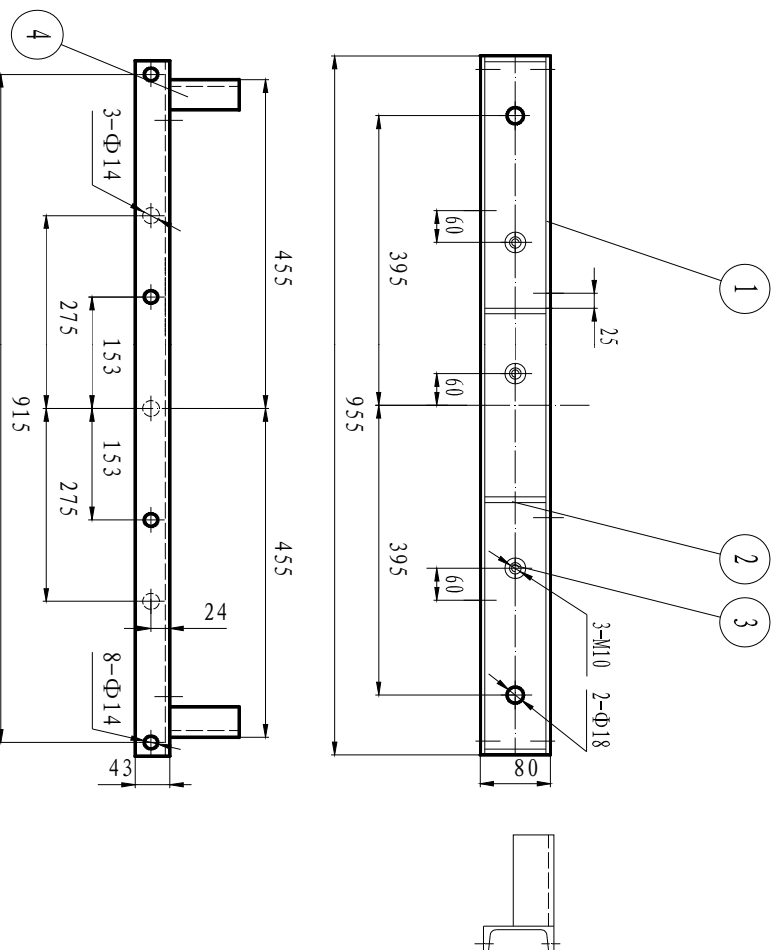



借(通)用件登记										
描 图										
	4		角钢 L=72		2	50×50×6 角钢Q236A				
描 校	3		接地螺母 M10×25		3				取消	
	2	8JZ.130.002	加强铁 68×40×6.0		4	6.0 钢板Q235A		0.3	1.1	
	1		下夹件		1	80×43×5.3 槽钢Q235A		7.7	7.7	
旧底图总号	序 号	代 号	名 称		数 量	材 料		单件重量	总计重量	
底图总号										
签 字	标 记	处数	更改文件号	签 字	日期	ZGS-H-500/12.47 下夹件				
	设 计		标 准 化			5JZ.070.2449.3				
	校 对		审 定							
日 期	审 核		批 准							
工 艺			日 期	2024/6/24						
						图样标记		数 量	重 量	比 例
						S		2	17.5896	
						共 1 页		第 1 页		
节奏变压器（江苏）有限公司										

1. 纸板去毛刺,粘接牢固.

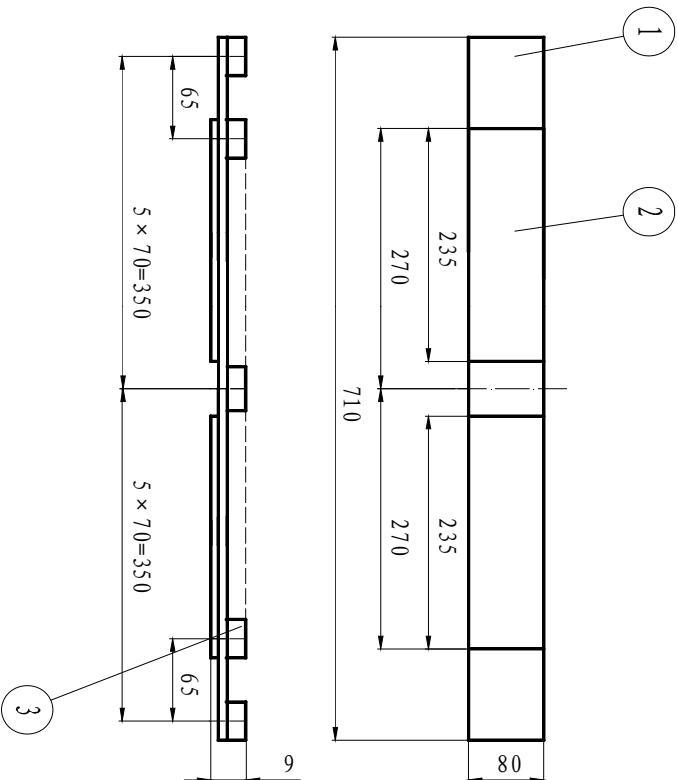


描 校	3	8JZ. 860. 001	纸板 6 × 80 × 40	11	纸板100/01	0. 0	0. 2	纸板粘接	
	2	8JZ. 151. 001	纸板 1 × 80 × 235	2	1. 0纸板100/01	0. 0	0. 0		
	1	8JZ. 151. 001	纸板 2 × 80 × 710	1	2. 0纸板100/00	0. 1	0. 1		
旧底图总号	序 号	代 号	名 称	数 量	材 料	单件重量	总计重量	备 注	
底图总号			ZGS-H-500/12. 47		5JZ. 750. 2449. 2				
签 字	标 记	处 数	更改文件号	签 字	日 期	夹件绝缘			
	设 计		标 准 化						
	校 对		审 定						
日 期	审 核		批 准						
	工 艺		日 期	2024/6/24					
						节奏变压器（江苏）有限公司			

- 1.焊接牢固,无虚焊.
- 2.焊接后校直并打磨平整.

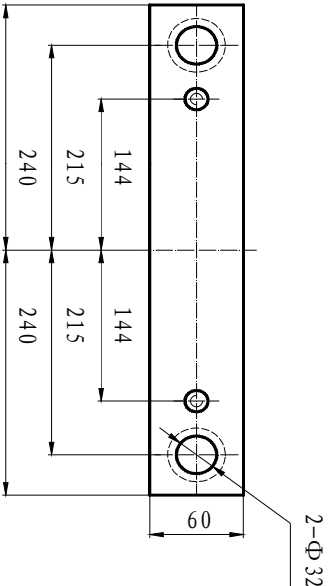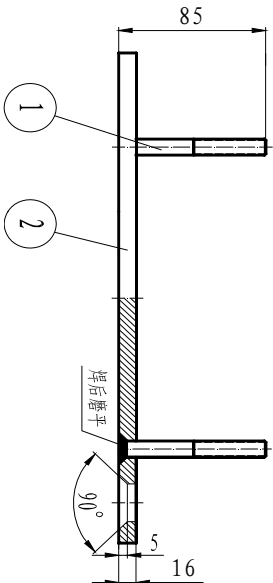

借(通)用件登记										
描 图										
描 校										
	2		扁钢 L=480		1	16×60 扁钢Q235A		3.6	3.6	
旧底图总号	1		螺杆 M12×80/50		2					
	序 号	代 号		名 称	数 量	材 料		单件重量	总计重量	备 注
底图总号										
签 字	标 记	处 数	更改文件号	签 字	日 期	ZGS-H-500/12.47 垫 脚				
	设计									
	校对									
	审核									
日 期			审 定			5JZ. 022. 2449. 1				
			批 准							
工 艺			日 期							
						节奏变压器(江苏)有限公司				

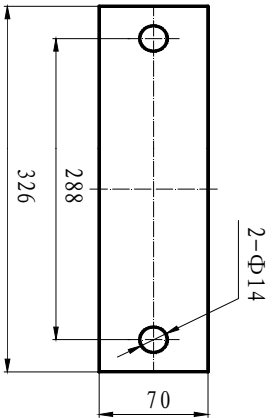


底图总号																								
签 字					标记	处数	更改文件号	签 字	日期	ZGS-H-500/12.47 垫脚绝缘														
					设计					8JZ. 786. 2449														
					校对																			
日 期					审 核		审 批	定 准		3. 0纸板100/00														
					工 艺		日 期																	
										节奏变压器（江苏）有限公司														
										共 1 页 第 1 页														
										图样标记 数 量 重 量 比 例														
					S 3 0.2																			


8JZ. 193. 2449

技术条件

1. 倒棱角, 去毛刺.

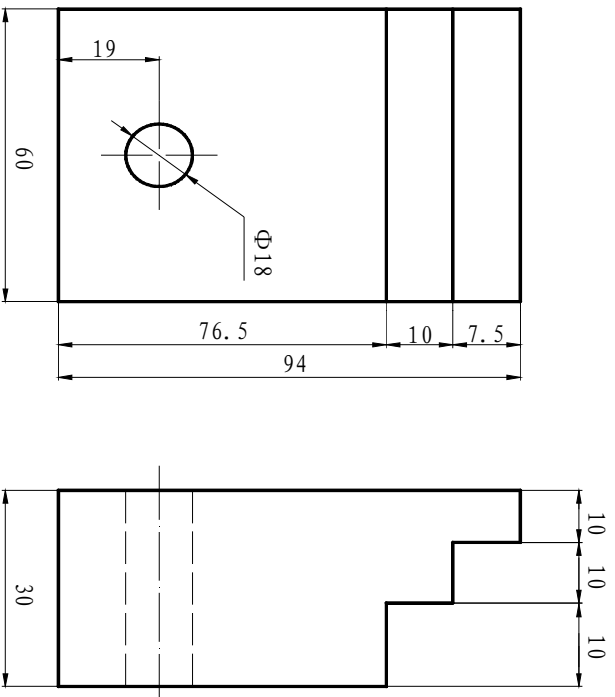[illegible]

	5JZ. 640. 2449
--	----------------

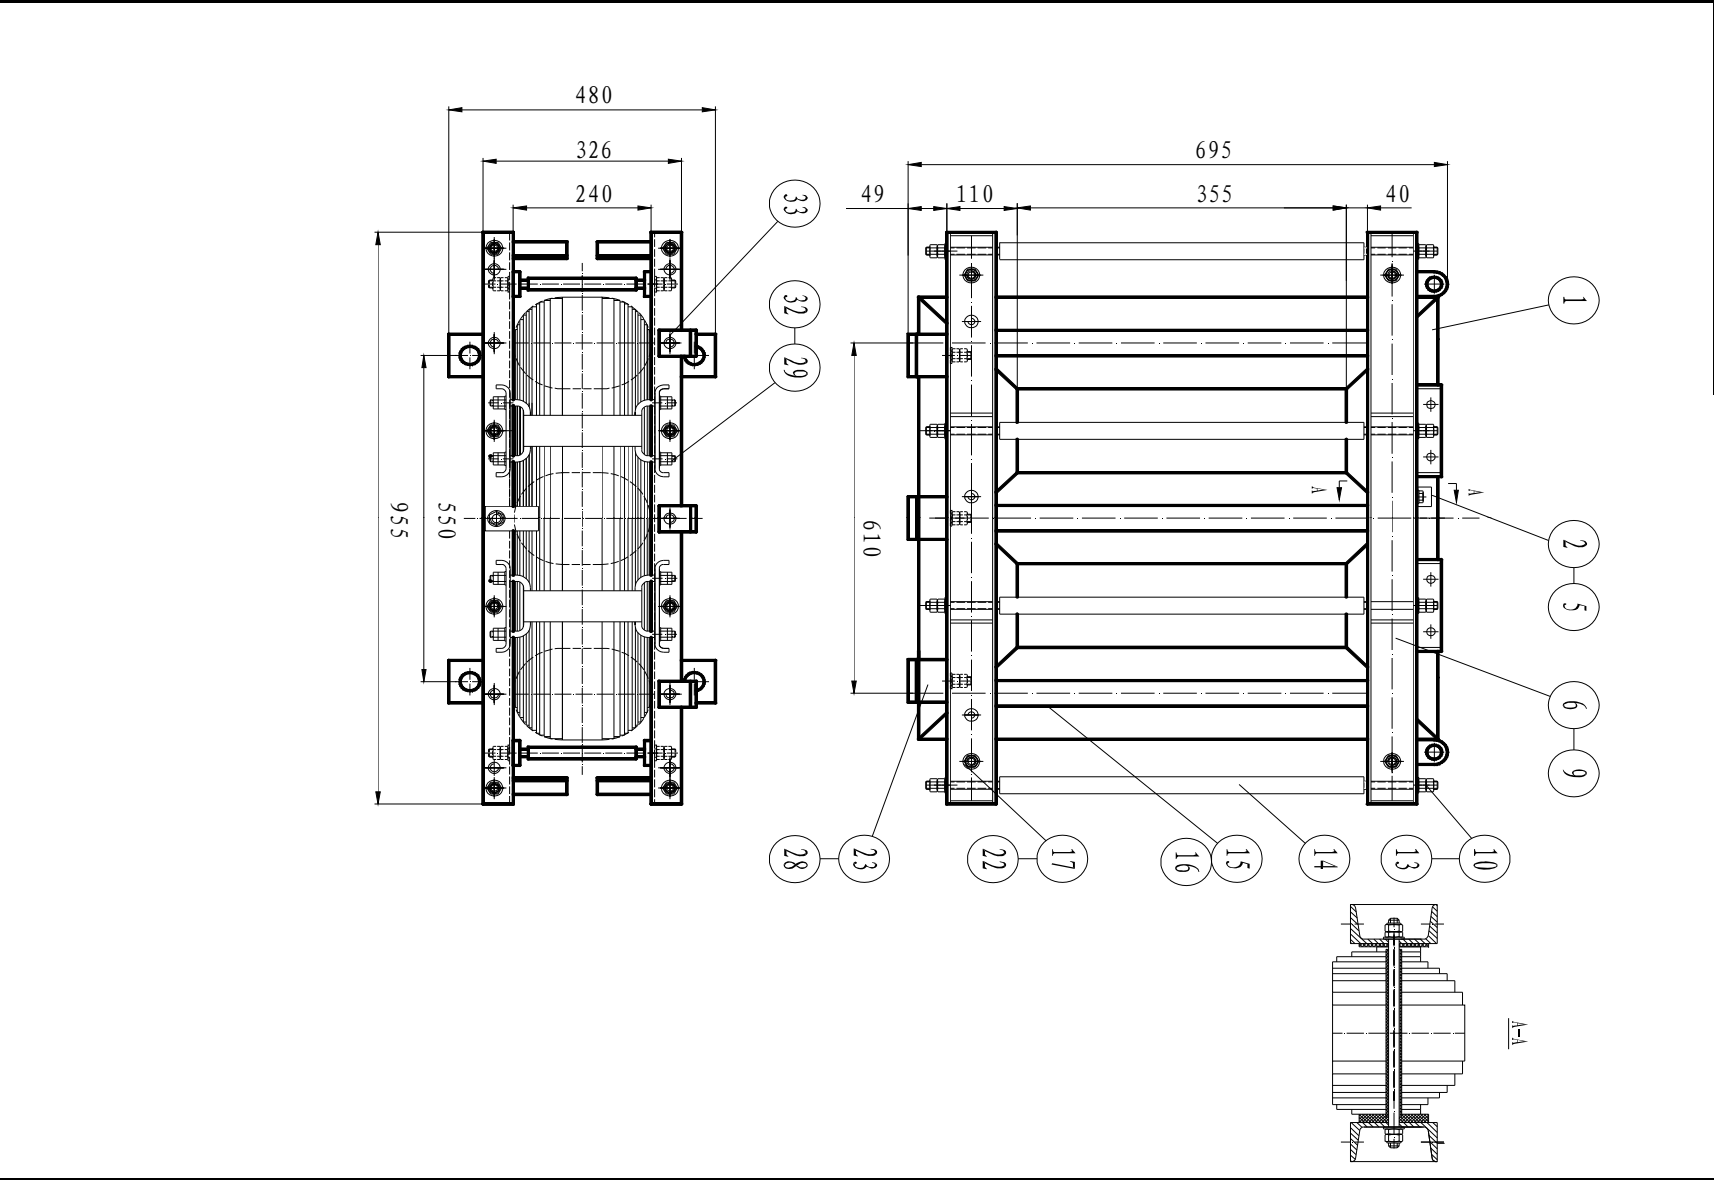

ZGS-H-500/12.47									
铁心装配									
空载损耗: ≤ 645W									
5JZ. 640. 2449									
图样标记		数量		重量		比例			
S				592.033					
共 2 页				第 1 页					
节奏变压器（江苏）有限公司									

33	8LD.100.001.1	固定板	3				通用件	
32	GB/T97.1-2002	垫圈 10	8				发黑	
31	GB/T6172.1-2000	薄螺母 M10	8				发黑	
30	8JZ.151.002	绝缘板 L=220	2	1.0纸板100/00				
29	5JZ.137.001.1	拉带 L=190	2					
28	GB/T6172.1-2000	薄螺母 M12	6				发黑	
27	GB/T6170-2000	螺母 M12	6				发黑	
26	GB/T853-1988	斜垫圈 12	6				发黑	
25	8JZ.193.2449	垫脚垫块	1	层压木		1.2		
24	8JZ.786.2449	垫脚绝缘	1			0.2		
23	5JZ.022.2449.1-2	垫脚	各1			9.5		
22		绝缘管 L=220	8	Φ18×2 酚醛纸管				
21	GB/T6172.1-2000	薄螺母 M16	8				发黑	
20	GB/T97.1-2002	垫圈 16	8				发黑	
19	GB/T6170-2000	螺母 M16	8				发黑	
18	8JZ.931.001.1	螺杆 M16×315/50	4		0.27	1.1	发黑	
17	5JZ.070.2449.3	下夹件	1			17.6		
16	8JZ.151.001	纸板 1.0×65×585	3	1.0纸板100/00	0.03	0.1		
15	8JZ.151.001	纸板 1.0×35×585	3	1.0纸板100/00	0.09	0.3		
14		绝缘管 L=335	8	Φ14×2 酚醛纸管				
13	GB/T6172.1-2000	薄螺母 M12	16				发黑	
12	GB/T97.1-2002	垫圈 12	16				发黑	
11	GB/T6170-2000	螺母 M12	16				发黑	
10	8JZ.931.001.1	螺杆 M12×660/50	8		1.03	8.2	发黑	
9	5JZ.750.2449.2	夹件绝缘	1			1.4	低压侧	
8	5JZ.750.2449.1	夹件绝缘	1			0.3	高压侧	
借(通)用件登记	7 5JZ.070.2449.2	低压上夹件	1			9.1		
	6 5JZ.070.2449.1	高压上夹件	1			9.5		
描图	5 GB/T97.1-2002	垫圈	1				发黑	
	4 GB/T93-1987	弹簧垫圈 10	1				发黑	
描校	3 GB/T5783-2000	螺栓 M10×12	1				发黑	
	2 8JZ.570.002	接地片 L=150	1	铜带 0.3/T2M				
	1 8JZ.641.2449.1	铁心	1	硅钢片 B23P095		534		
旧底图总号	序号	代 号	名 称	数 量	材 料	单件重量	总计重量	备 注
底图总号								
签 字	标记	处数	更改文件号	签 字	日期	ZGS-H-500/12.47 铁心装配 5JZ.640.2449.MX		
	设计		标准化			共 2 页		
	校对		审 定					
日 期	审 核		批 准					
	工 艺		日 期	2024/6/24	空载损耗: ≤645W			节奏变压器(江苏)有限公司