
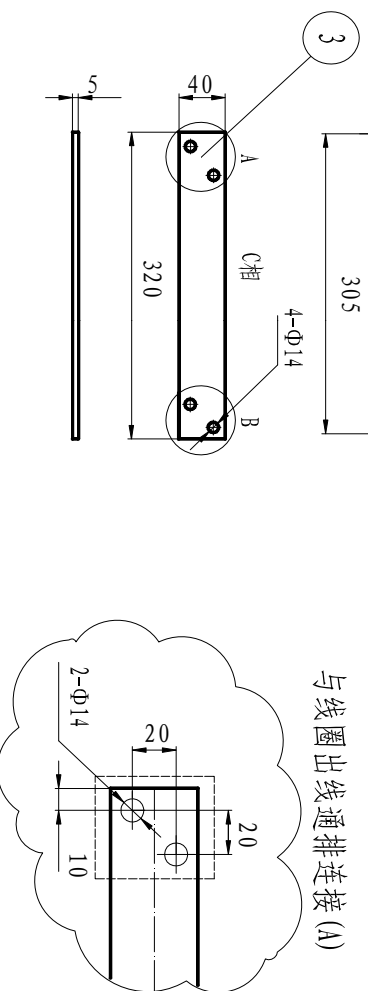
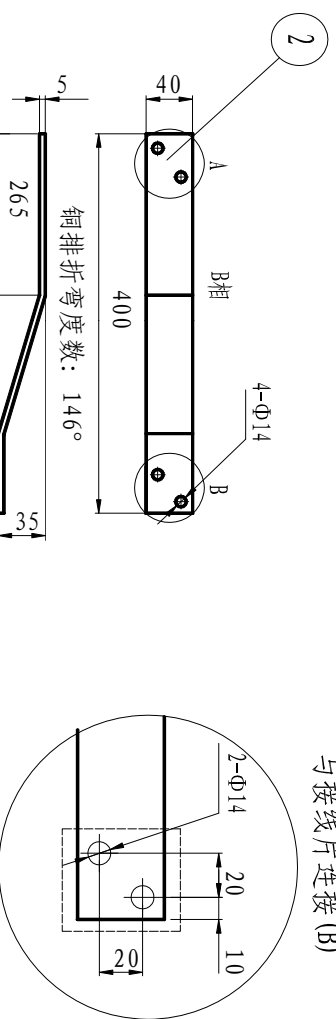


技术条件

1. 铜排折弯尺寸为参考尺寸。
2. 铜排宽度小于50就采用焊接工艺。
3. 采用焊接工艺，铜排就不用打孔。

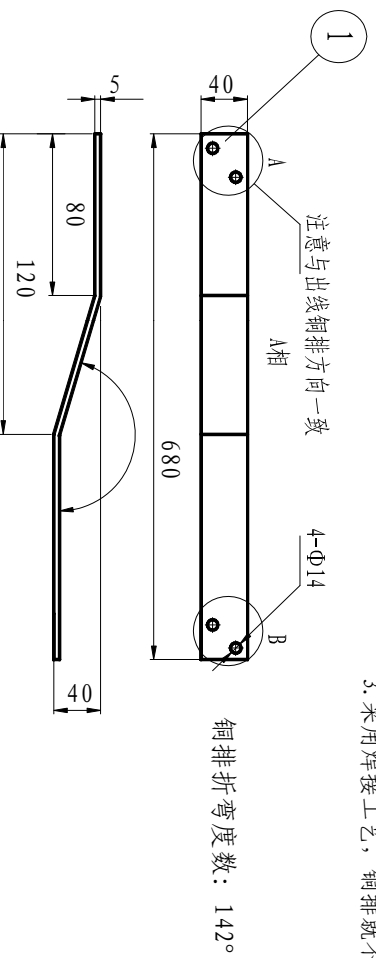


借(通)用件登记																																
描 图																																
描 校																																
3										8JZ. 511. 2449. 6					导电排 L=320					1		5×40 铜排 TMY							0.6			
2										8JZ. 511. 2449. 5					导电排 L=420					1		5×40 铜排 TMY							0.7		折弯如图	
1										8JZ. 511. 2449. 4					导电排 L=693					1		5×40 铜排 TMY							1.2		折弯如图	
旧底图总号										序 号		代 号			名 称			数 量		材 料			单 件 重 量		总 计 重 量		备 注					
底图总号																																
签 字										标记		处数		更改文件号		签 字		日 期		ZGS-H-500/12. 47 导电排												
										设 计				标 准 化				5×40 铜排 TMY														
										校 对				审 定																		
日 期										审 核				批 准																		
工 艺														日 期		1900/1/0																
																				8JZ. 511. 2449. 4-6												
										图样标记		数 量		重 量		比 例																
										S				1套		2.5																
										共 1 页				第 1 页																		
																				节奏变压器 (江苏) 有限公司												

8JZ. 516. 2449. 1-8


技术条件

1. 虚线范围内焊为一体, 表面保持清洁搪锡;

2. 软件连接理论展开长为参考尺寸mm.

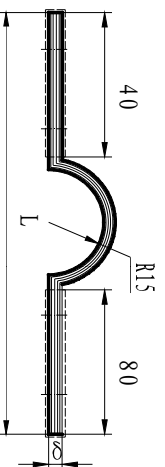

接线片(内)

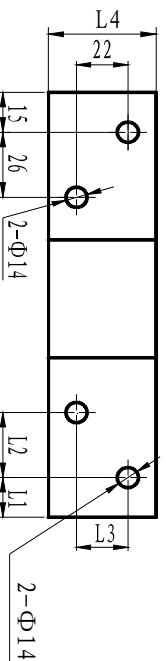

代 号	L	L1	L2	L3	L4	δ	数量	展 长	备 注
8JZ. 516. 2449. 1	150	10	20	20	40	6	1	175	0相
8JZ. 516. 2449. 2	160	10	20	20	40	3	1	180	a相
8JZ. 516. 2449. 3	175	10	20	20	40	3	1	195	b相
8JZ. 516. 2449. 4	205	10	20	20	40	3	1	225	c相

借(通)用件登记					
描图					
描校					
2		8JZ. 516. 2449. 3-4		接线片	
1		81365. 516. 2449. 1-2		接线片	
序号		代号		名称	
				数量	
				材	
				料	
				单件重量	
				总计重量	
				备注	
旧底图总号					
底图总号					
签字					
标记		处数		更改文件号	
设计		审核		签字日期	
ZGS-H-500/12. 47					
软连接					
8JZ. 516. 2449. 1-8					
图样标记		数量		重量	
S		1		1套	
共 1 页		第 1 页			
节奏变压器（江苏）有限公司					