
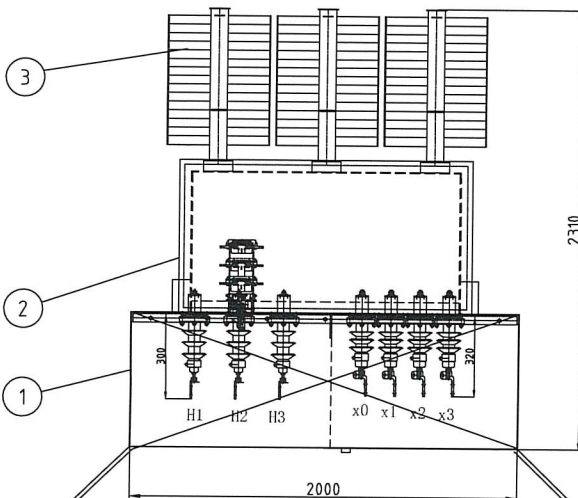


DWG.
NO.

ZGS1500-230727-01

ITEM	WEIGHT(Kg)
Body weight	1800
Tank & accessories	1540
Total oil weight	1260
Total weight	4600

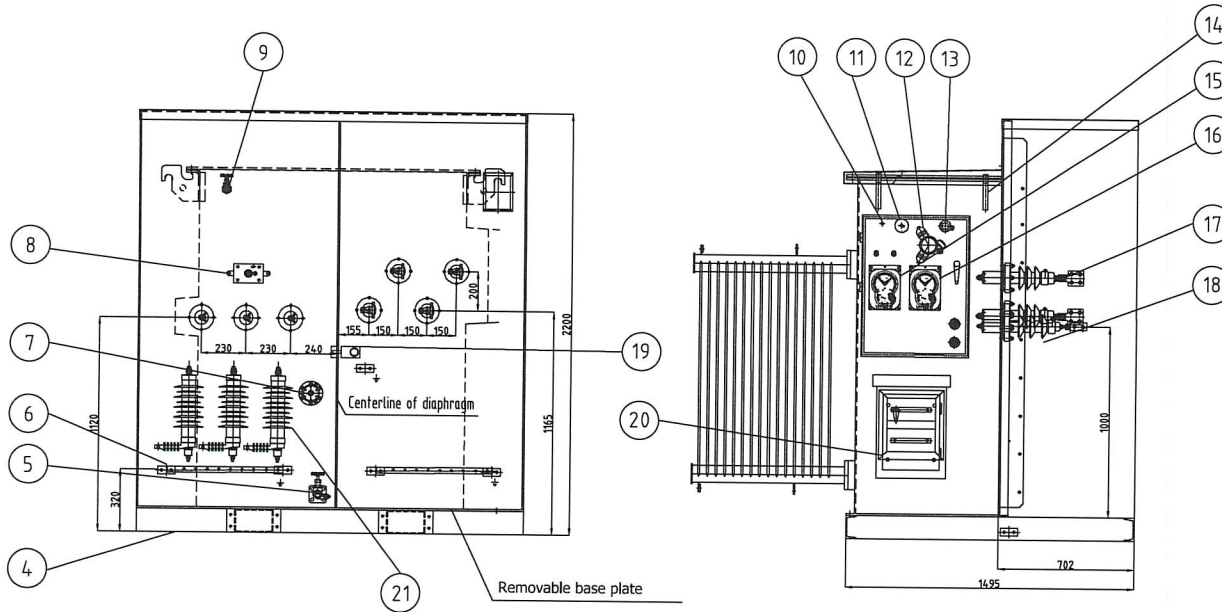

TECHNICAL DATA	
RATING	1500kVA
PRIMARY VOLTAGE	24940V
SECONDARY VOLTAGE	4160Y/2402V
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
WINDING MATERIAL	Aluminum
LOAD LOSS AT RATED VOLTAGE	14500W Tol +5%
NO LOAD LOSSES	2000W Tol +5%
IMPEDANCE	5.75% Tol±10%
ALTITUDE	≤1000m
No. OF TAPPOSITION	5,(±2×2.5%)
COLOR	Musell Green
CORE FORM	Three-phase three column
INSULATING OIL	<2PPM PCB
FLUID	MINERAL OIL

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	Front compartment	1
2	Tank and cover assembly	1
3	Radiators (PC1100-16/520)	3
4	Base	1
5	Oil drain valve	1
6	Ground Stainless steel	7
7	Tap changer	1
8	Load Switch	1
9	OIL FILL VALVE	1
10	Vent valve	1
11	Vacuum manometer (YZ-70)	1
12	Oil-level indicator (YZF-90)	1
13	Pressure relief device (YZF-35/25KJ)	1
14	LIFTING LUGS	4
15	OIL THERMOMETER (BWY-803A)	1
16	Winding thermometer (BWR-04AAW)	1
17	LV Through rod type casing	4
18	HV Through rod type casing	3
19	Type DM Access Interlock	1
20	Terminal box	1
21	Metal Oxide Surge Arrester	3
22		
23		



TYPE
ZGS-Z-1500/24.94/4.16DWG. NAME
General Assembly Drawing

DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1/25	
Mike W	Iris J	Ella W		Som	REF. DWG. NO.			REV. NO.
					DWG. NO.	ZGS1500-230727-01		







TYPE ZGS-Z-1500/24.94/4.16					DWG. NAME Base Structure Drawing			
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1 25	
Mike Wang	Iris Ji	Elln Wei		Sun	REF. DWG. NO.			REV. NO.
					DWG. NO.	ZGS1500-230727-01		

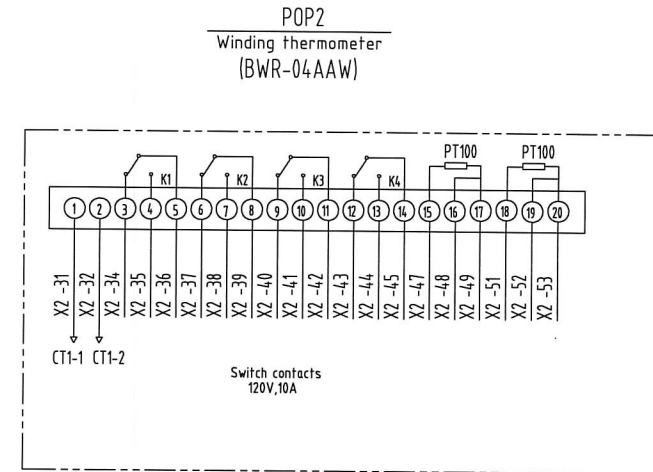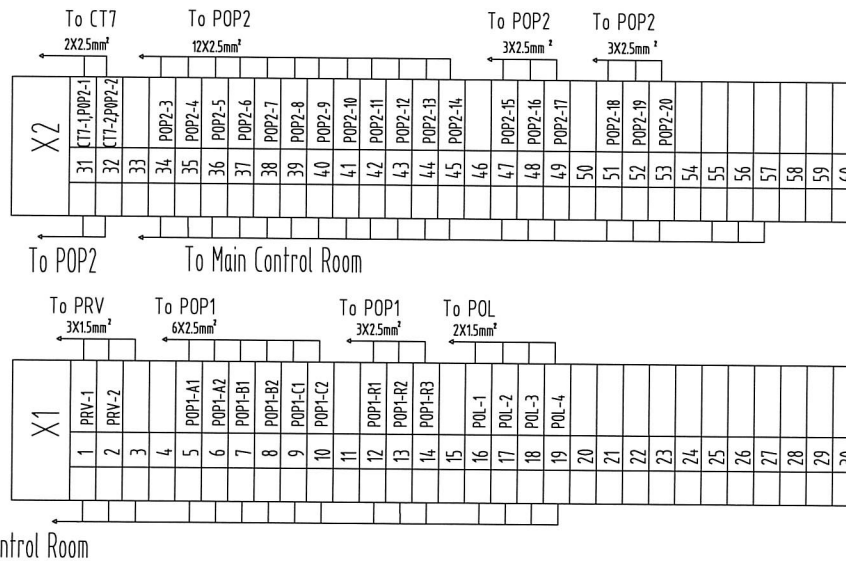


PRV
Pressure relief valve
(YSF9-35/25KJ)




POP1
Temperature controller
(BWY-803A)




POP1
Resistance thermometer
(PT100)



POL
oil level gauge
(YZF-90TH)



CT1
Winding temperature CT
(300/5A 10VA)



TYPE ZGS-Z-1500/24.94/4.16					DWG. NAME Transformer Secondary Diagram		
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	
Mike W	Iris J	Ella W		Sam			REV. NO.
							1

NOTE:

- 1.ALL DIMENSIONS ARE IN MILLIMETERS
- 2.MATERIAL:STAINLESS STEEL
- 3.THICKNESS :1mm
- 4.LETTER COLOR: BLACK




3 ϕ PAD MOUNT
 Δ /Y TRANSFORMER



kVA: 1500
HV: 24940V
HV BIL kV: 150
TYPE II
5.75 % IMP.:@85 $^{\circ}$ c


LV: 4160/2402V
LV BIL kV: 60
CORE & COIL WEIGHT:1800kg
TANK & FIT WEIGHT:1540kg
FLUID:mineral oil
LITERS:1415L,1260kg
TOTAL WEIGHT:4600kg

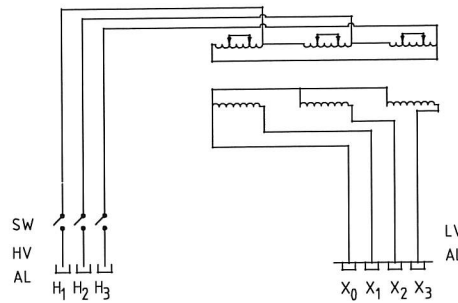

CONTAINS NO DETECTABLE LEVEL OF PCB
(LESS THAN 1 PPM) AT TIME OF MANUFACTURE.

VOLTS POS. AMPS		
26187	1	33.07
25564	2	33.88
24940	3	34.72
24317	4	35.62
23693	5	36.55

MAX. AMPS @ 1500kVA
%IZ@ BASE kVA AND RATED VOLTAGE
CSA C802.1-13 EFFICIENCY COMPLIANT
READ INSTRUCTIONS BEFORE OPERATING.



LIQUID FILLED/LIQUID IMMERSED
DISTRIBUTION TRANSFORMER

BUILT TO C227.4



SER. NO.:

DATE OF MANUFACTURE:



1piece/set

CHANGE

TYPE

ZGS-1500/24.94

DWG. NAME

Name plate

FIRST ANGLE
PROJECTION

SCALE

1
5

DRAWN

CHECKED

CHECKED

APPROVED

Mike W

Iris J

Ella W


Sam



JIEZOU POWER

REV.
NO.



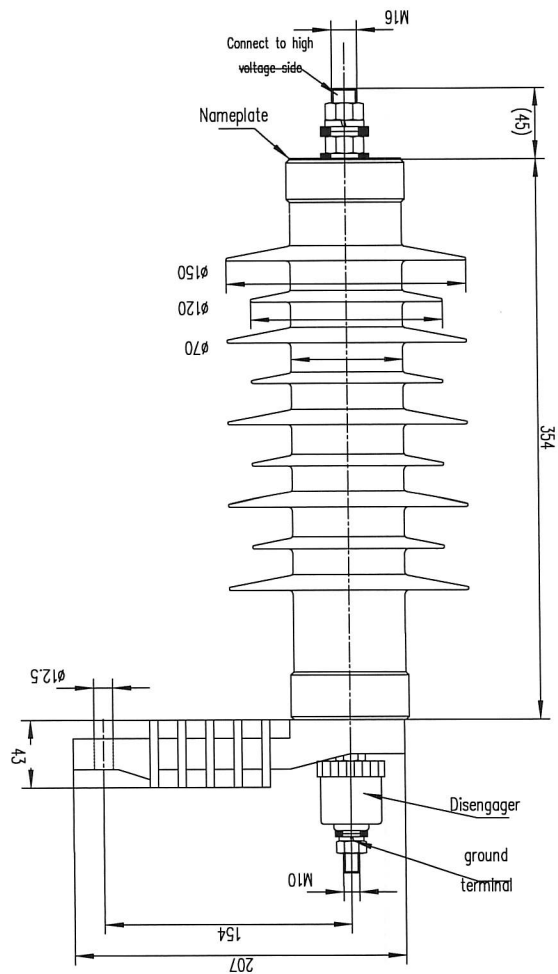

职务 FUNCTION	姓名 NAME	签字 SIGNATURE
审核人 APPROVED BY	张碧辉	
审核人 REVIEWED BY	陈前	
检查人 CHECKED BY	樊雷	
设计人 DESIGNED BY	任重	

HY5WZ-39/98 (400A) metal oxide arrester technical parameters

NO	ITEM	SPC
1	System nominal voltage kV	24.94
2	Surge arrester rated voltagekV (effective value)	39
3	Continuous operating voltage kV (effective value)	31.2
4	DC 1mA reference voltage>kV	56
5	2ms square wave current A (Peak value)	400
6	Steep wave impact residual pressure ≤kV (Peak value)	113
7	Lightning impulse residual voltage ≤kV (peak value)	98
8	Operating shock residual pressure ≤kV (peak value)	83
9	Nominal discharge current kA	5

图名 DRAWING TITLE	
金属氧化锌避雷器 Metal Oxide Surge Arrester	
图样号 PROJECT	(18) 05-01
图号 DRAWING	026
图版本 VERSION	3
专业 DISCIPLINE	
比例 SCALE	
日期 DATE	

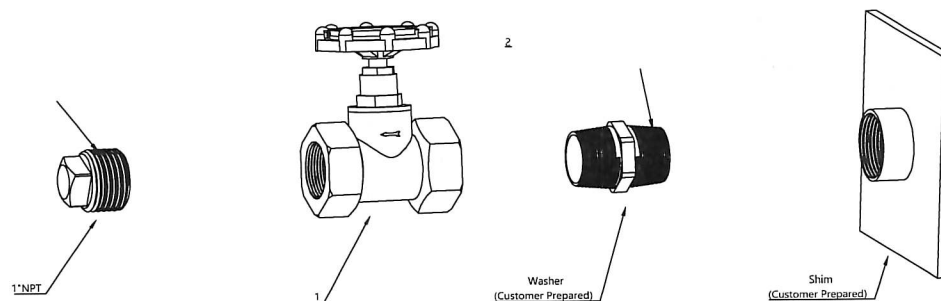


Fig 3: Pipe Plug

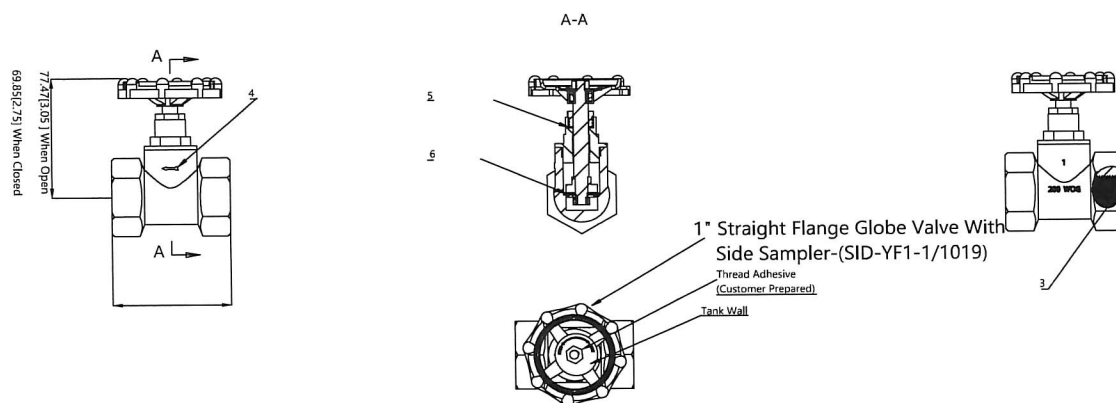


Fig 2: Body

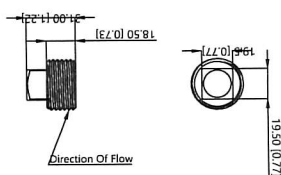


Fig 3: Pipe Plug

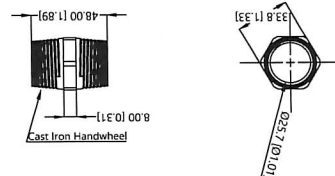


Fig 4: Adapter




Fig 5: 3D View

Parts List				
Item	Description	Material	QTY	Note
1	Pipe Plug	Hpb57-3	1PCS	1" NPT
2	1" Globe Valve	Hpb57-3	1PCS	1" NPT
3	Adapter	Hpb57-3	1PCS	1" NPT
Technical Data				
Maximum Pressure		200LBS(Water-Oil-Gas)		
Installation Torque		61N*m-74.5N*m		



1" Globe Valve With Pipe Plug & Nipple-(SID-YF1-1/1004)			
Scale 1:1	1:1	Unit of Length	mm[inch]
Version A	A	Drawing No	SF056AA00
Designed			
Checked			
Approved			