

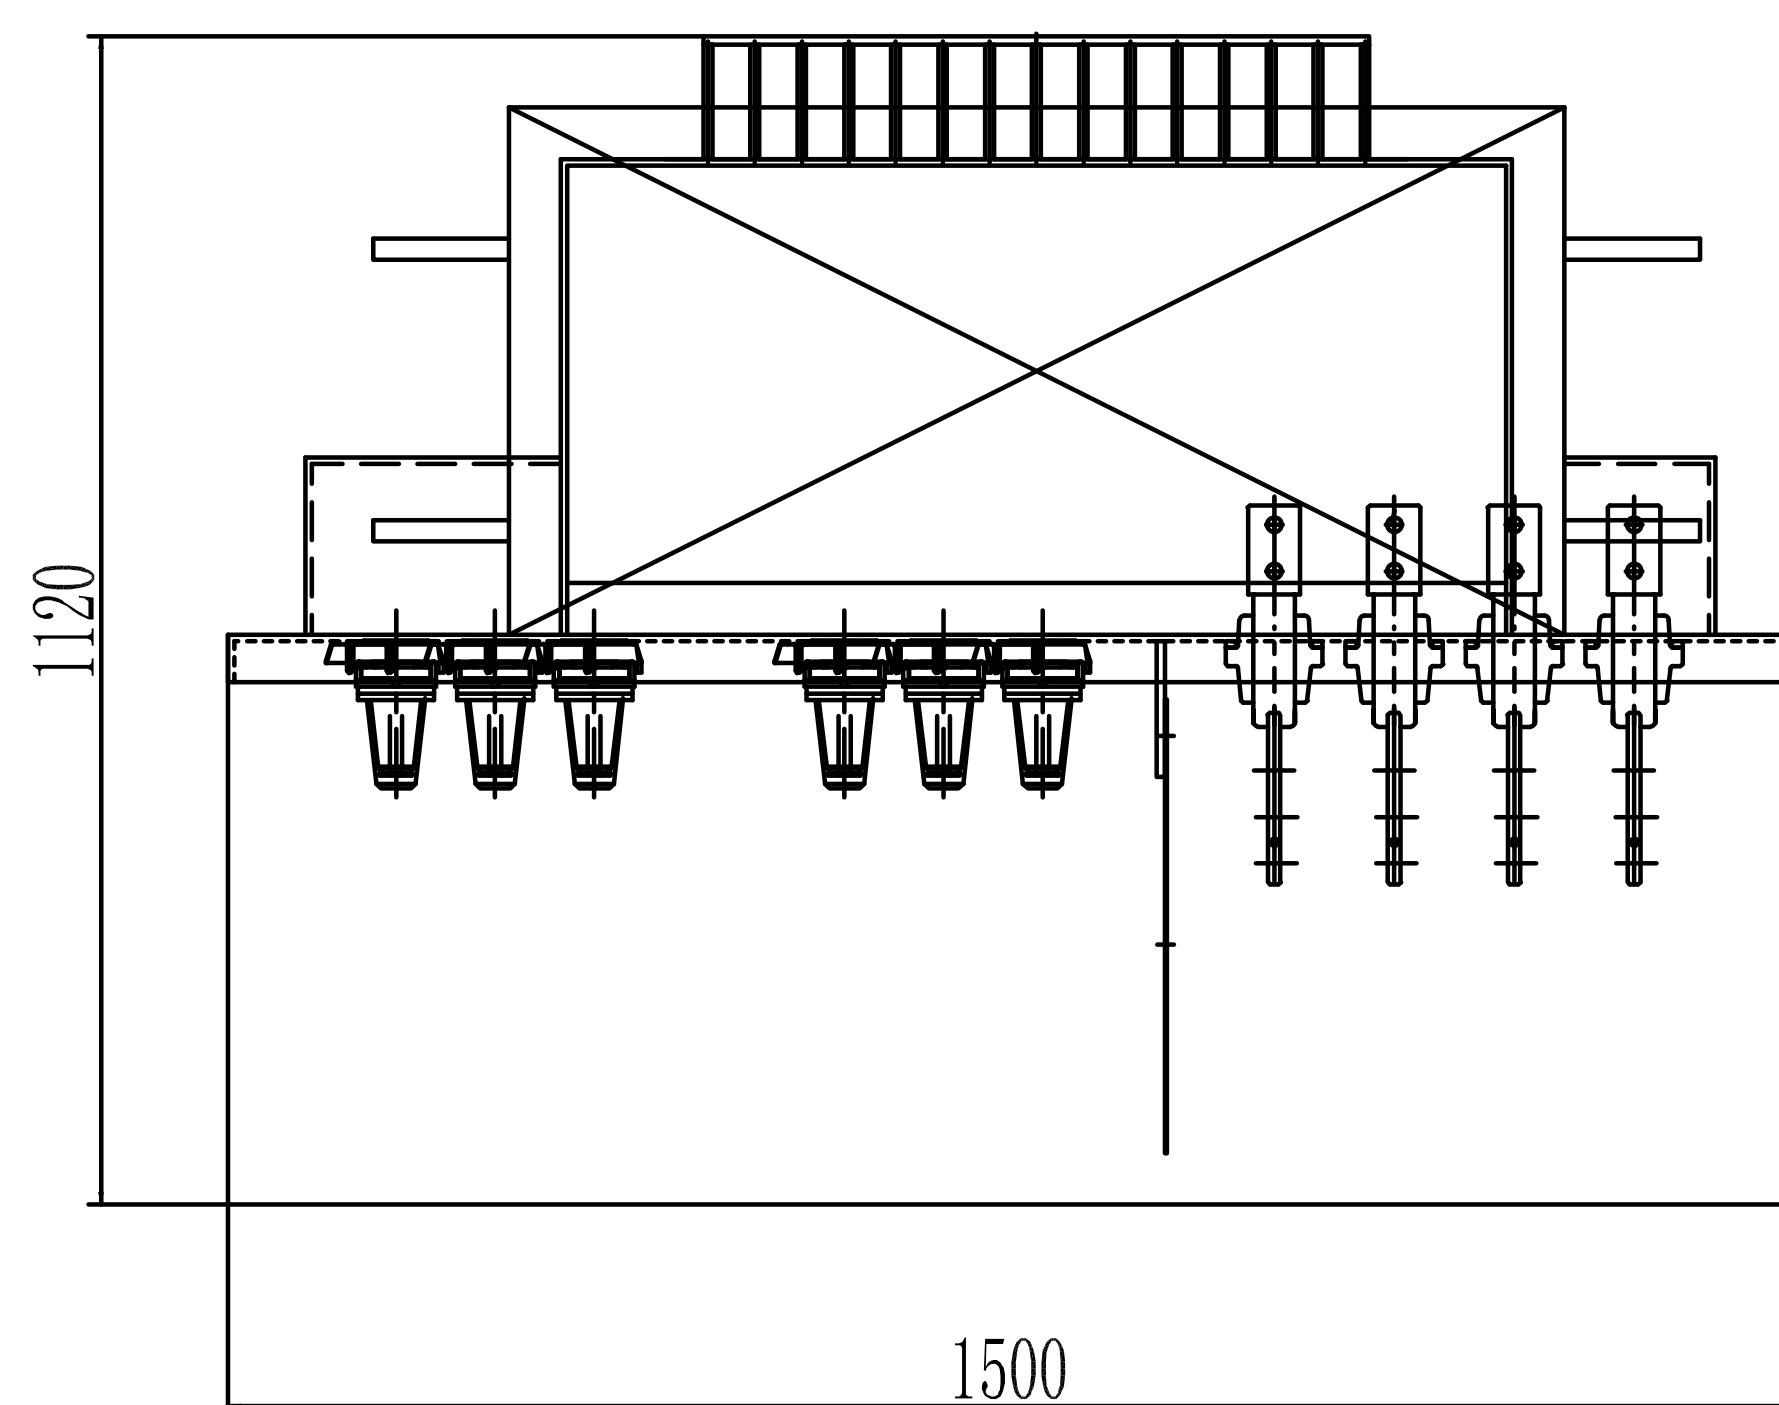
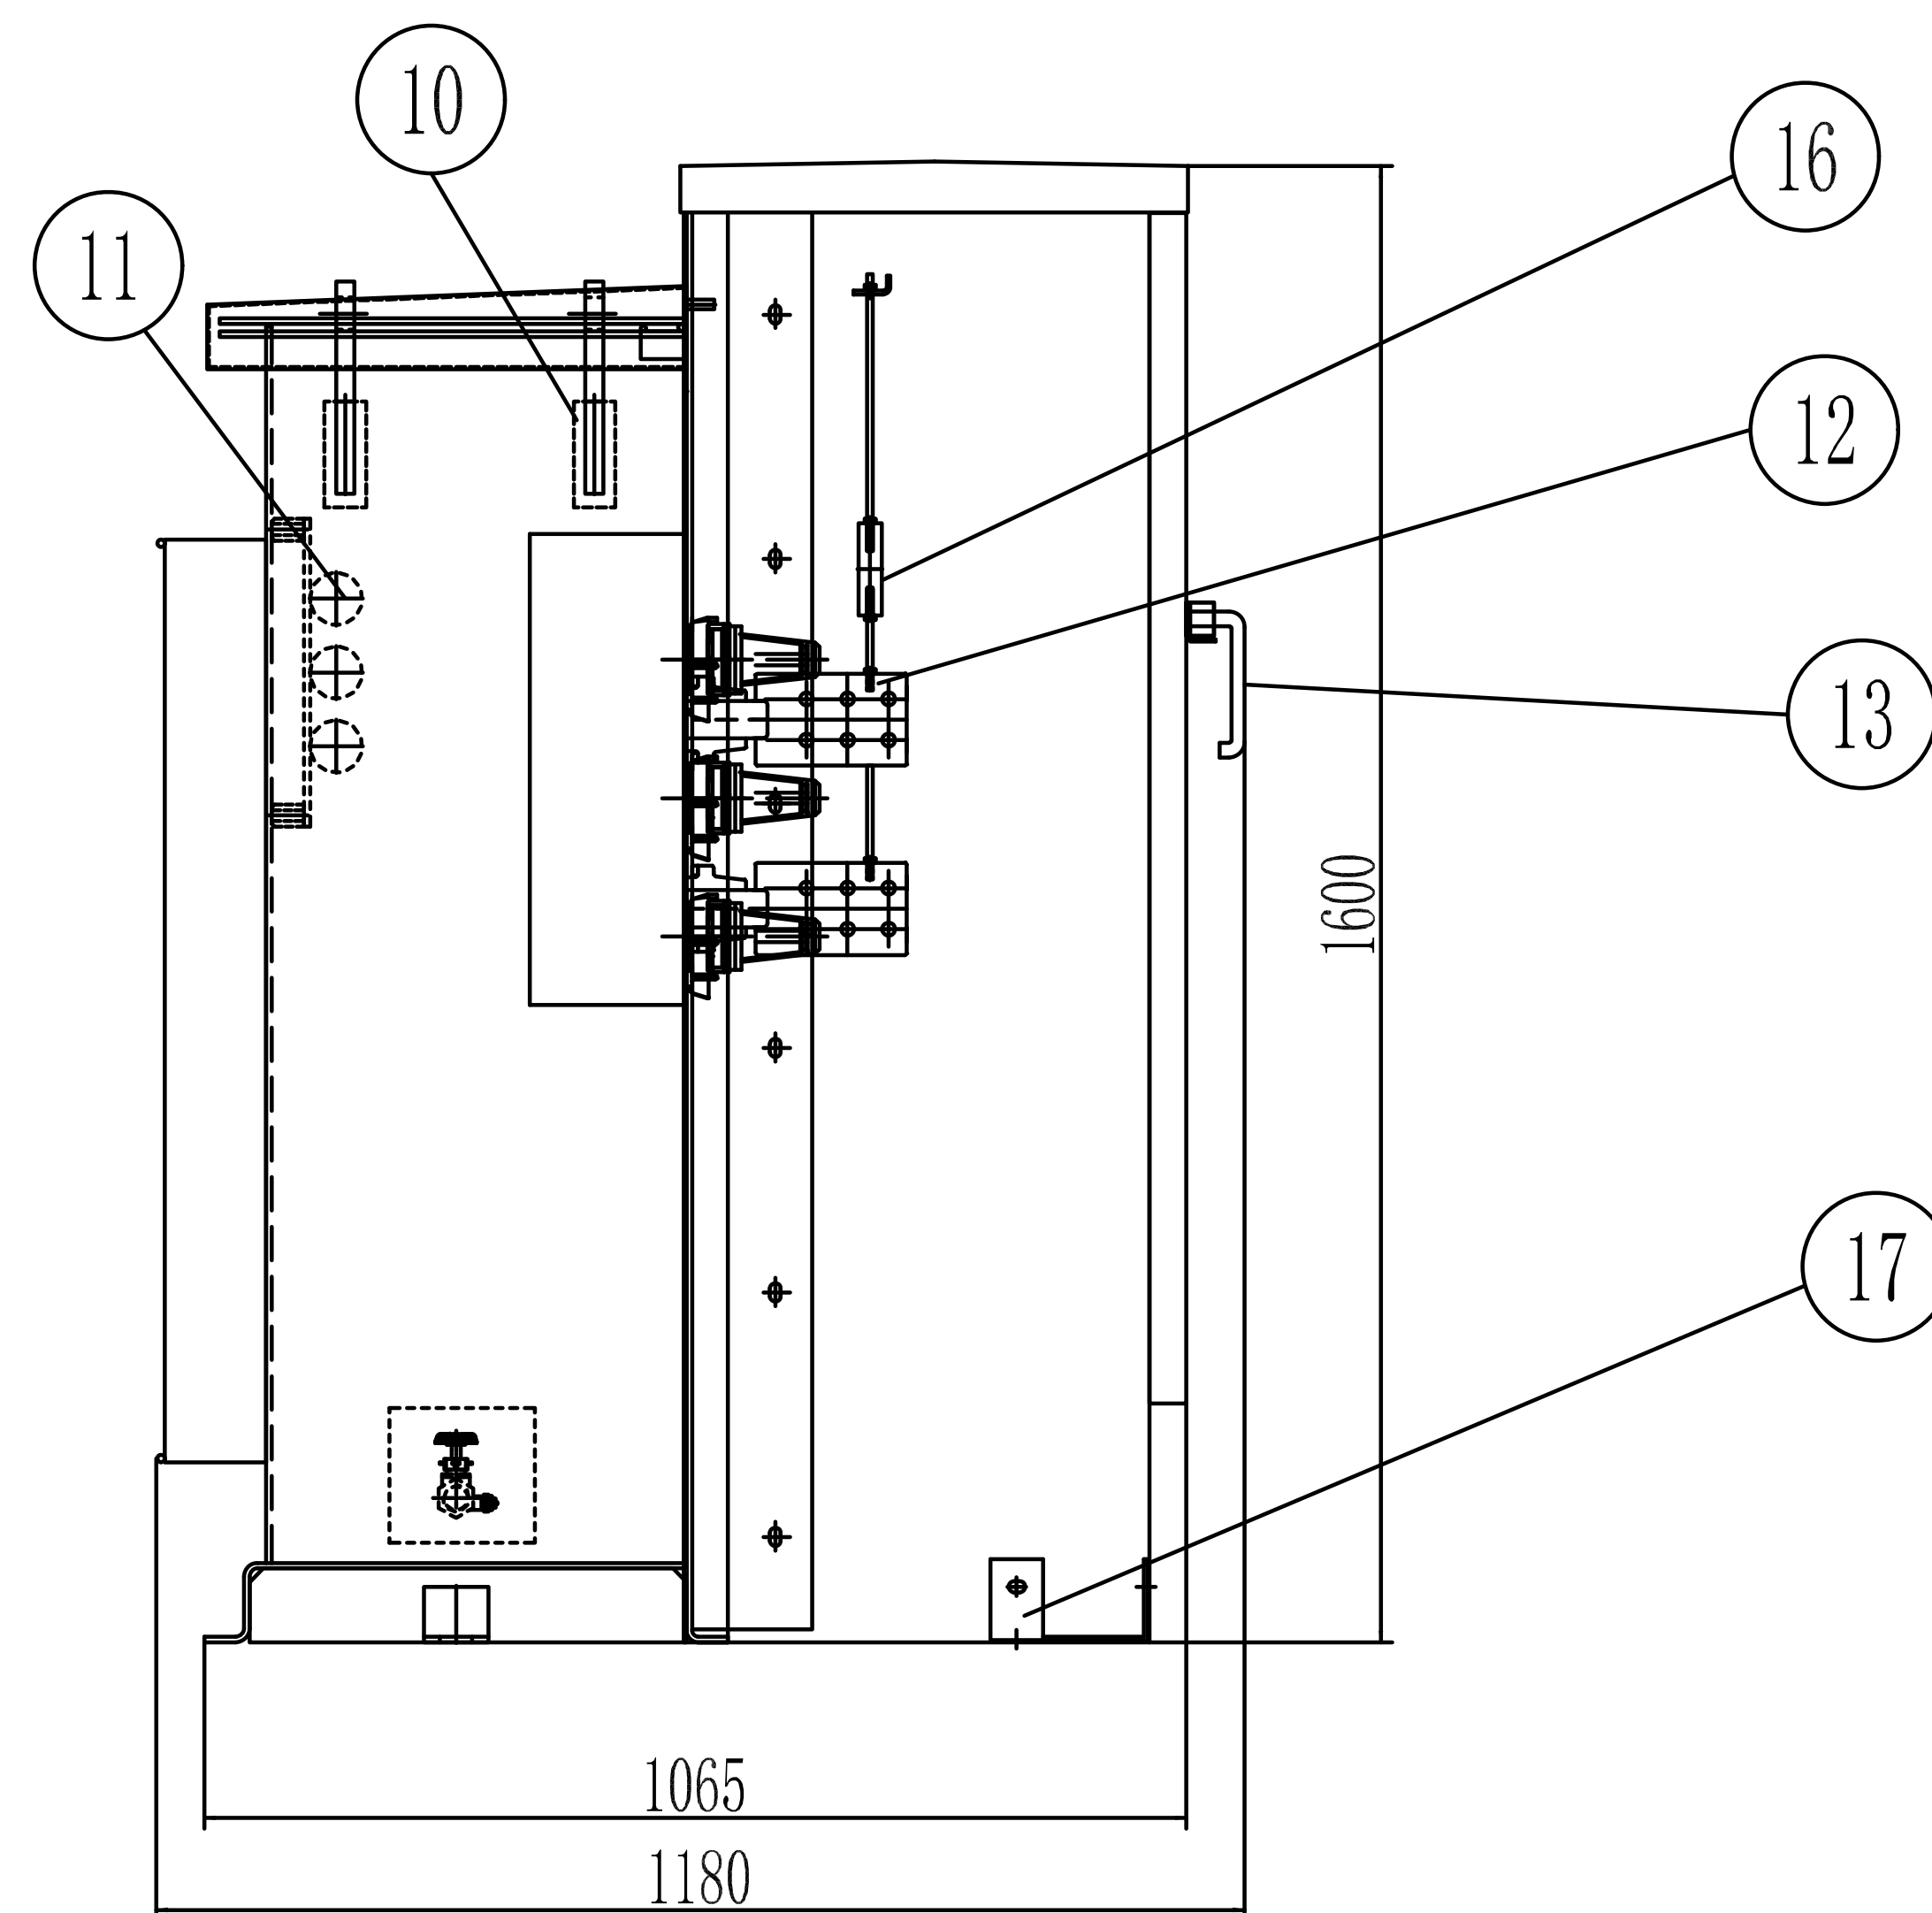
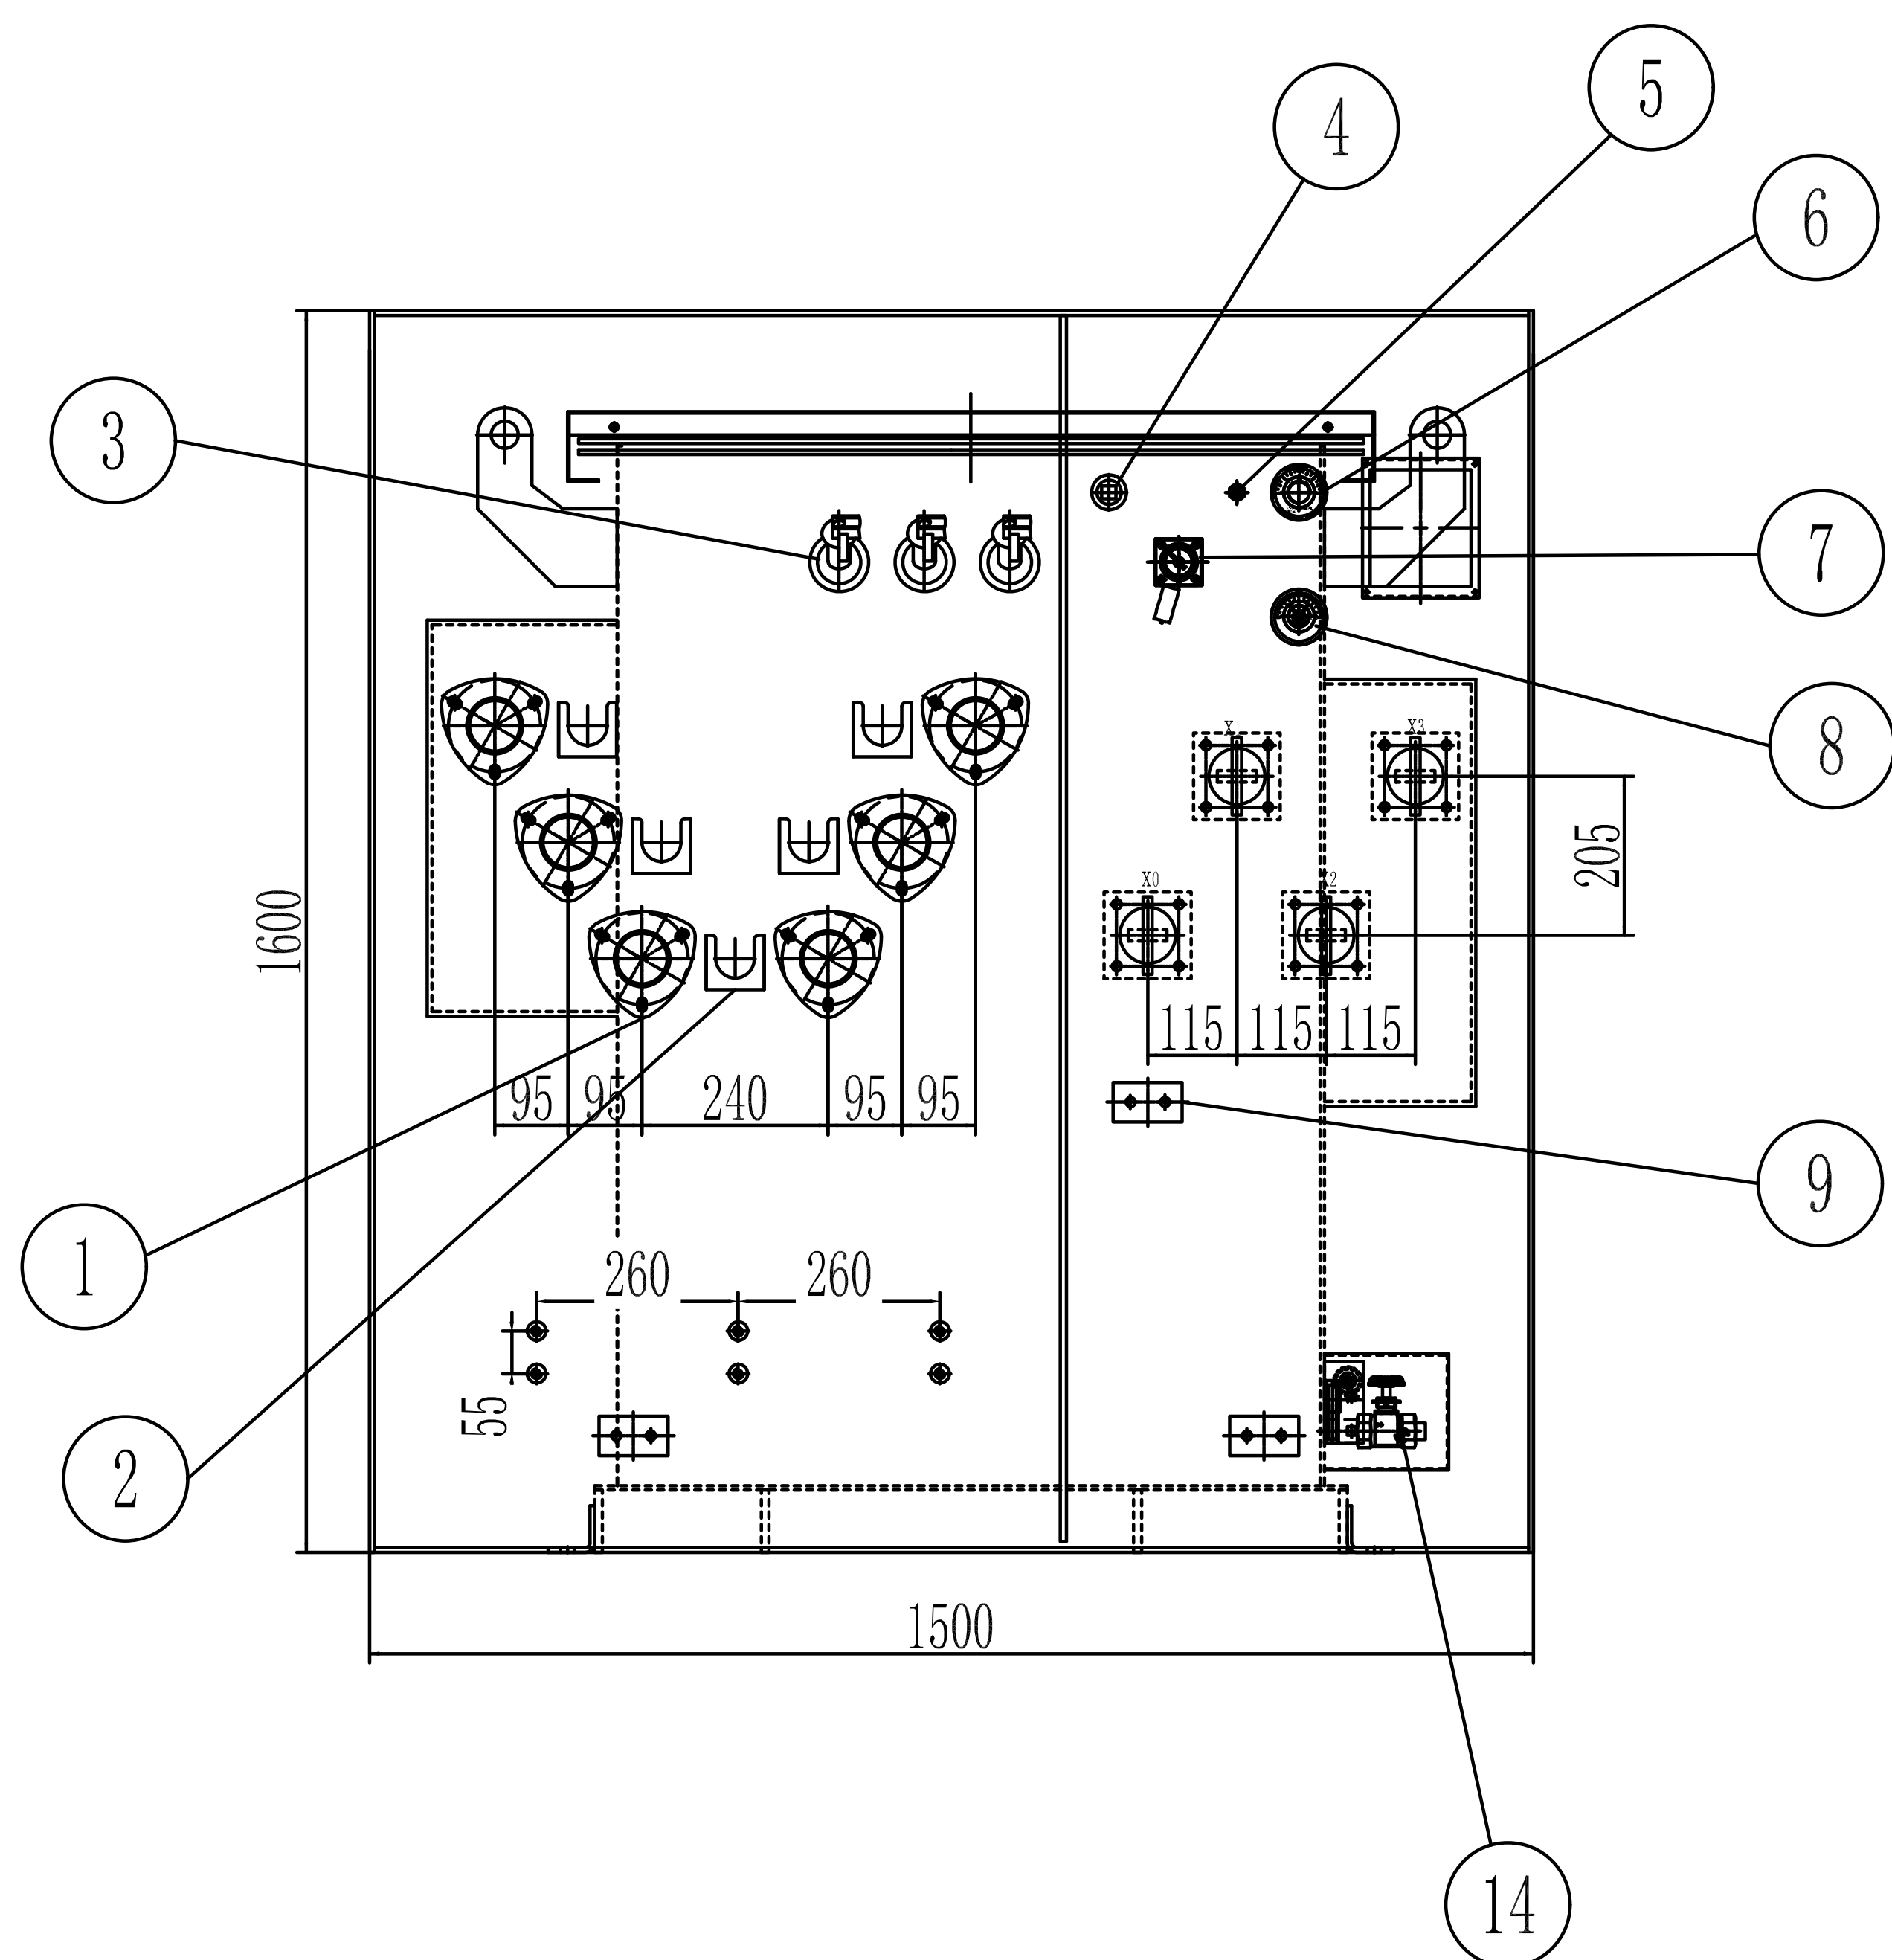


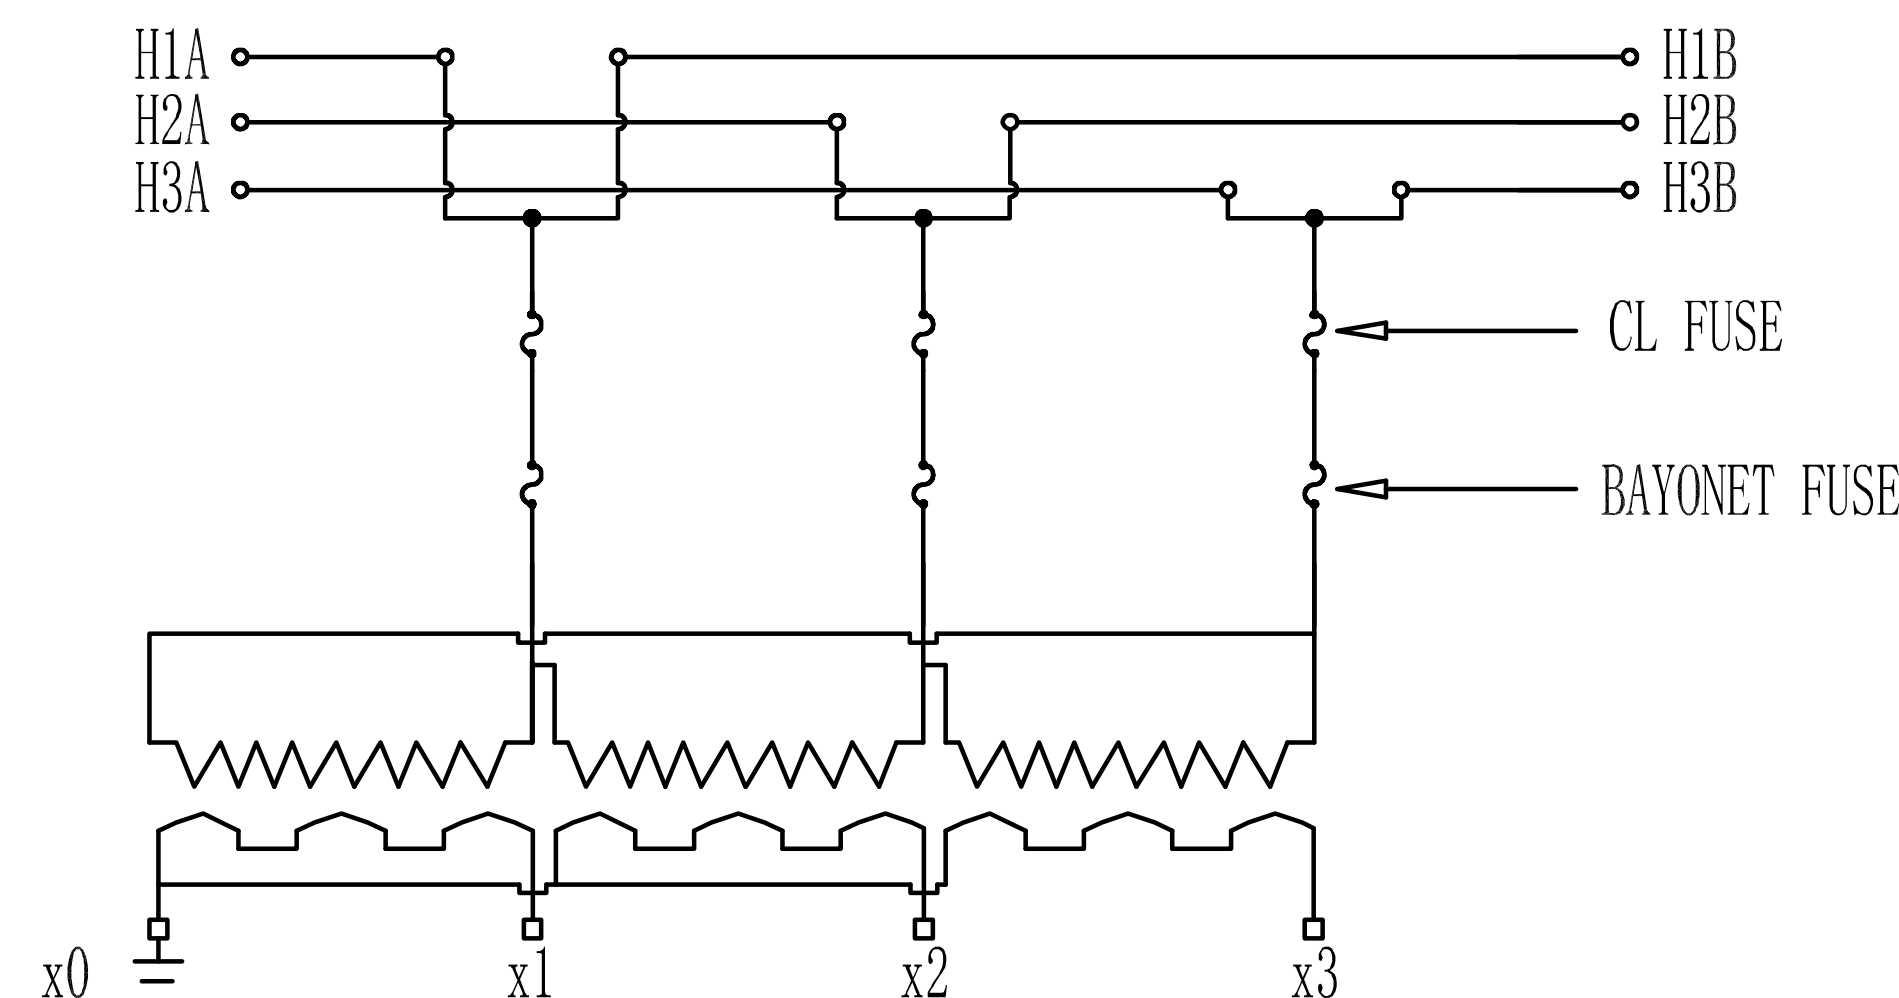


L. V. TERMINAL

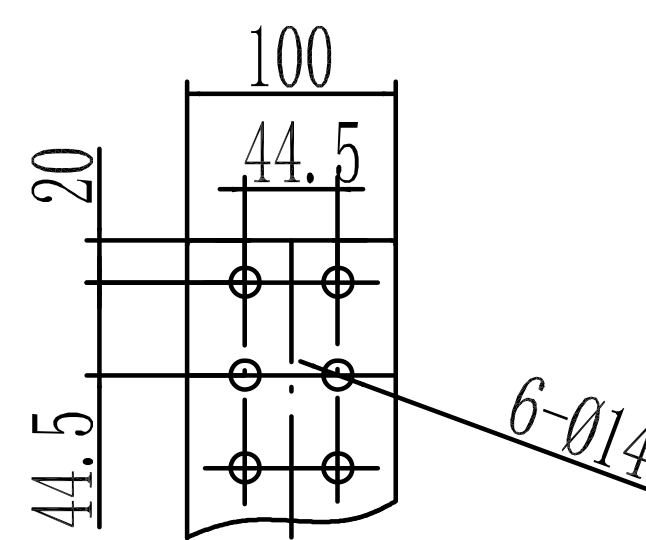

ALL DIMENSION DEVIATIONS: $\pm 10\%$

GROUND PAD
STAINLESS STEEL

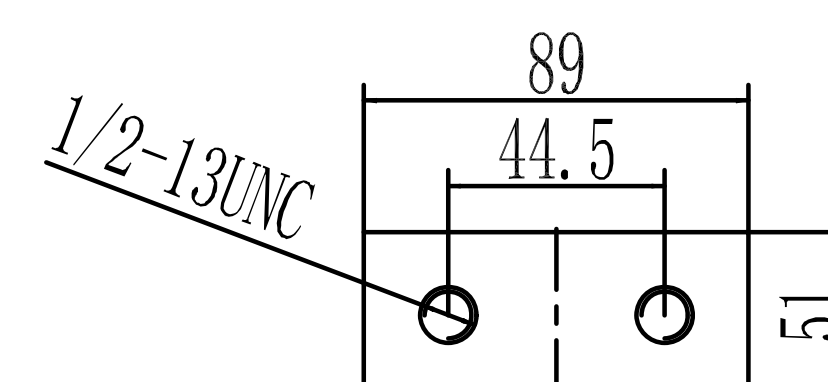

ITEM	WEIGHT (LBS)
CORE WEIGHT	905 LBS
TOTAL OIL WEIGHT	815 LBS
TOTAL WEIGHT	3185 LBS

TECHNICAL DATA	
RATING	150kVA
PRIMARY VOLTAGE (V)	12000DELTA
SECONDARY VOLTAGE (V)	208GrY/120
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
CONDUCTOR	ALUMINUM
PRIMARY BIL VOLTAGE	95kV
SECONDARY BIL VOLTAGE	30kV
INSULATING OIL	FR3 OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	2310 W
NO LOAD LOSSES	200 W
IMPEDANCE	2-4.5%
ALTITUDE	≤1000m
COLOR	MUNSELL NO. 7.0 GY 3.2/1.5
CORE FORM	THREE-PHASE THREE-COLUMN

17	CONNECTED STEEL-PLATE	4
16	BUSHING SPADE SUPPORT	4
15	NAMEPLATE	2
14	DRAIN VALVE LOCKABLE BOX	1
13	DOOR HANDLE	1
12	LV BUSHING	4
11	BACK UP FUSE	3
10	LIFTING LUG	4
9	GROUND STEEL PADS	3
8	OIL TEMPERATURE GAUGE	1
7	OIL LEVEL GAUGE	1
6	VACCUM PRESSURE GAUGE	1
5	PRESSURE RELIEF VALVE	1
4	FILL PLUG	1
3	BAYONET FUSE	3
2	PARKING STAND BRACKET	5
1	HV BUSHING WITH 200AMP BUSHING WELL INSERTS	6
ITEM	DESCRIPTION	QTY

ZGSL-H-150/12-0.208
PAD MOUNTED TRANSFORMER

OUTLINE DRAWING

Eaglerise Electric&
Electronic (China)Co.,Ltd.