

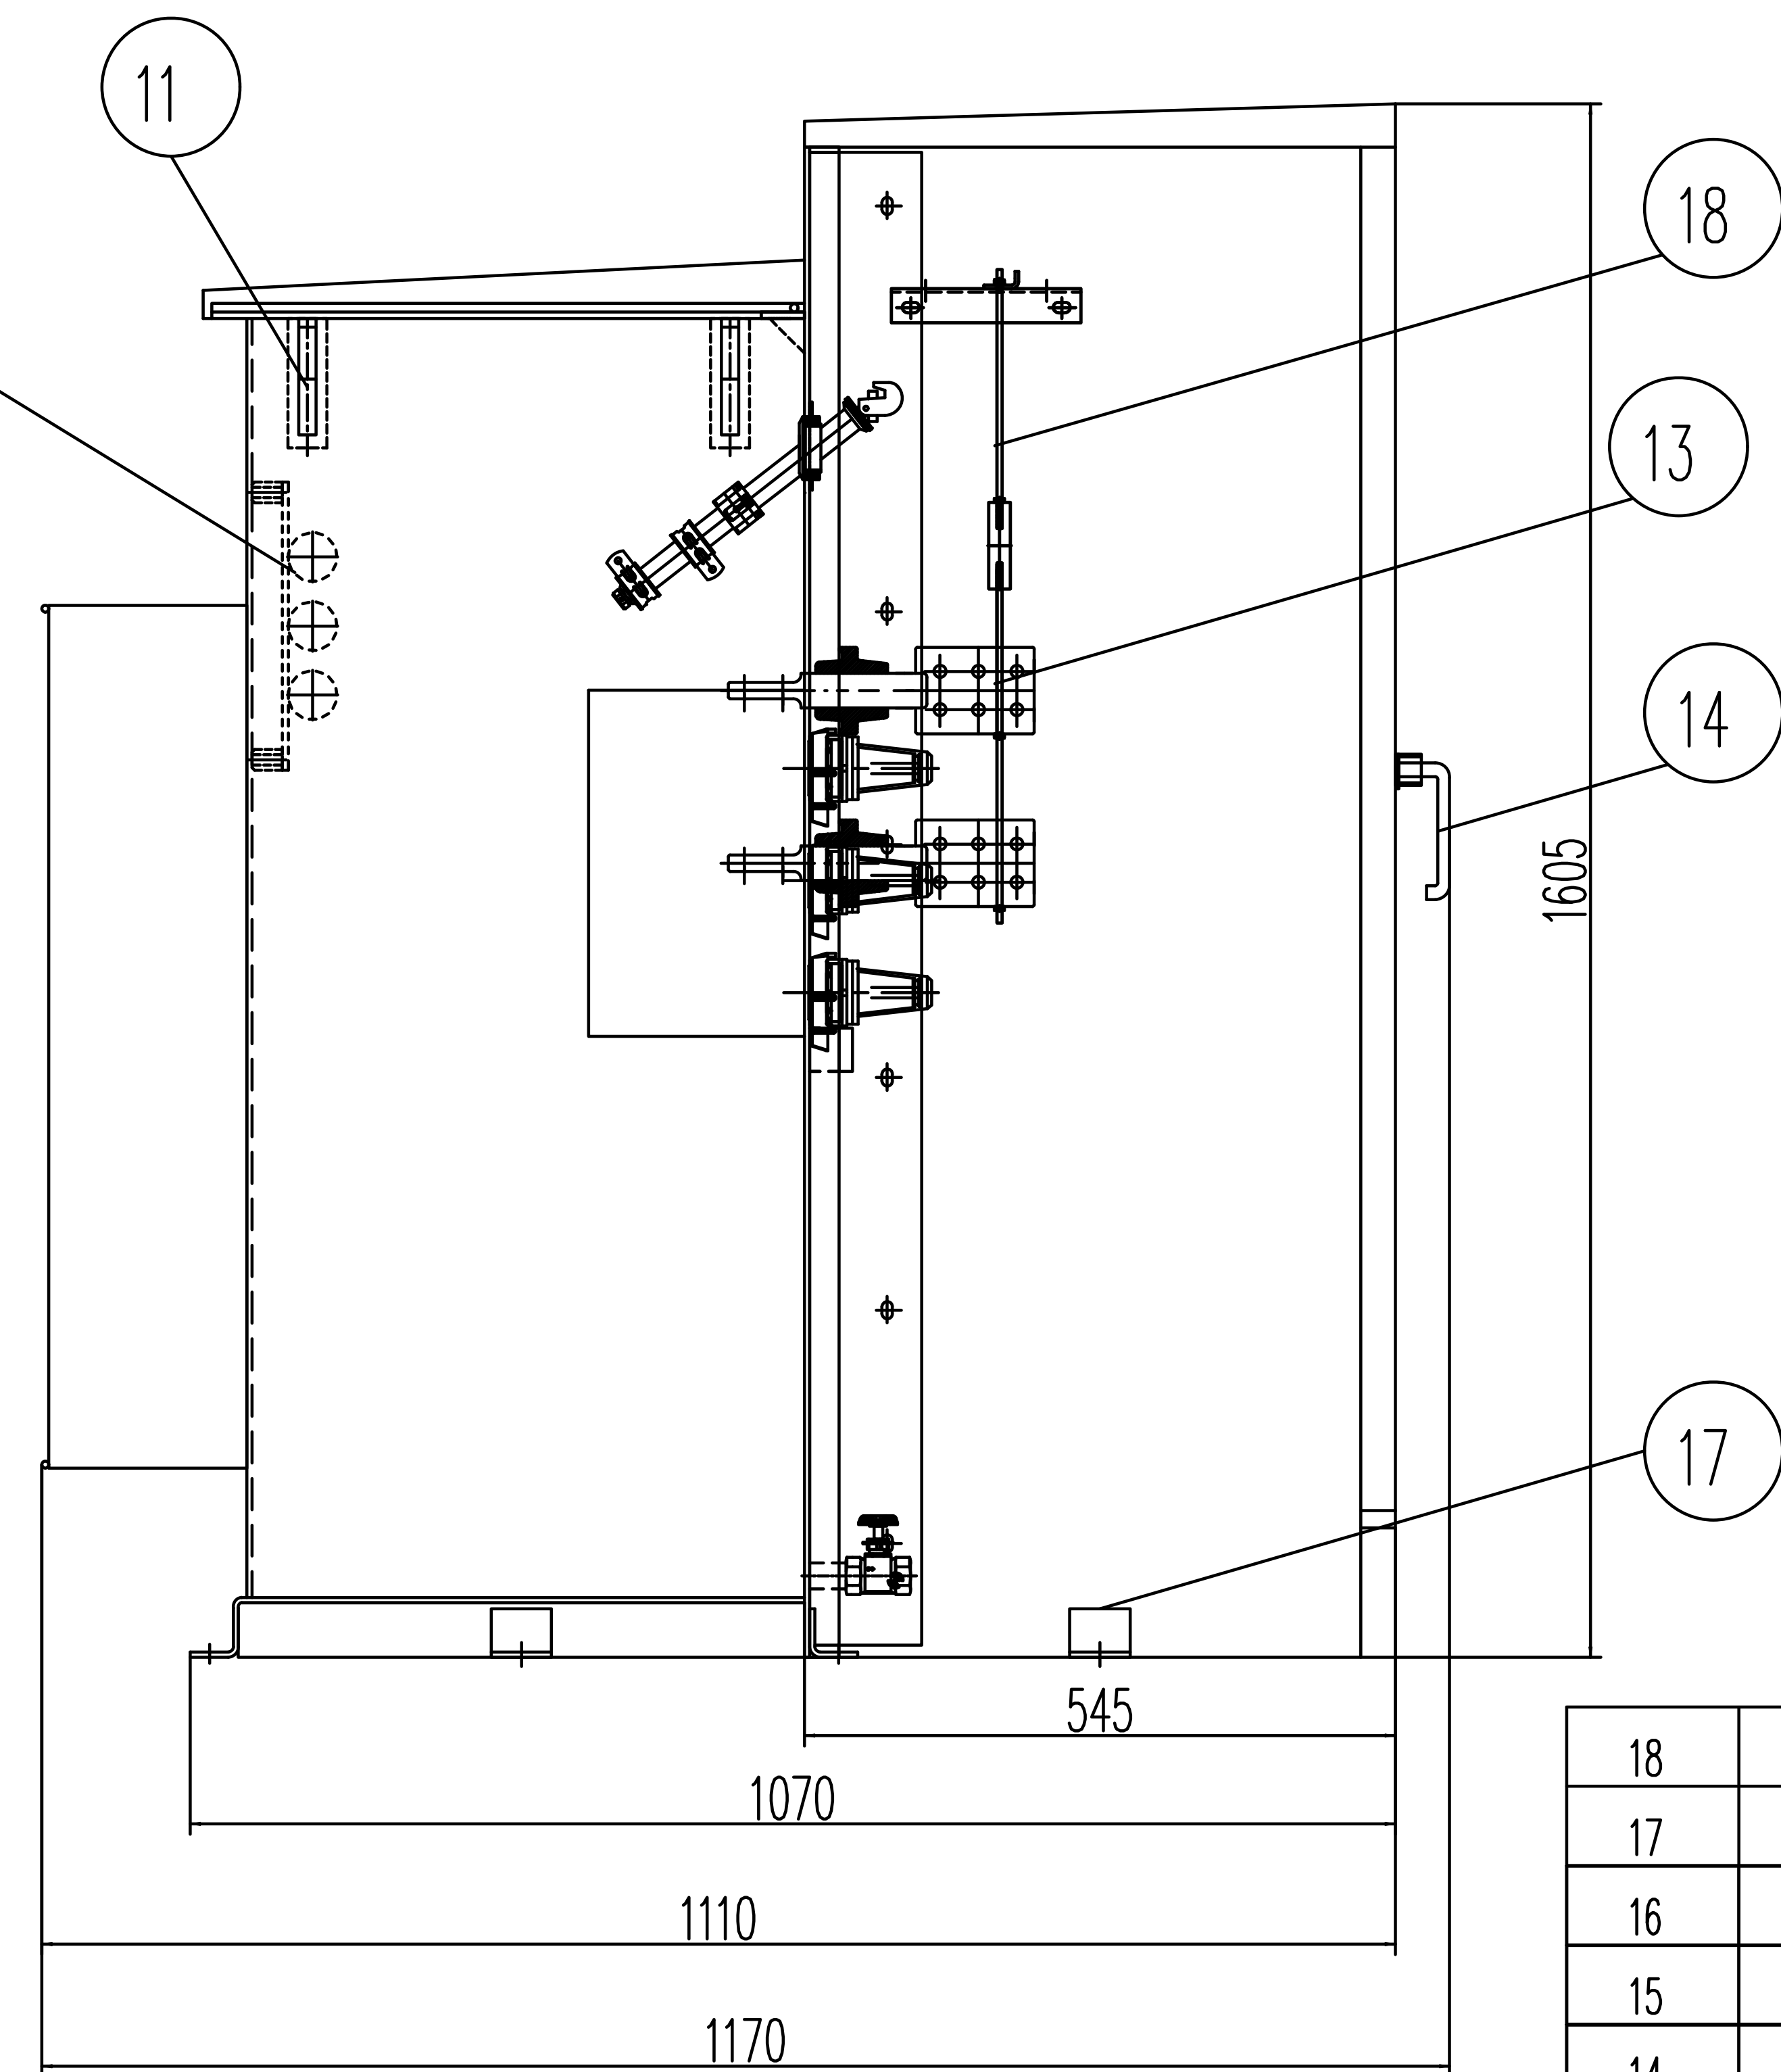


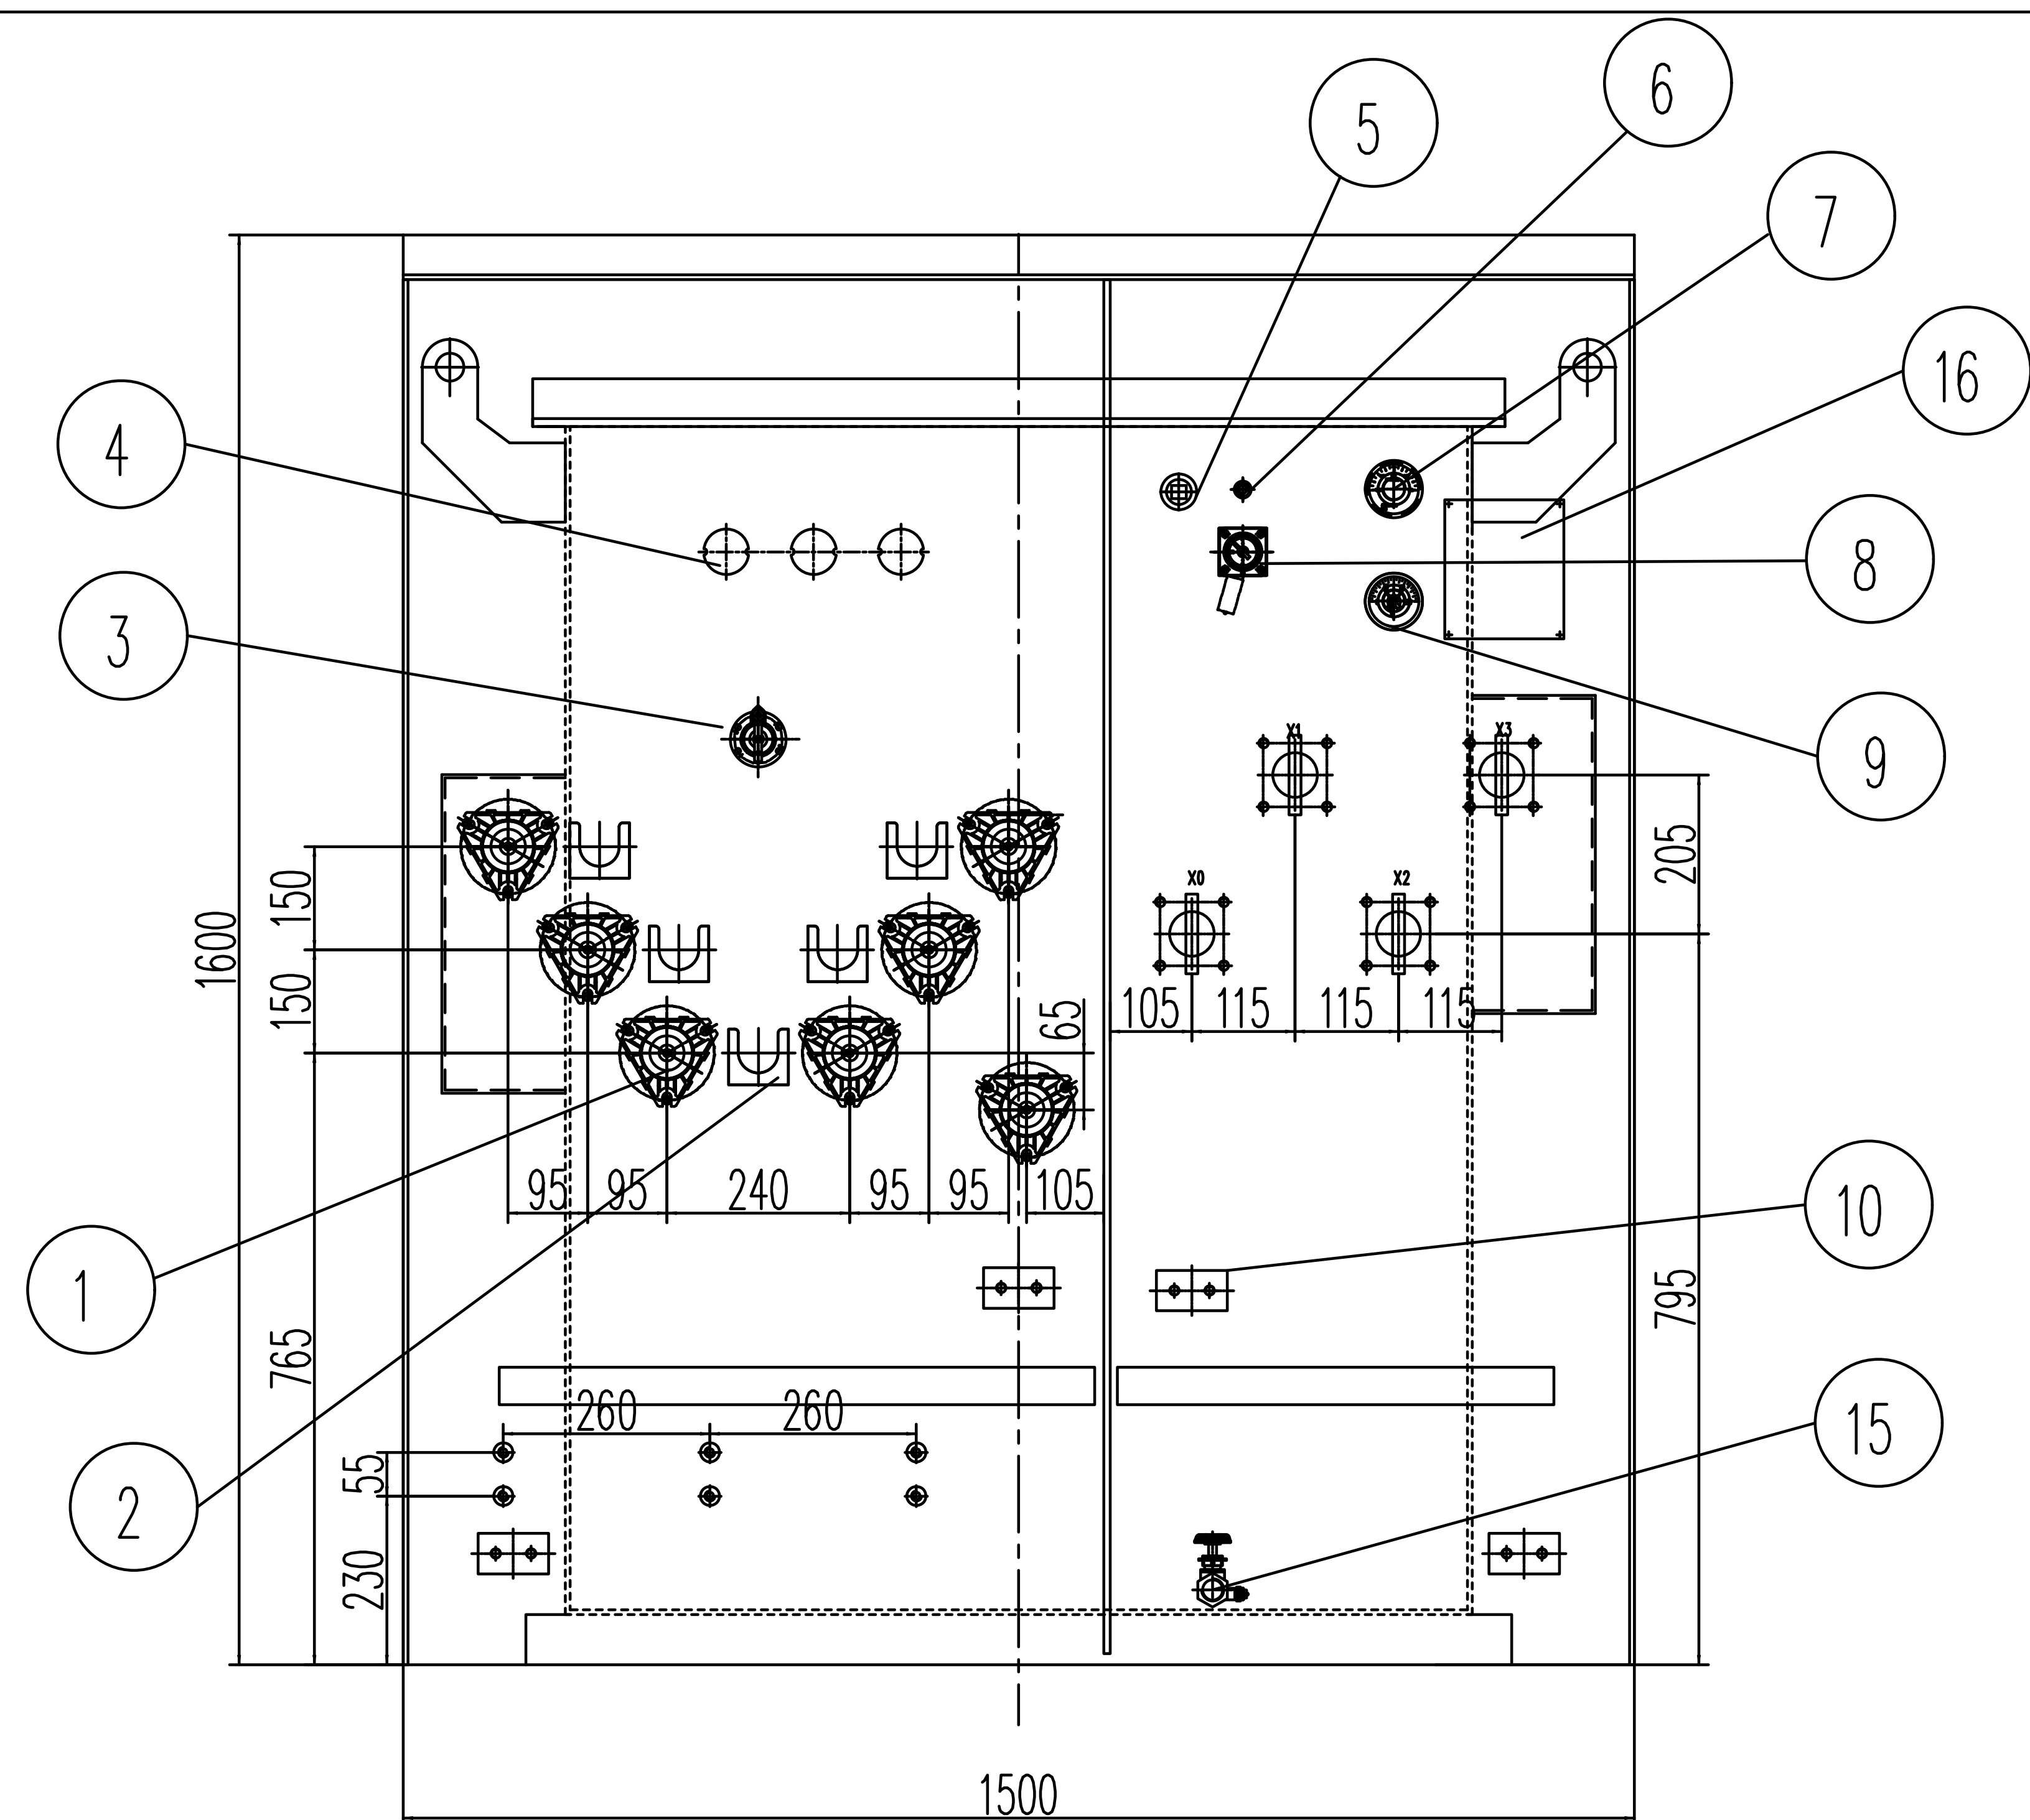


ITEM	WEIGHT(LBS)
CORE WEIGHT	598 LBS
TOTAL OIL WEIGHT	805 LBS
TOTAL WEIGHT	2238 LBS


TECHNICAL DATA	
RATING	150KVA
PRIMARY VOLTAGE(V)	124700V
SECONDARY VOLTAGE(V)	480/277.13
FREQUENCY	60Hz
VECTOR GROUP	YNyn0
CONDUCTOR	ALUMINUM
PRIMARY BIL VOLTAGE	95kV
SECONDARY BIL VOLTAGE	30kV
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65℃
LOAD LOSS AT RATED VOLTAGE	2310 W
NO LOAD LOSSES	200 W
IMPEDANCE	2.0-4.5%
ALTITUDE	≤1000m
COLOR	MUNSELL NO.7.0 GY 3.2/1.5
CORE FORM	THREE-PHASE THREE-COLUMN

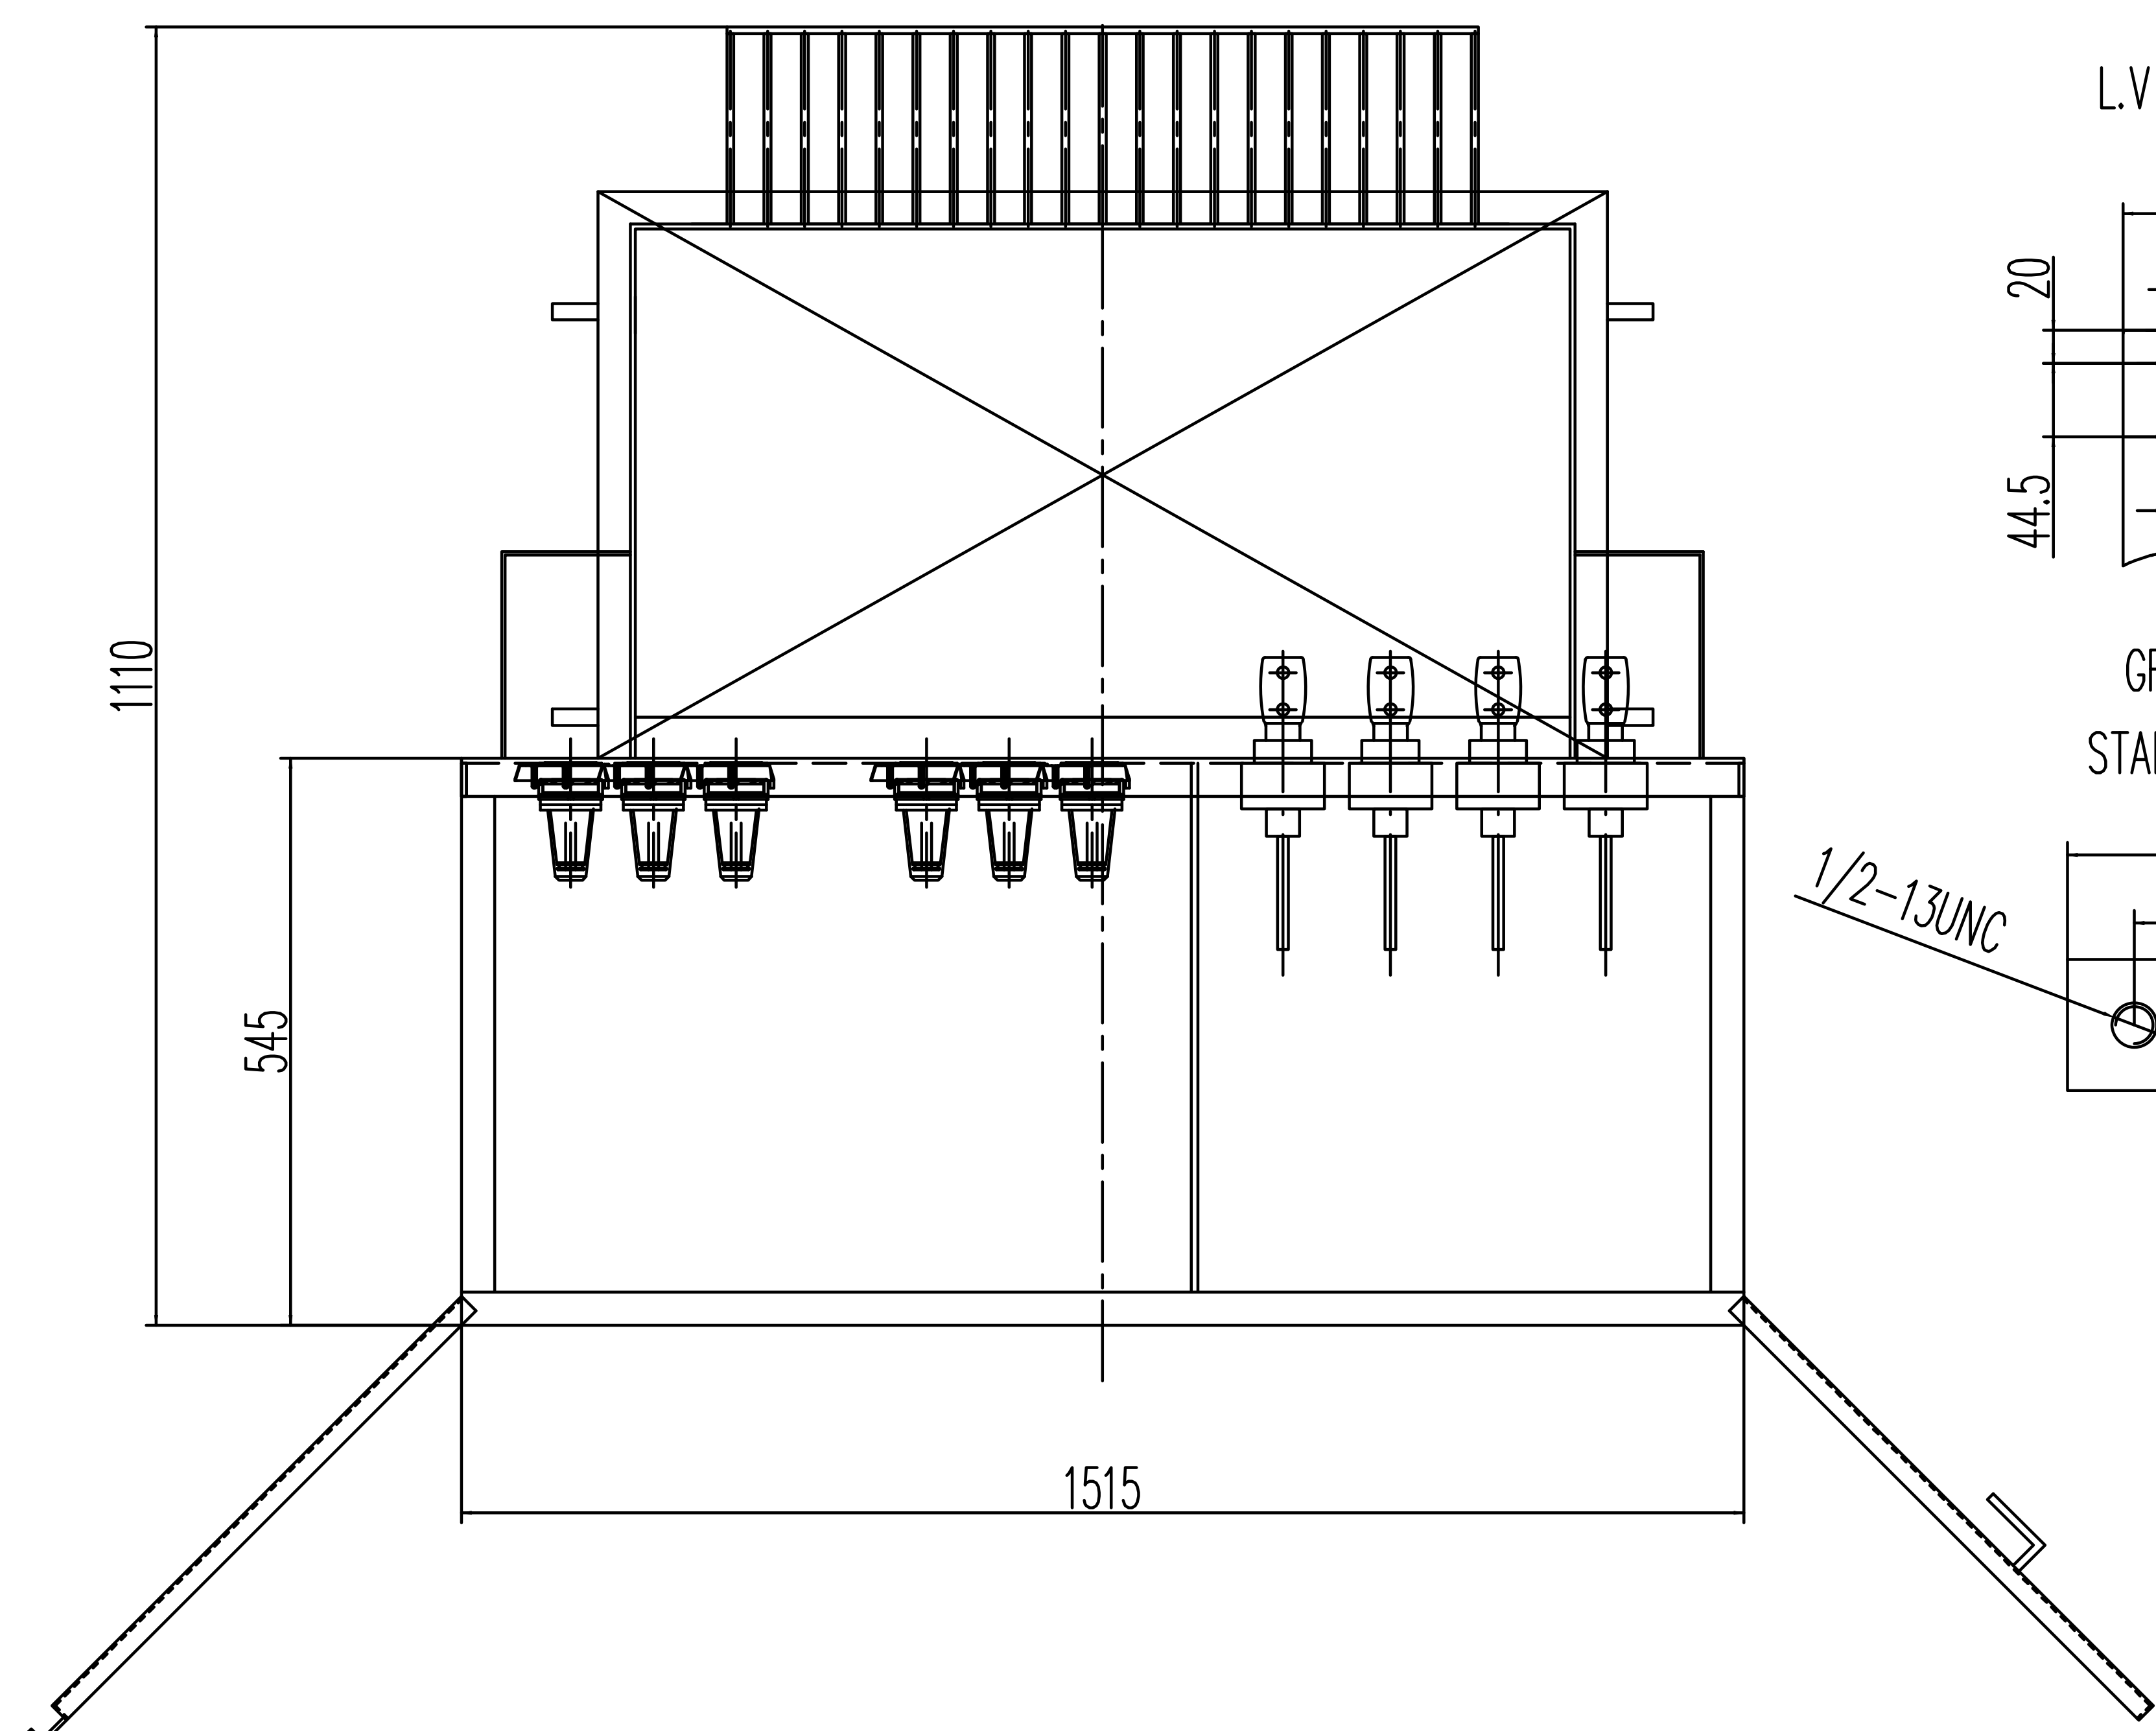


L.V. TERMINAL

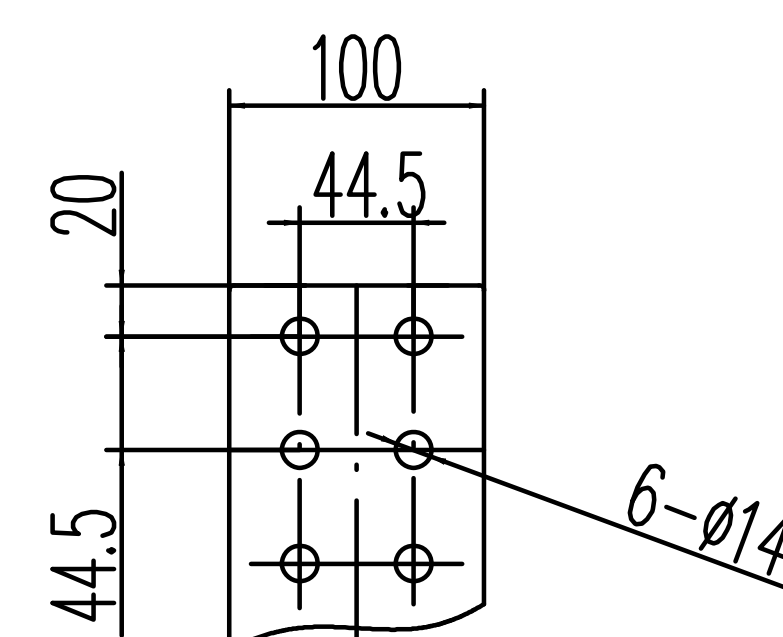

GROUND PAD
STAINLESS STEEL

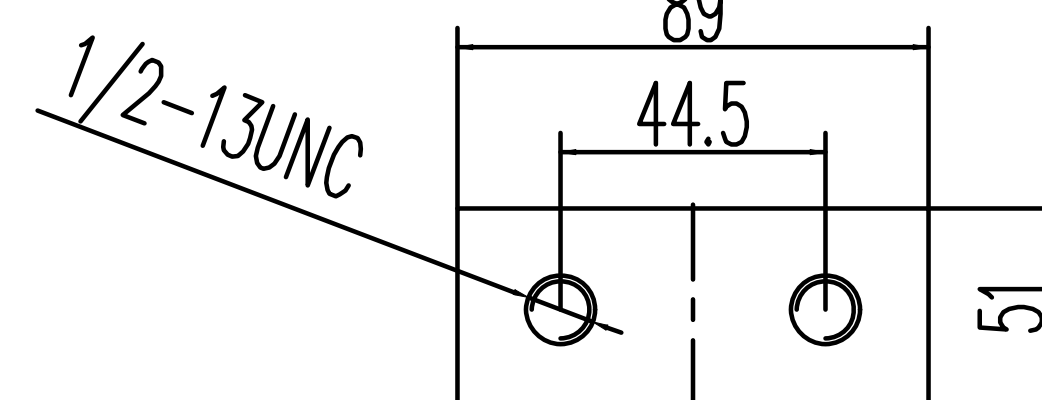

ALL DIMENSION DEVIATIONS: ±10%

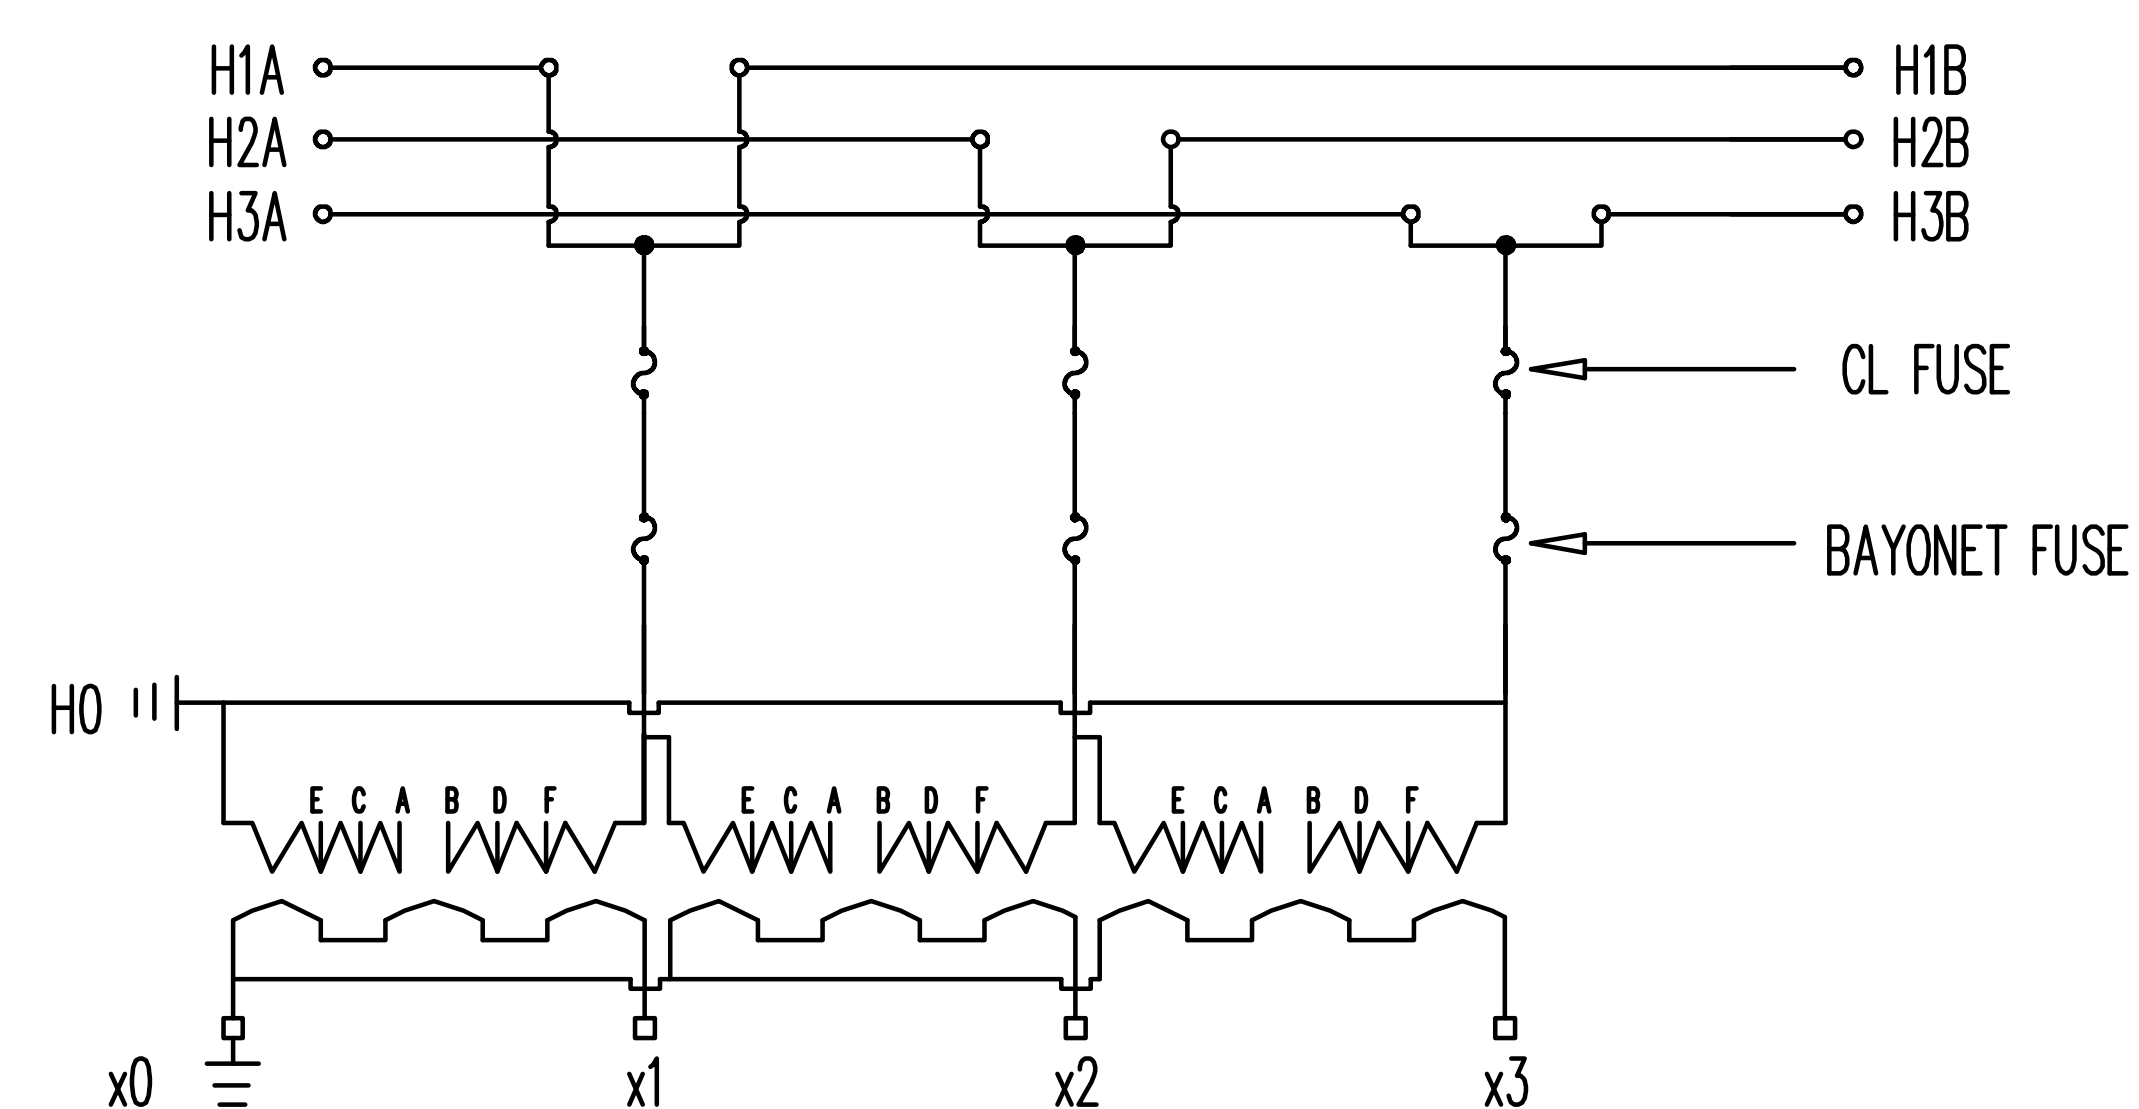

18	BUSHING SPADE SUPPORT	4
17	CONNECTED STEEL-PLATE	4
16	NAMEPLATE	2
15	DRAIN VALVE	1
14	DOOR HANDLE	1
13	LV BUSHING	4
12	BACK UP FUSE	3
11	LIFTING LUG	4
10	GROUND STEEL PADS	4
9	OIL TEMPERATURE GAUGE	1
8	OIL LEVEL GAUGE	1
7	VACCUM PRESSURE GAUGE	1
6	PRESSURE RELIEF VALVE	1
5	FILL PLUG	1
4	BAYONET FUSE	3
3	TAP CHANGER	1
2	PARKING STAND BRACKET	5
1	HV BUSHING WITH 200AMP BUSHING WELL INSERTS	7
ITEM	DESCRIPTION	QTY

ZGSL-H-150/12.47-0.48

PAD MOUNTED TRANSFORMER

OUTLINE DRAWING

Eaglerise Electric&
Electronic (China)Co.,Ltd.