


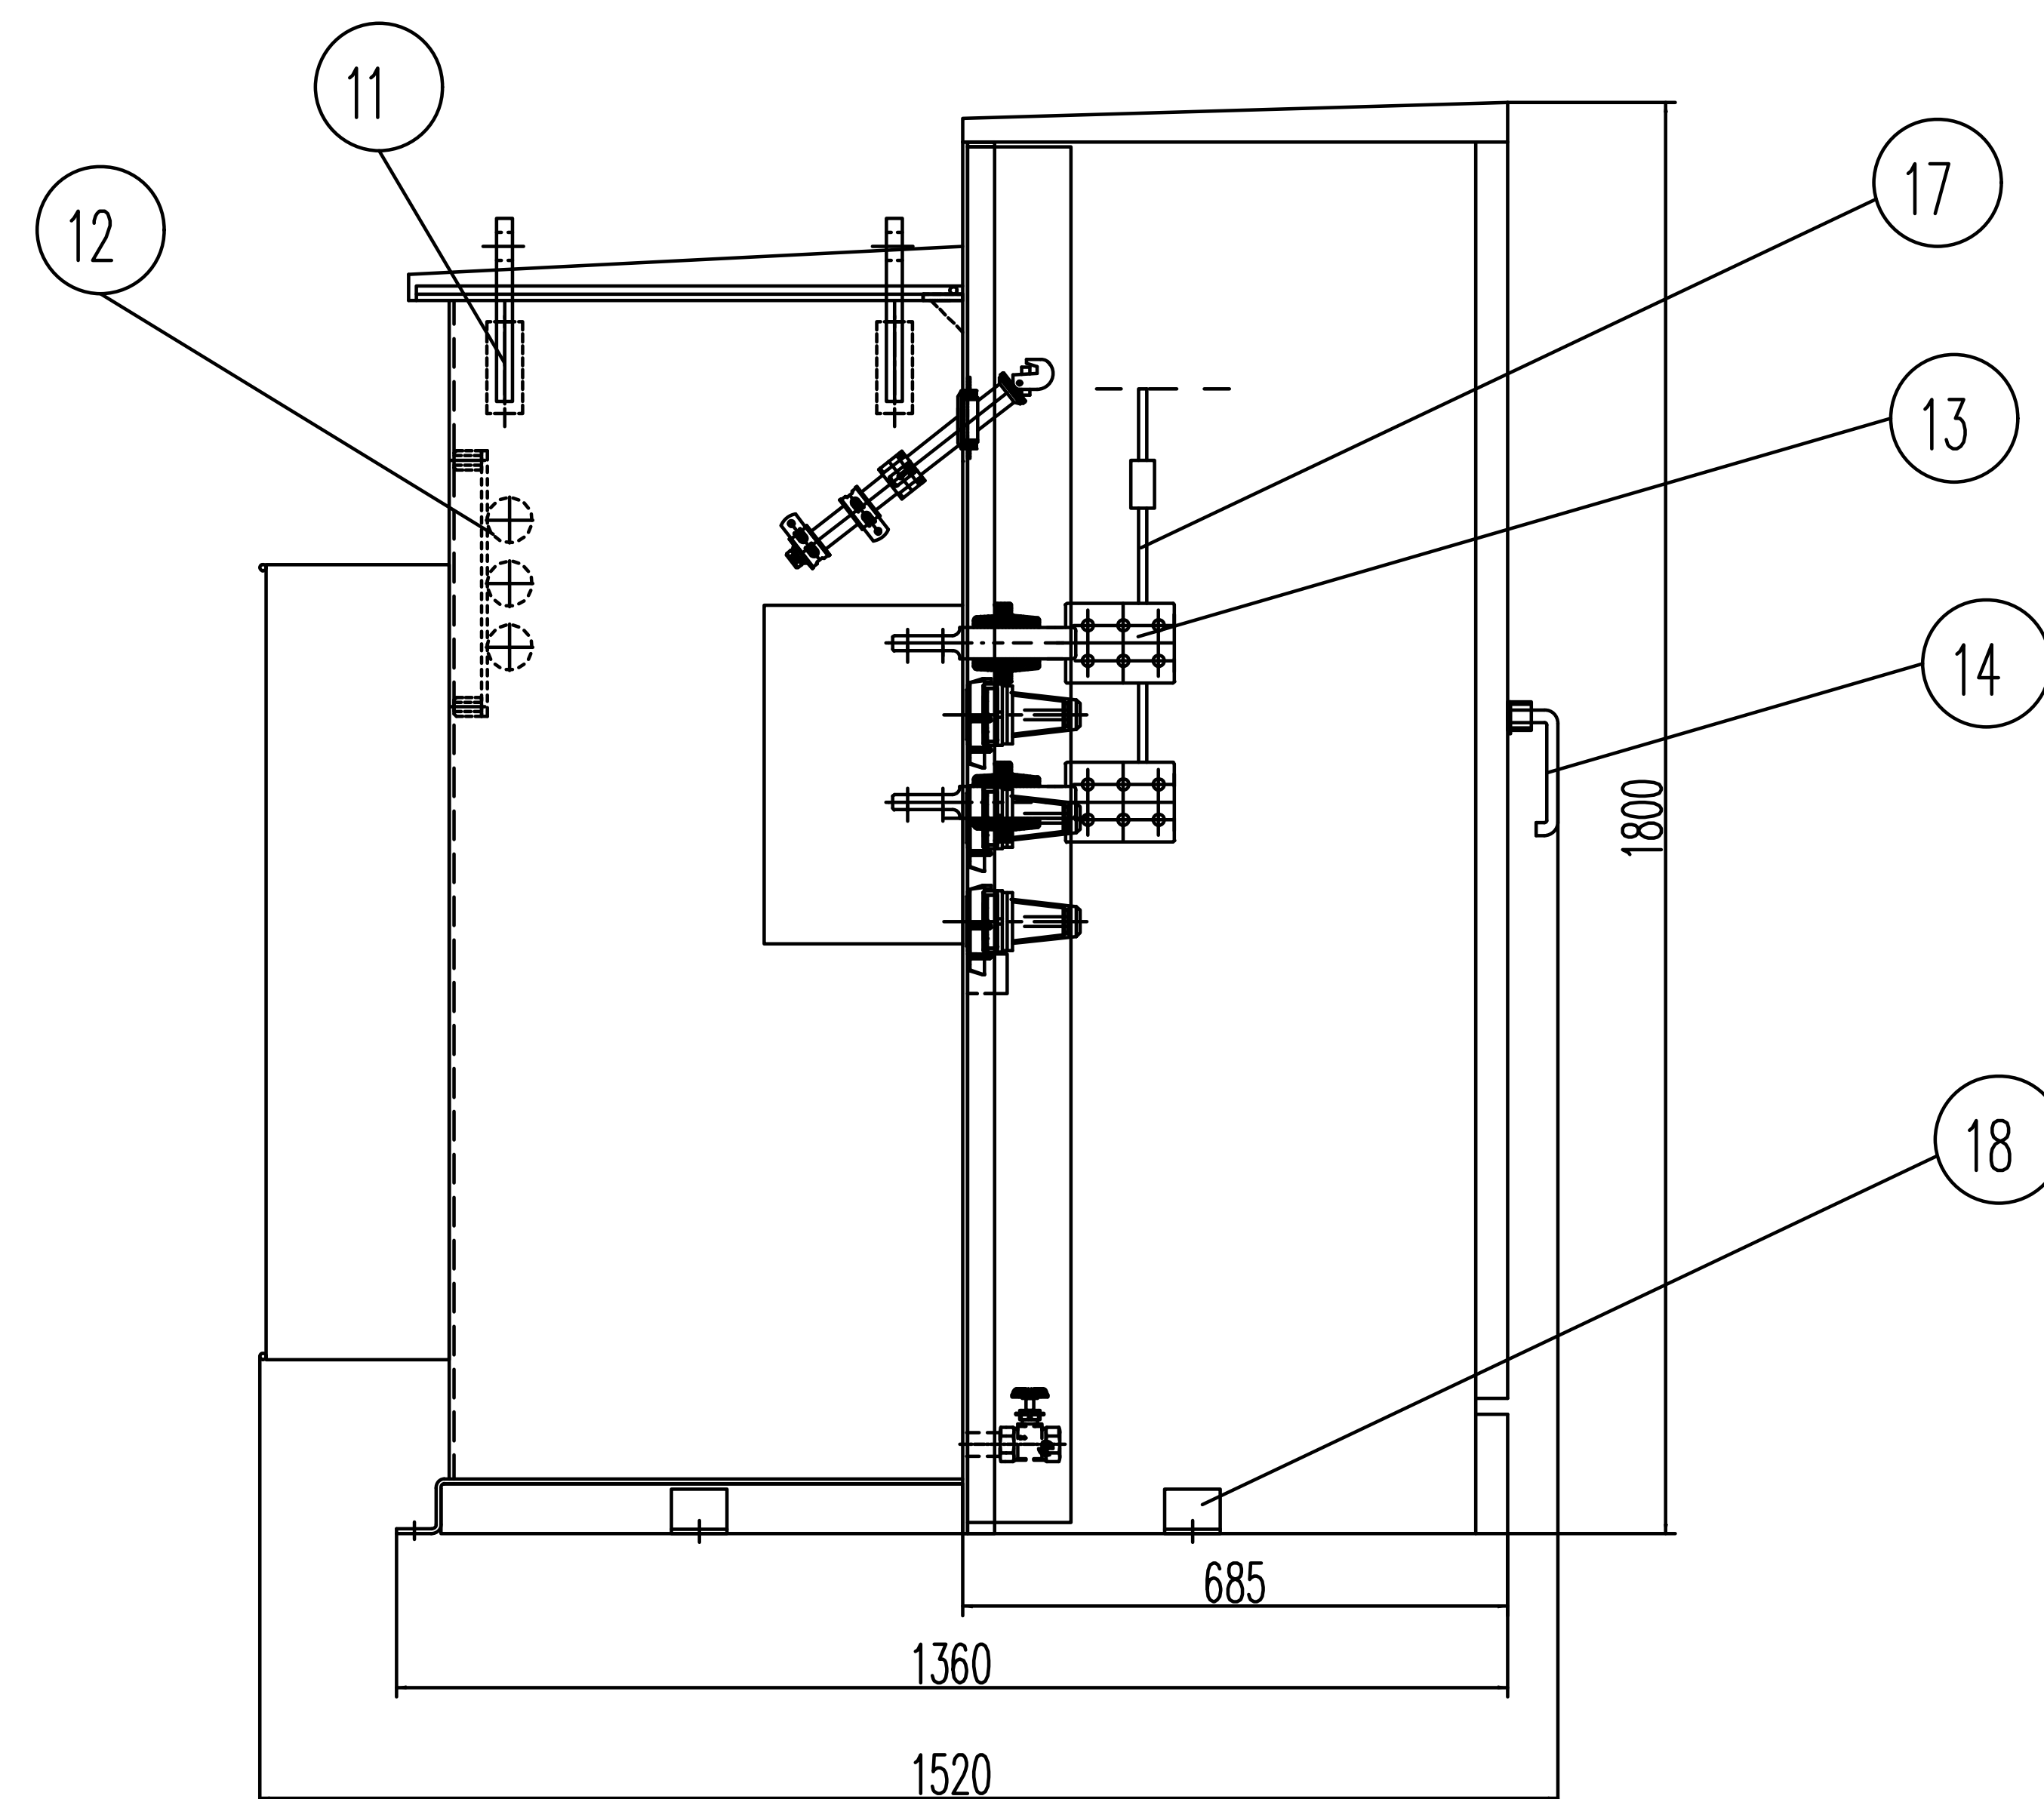


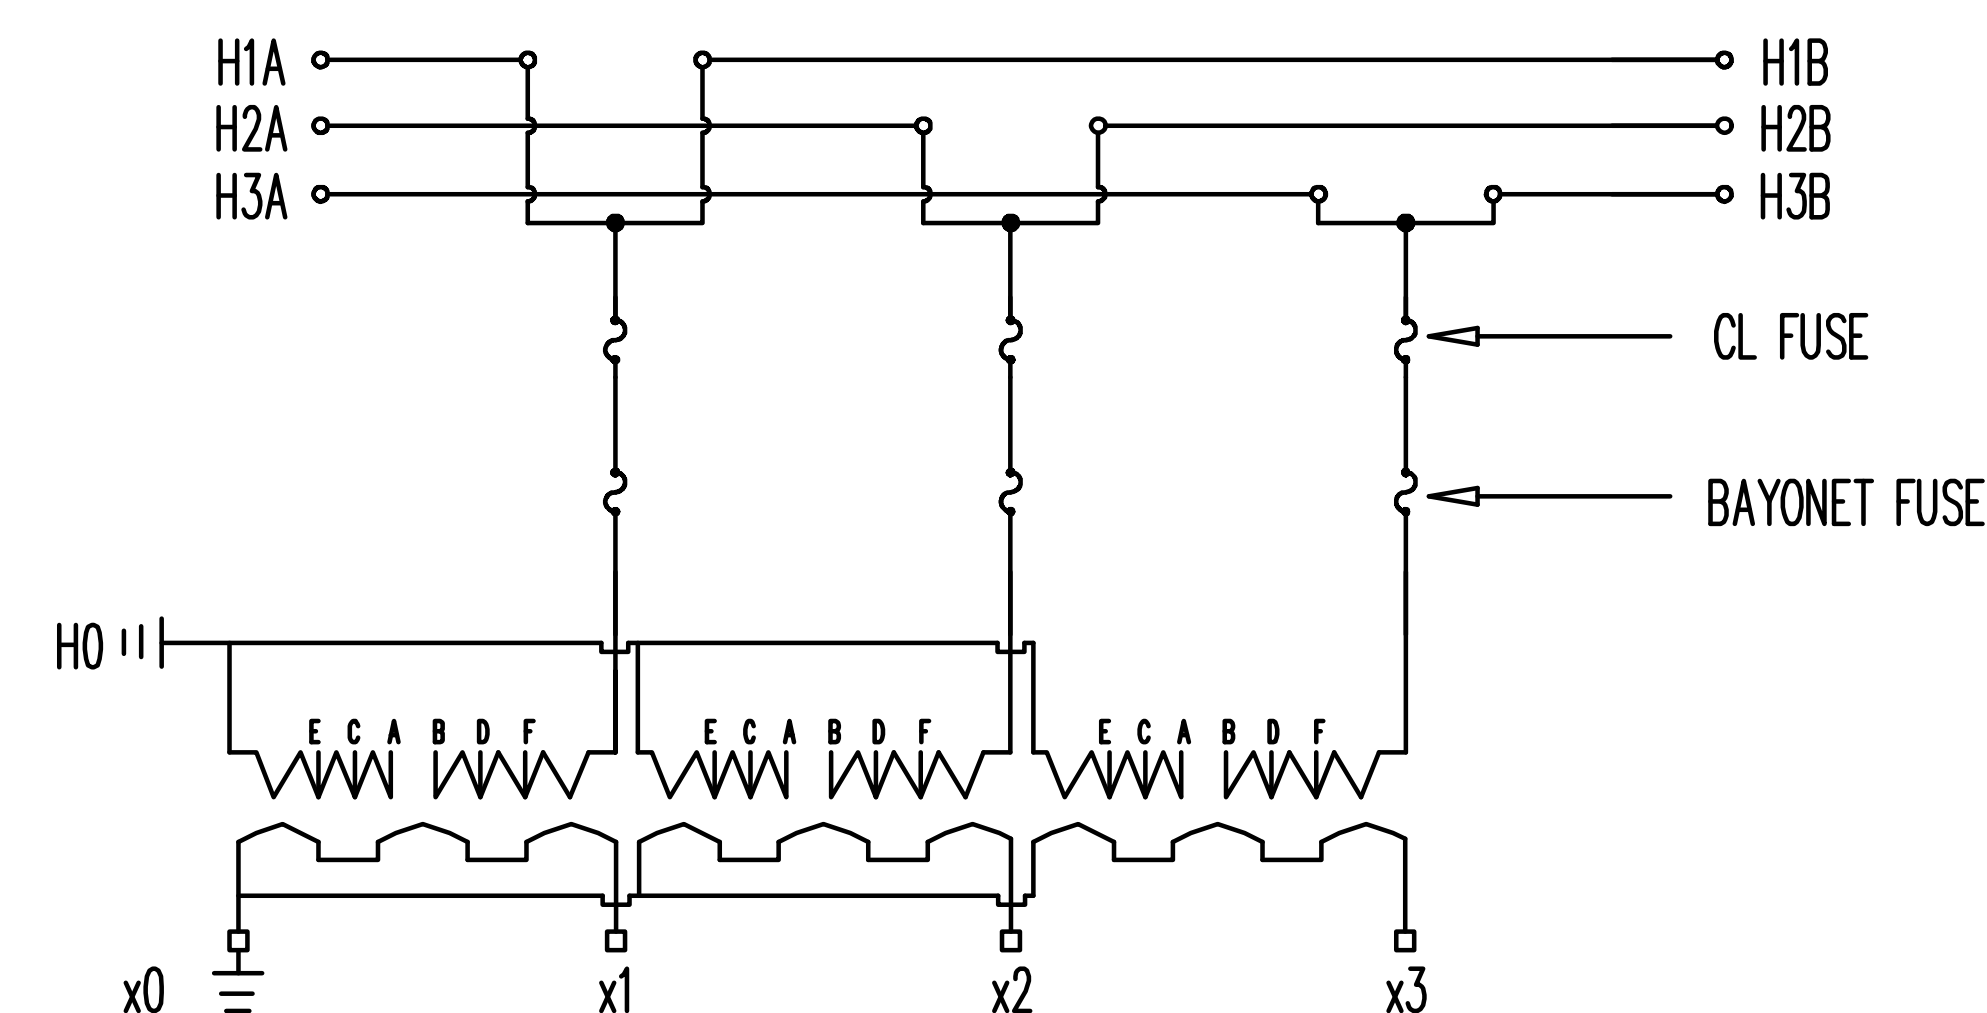

TECHNICAL DATA	
RATING	300kVA
PRIMARY VOLTAGE(V)	12470DELTA
SECONDARY VOLTAGE(V)	208GrdY/120
FREQUENCY	60Hz
VECTOR GROUP	Yyn0
CONDUCTOR	ALUMINUM
PRIMARY BIL VOLTAGE	95kV
SECONDARY BIL VOLTAGE	30kV
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65℃
LOAD LOSS AT RATED VOLTAGE	3300 W
NO LOAD LOSSES	430 W
IMPEDANCE	3.5-4.5%
ALTITUDE	≤1000m
COLOR	MUNSELL NO.7.0 GY 3.2/1.5
CORE FORM	THREE-PHASE THREE-COLUMN

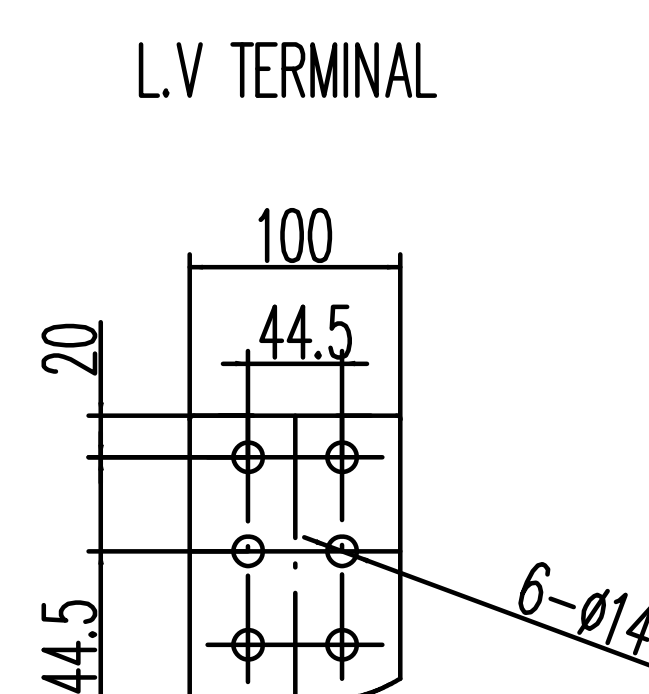

ALL DIMENSION DEVIATIONS: $\pm 10\%$

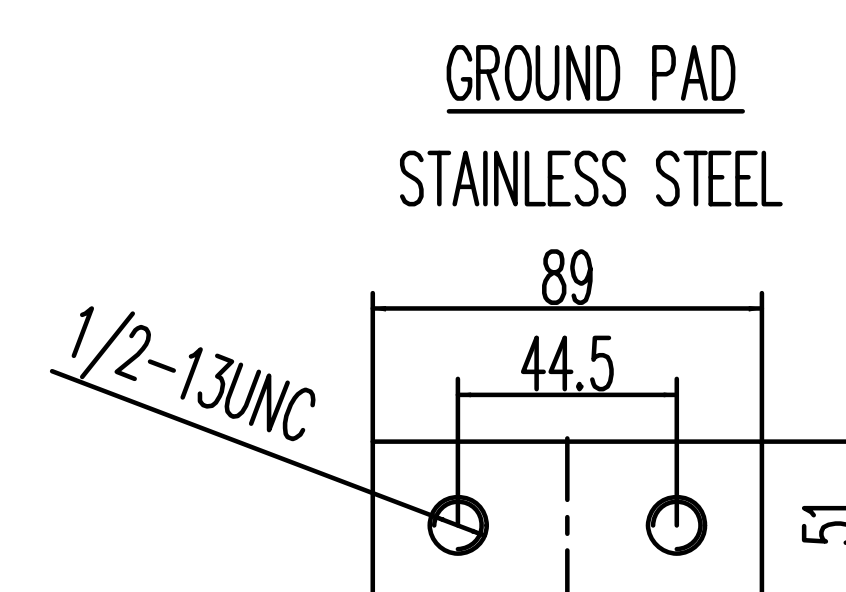

ZGSL-H-300/12.47-0.208	Eaglerise Electric& Electronic (China)Co.,Ltd.
PAD MOUNTED TRANSFORMER	
OUTLINE DRAWING	