

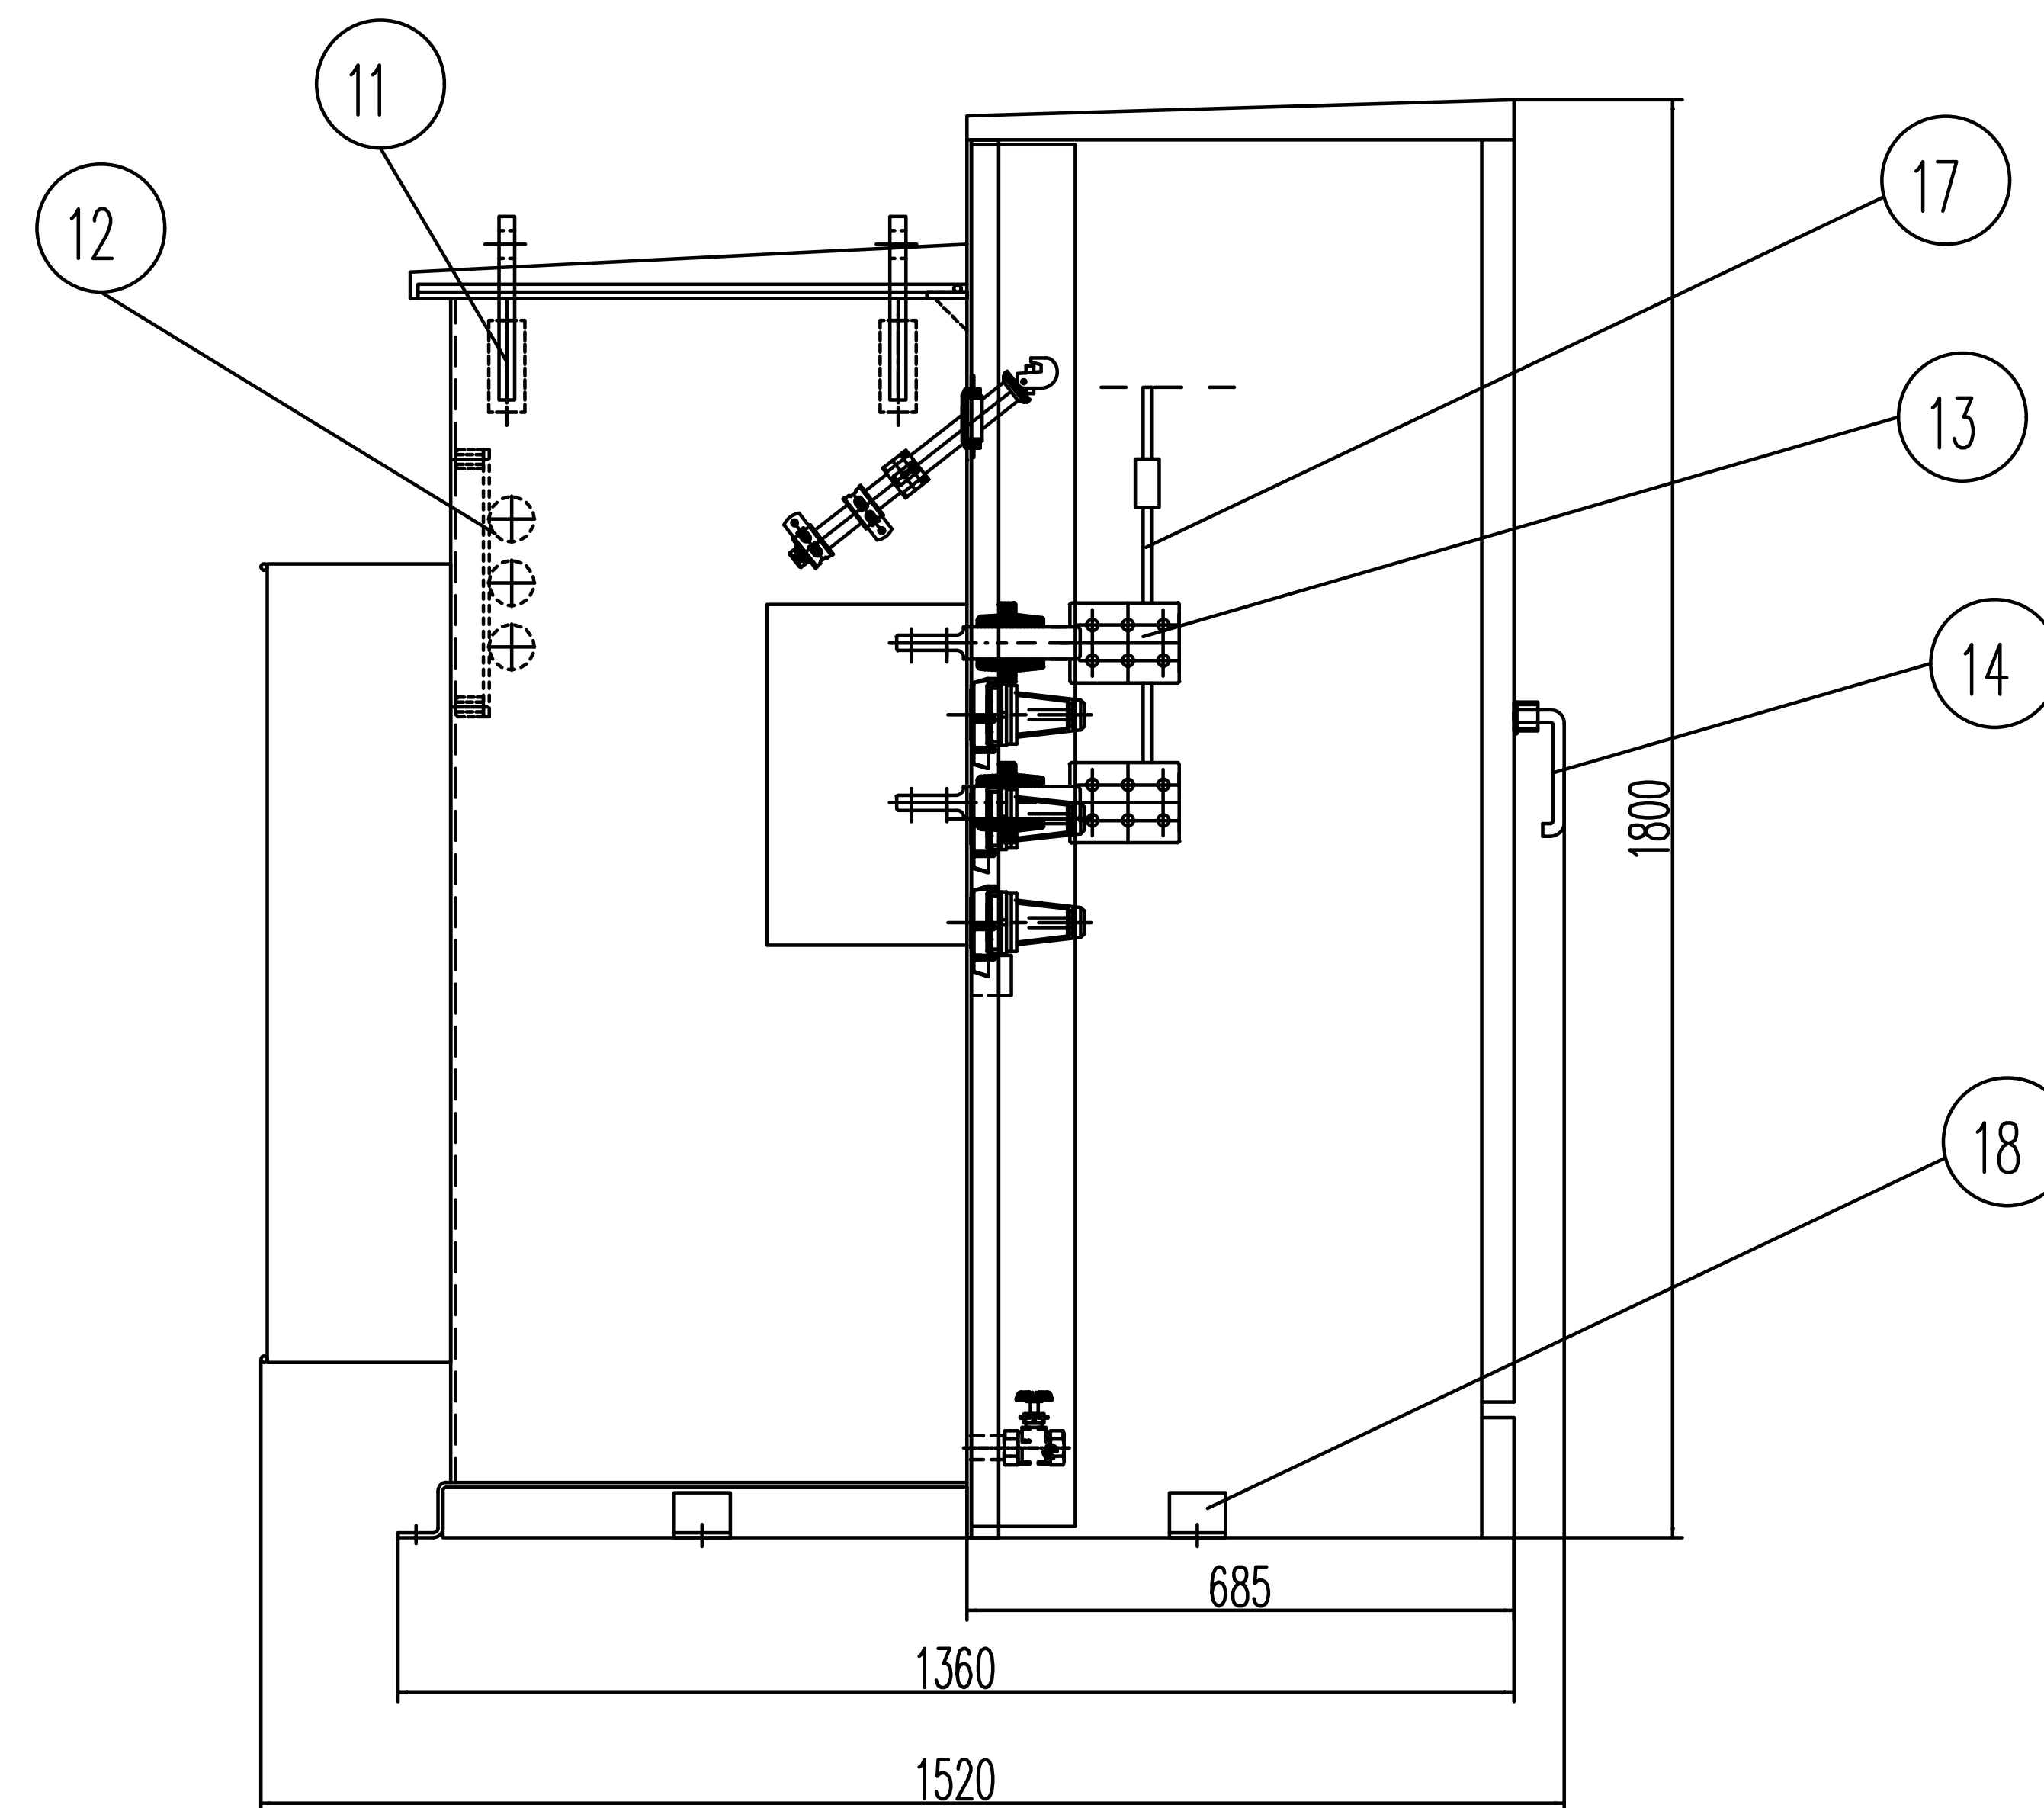
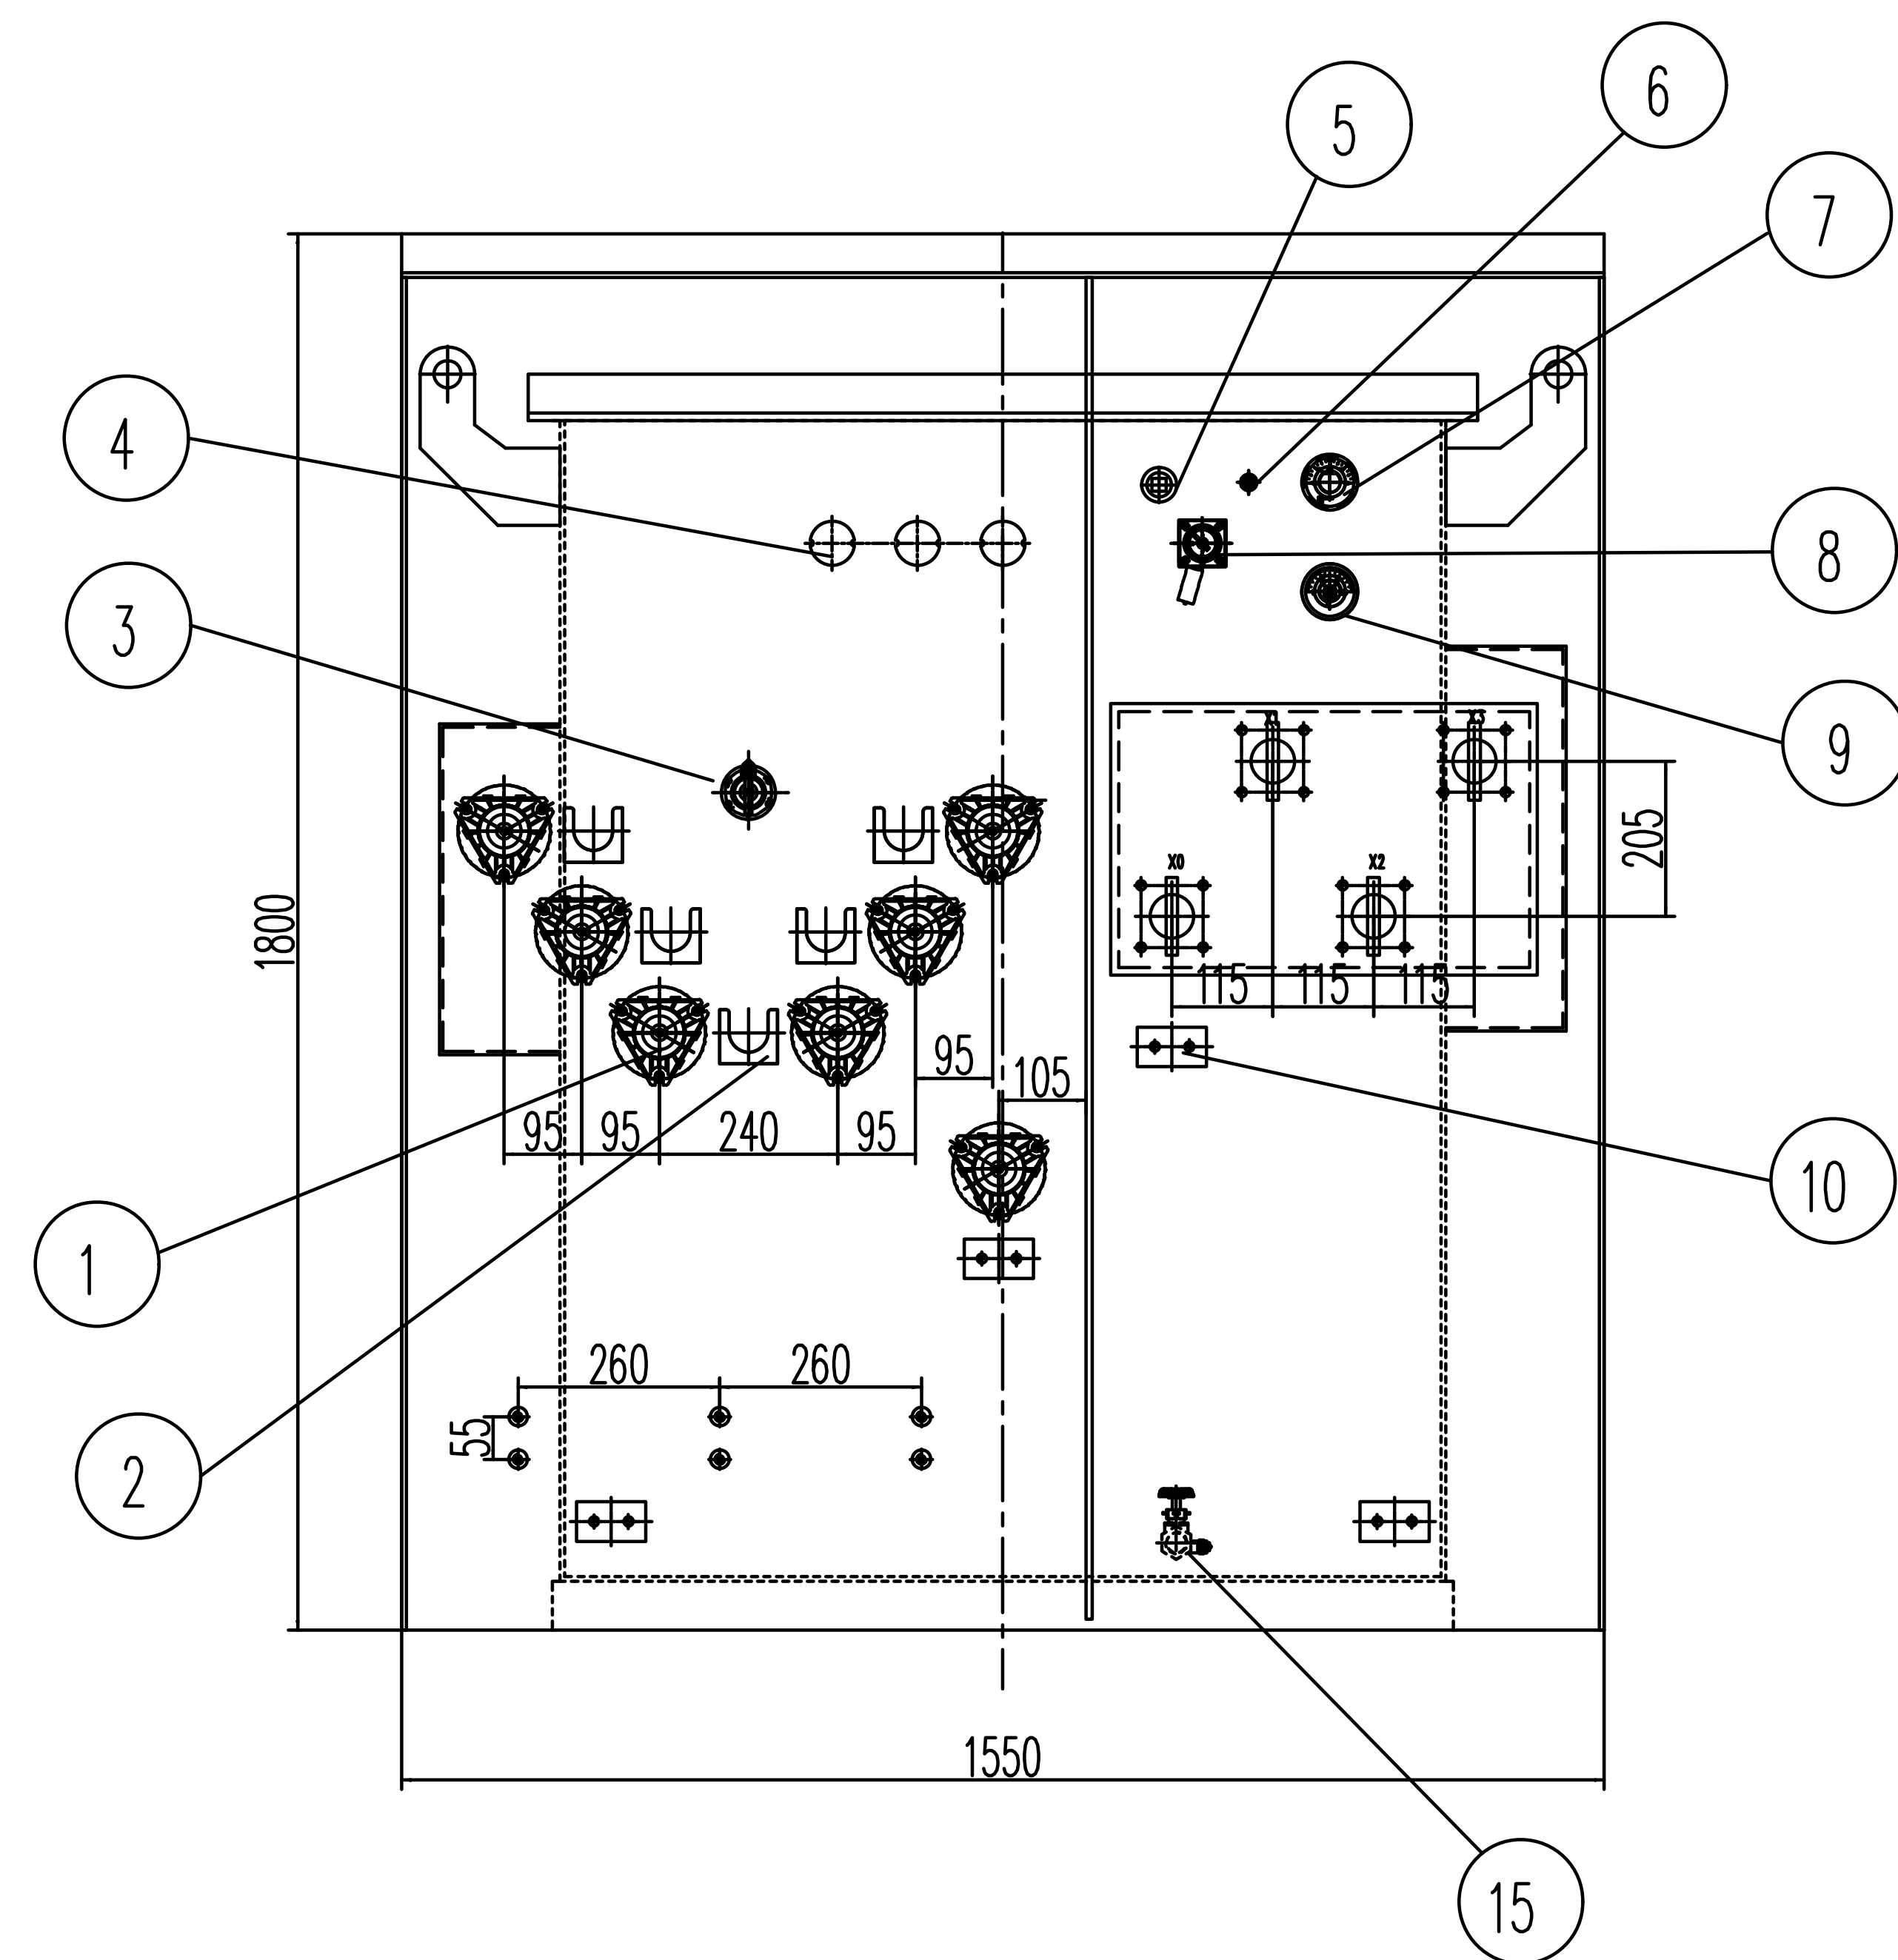
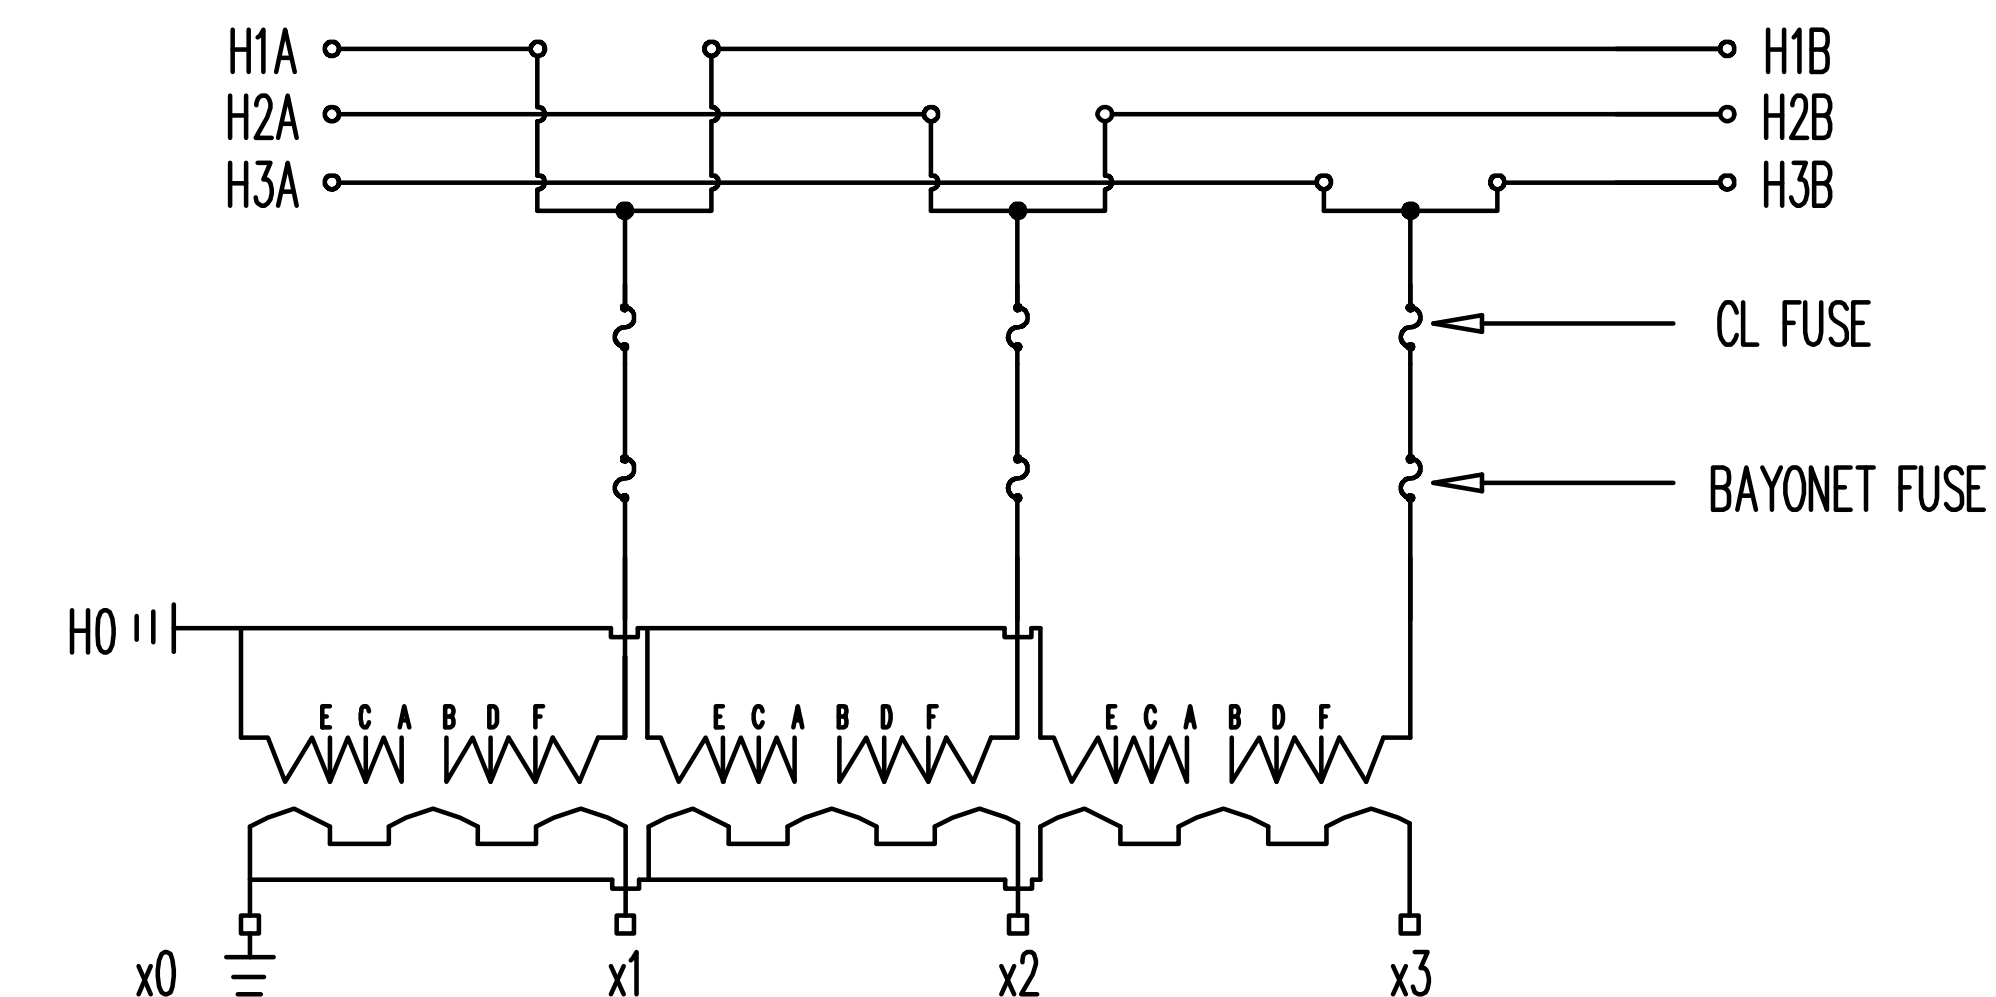


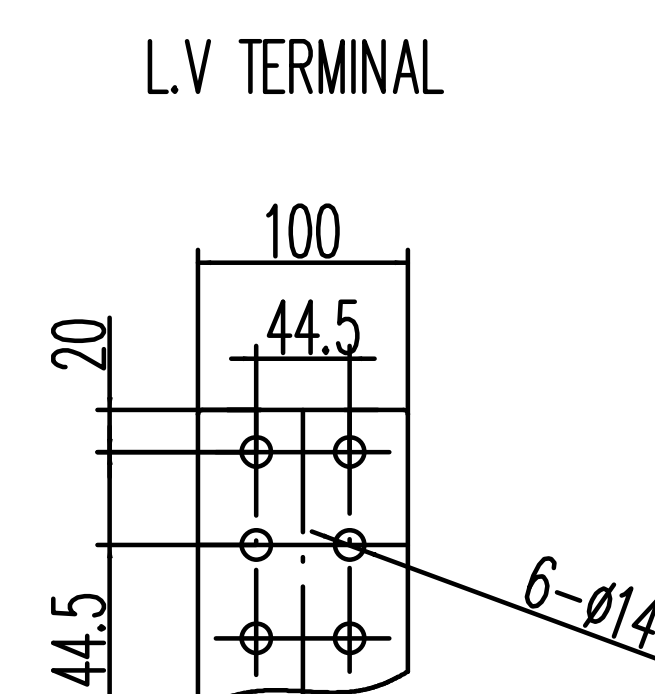


ITEM	WEIGHT(LBS)
CORE WEIGHT	1565 LBS
TOTAL OIL WEIGHT	1280 LBS
TOTAL WEIGHT	4350 LBS

TECHNICAL DATA	
RATING	300kVA
PRIMARY VOLTAGE(V)	12470DELTA
SECONDARY VOLTAGE(V)	480GrdY/277
FREQUENCY	60Hz
VECTOR GROUP	YNyn0
CONDUCTOR	ALUMINUM
PRIMARY BIL VOLTAGE	95kV
SECONDARY BIL VOLTAGE	30kV
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65℃
LOAD LOSS AT RATED VOLTAGE	3300 W
NO LOAD LOSSES	430 W
IMPEDANCE	3.5-4.5%
ALTITUDE	≤1000m
COLOR	MUNSELL NO.7.0 GY 3.2/1.5
CORE FORM	THREE-PHASE THREE-COLUMN

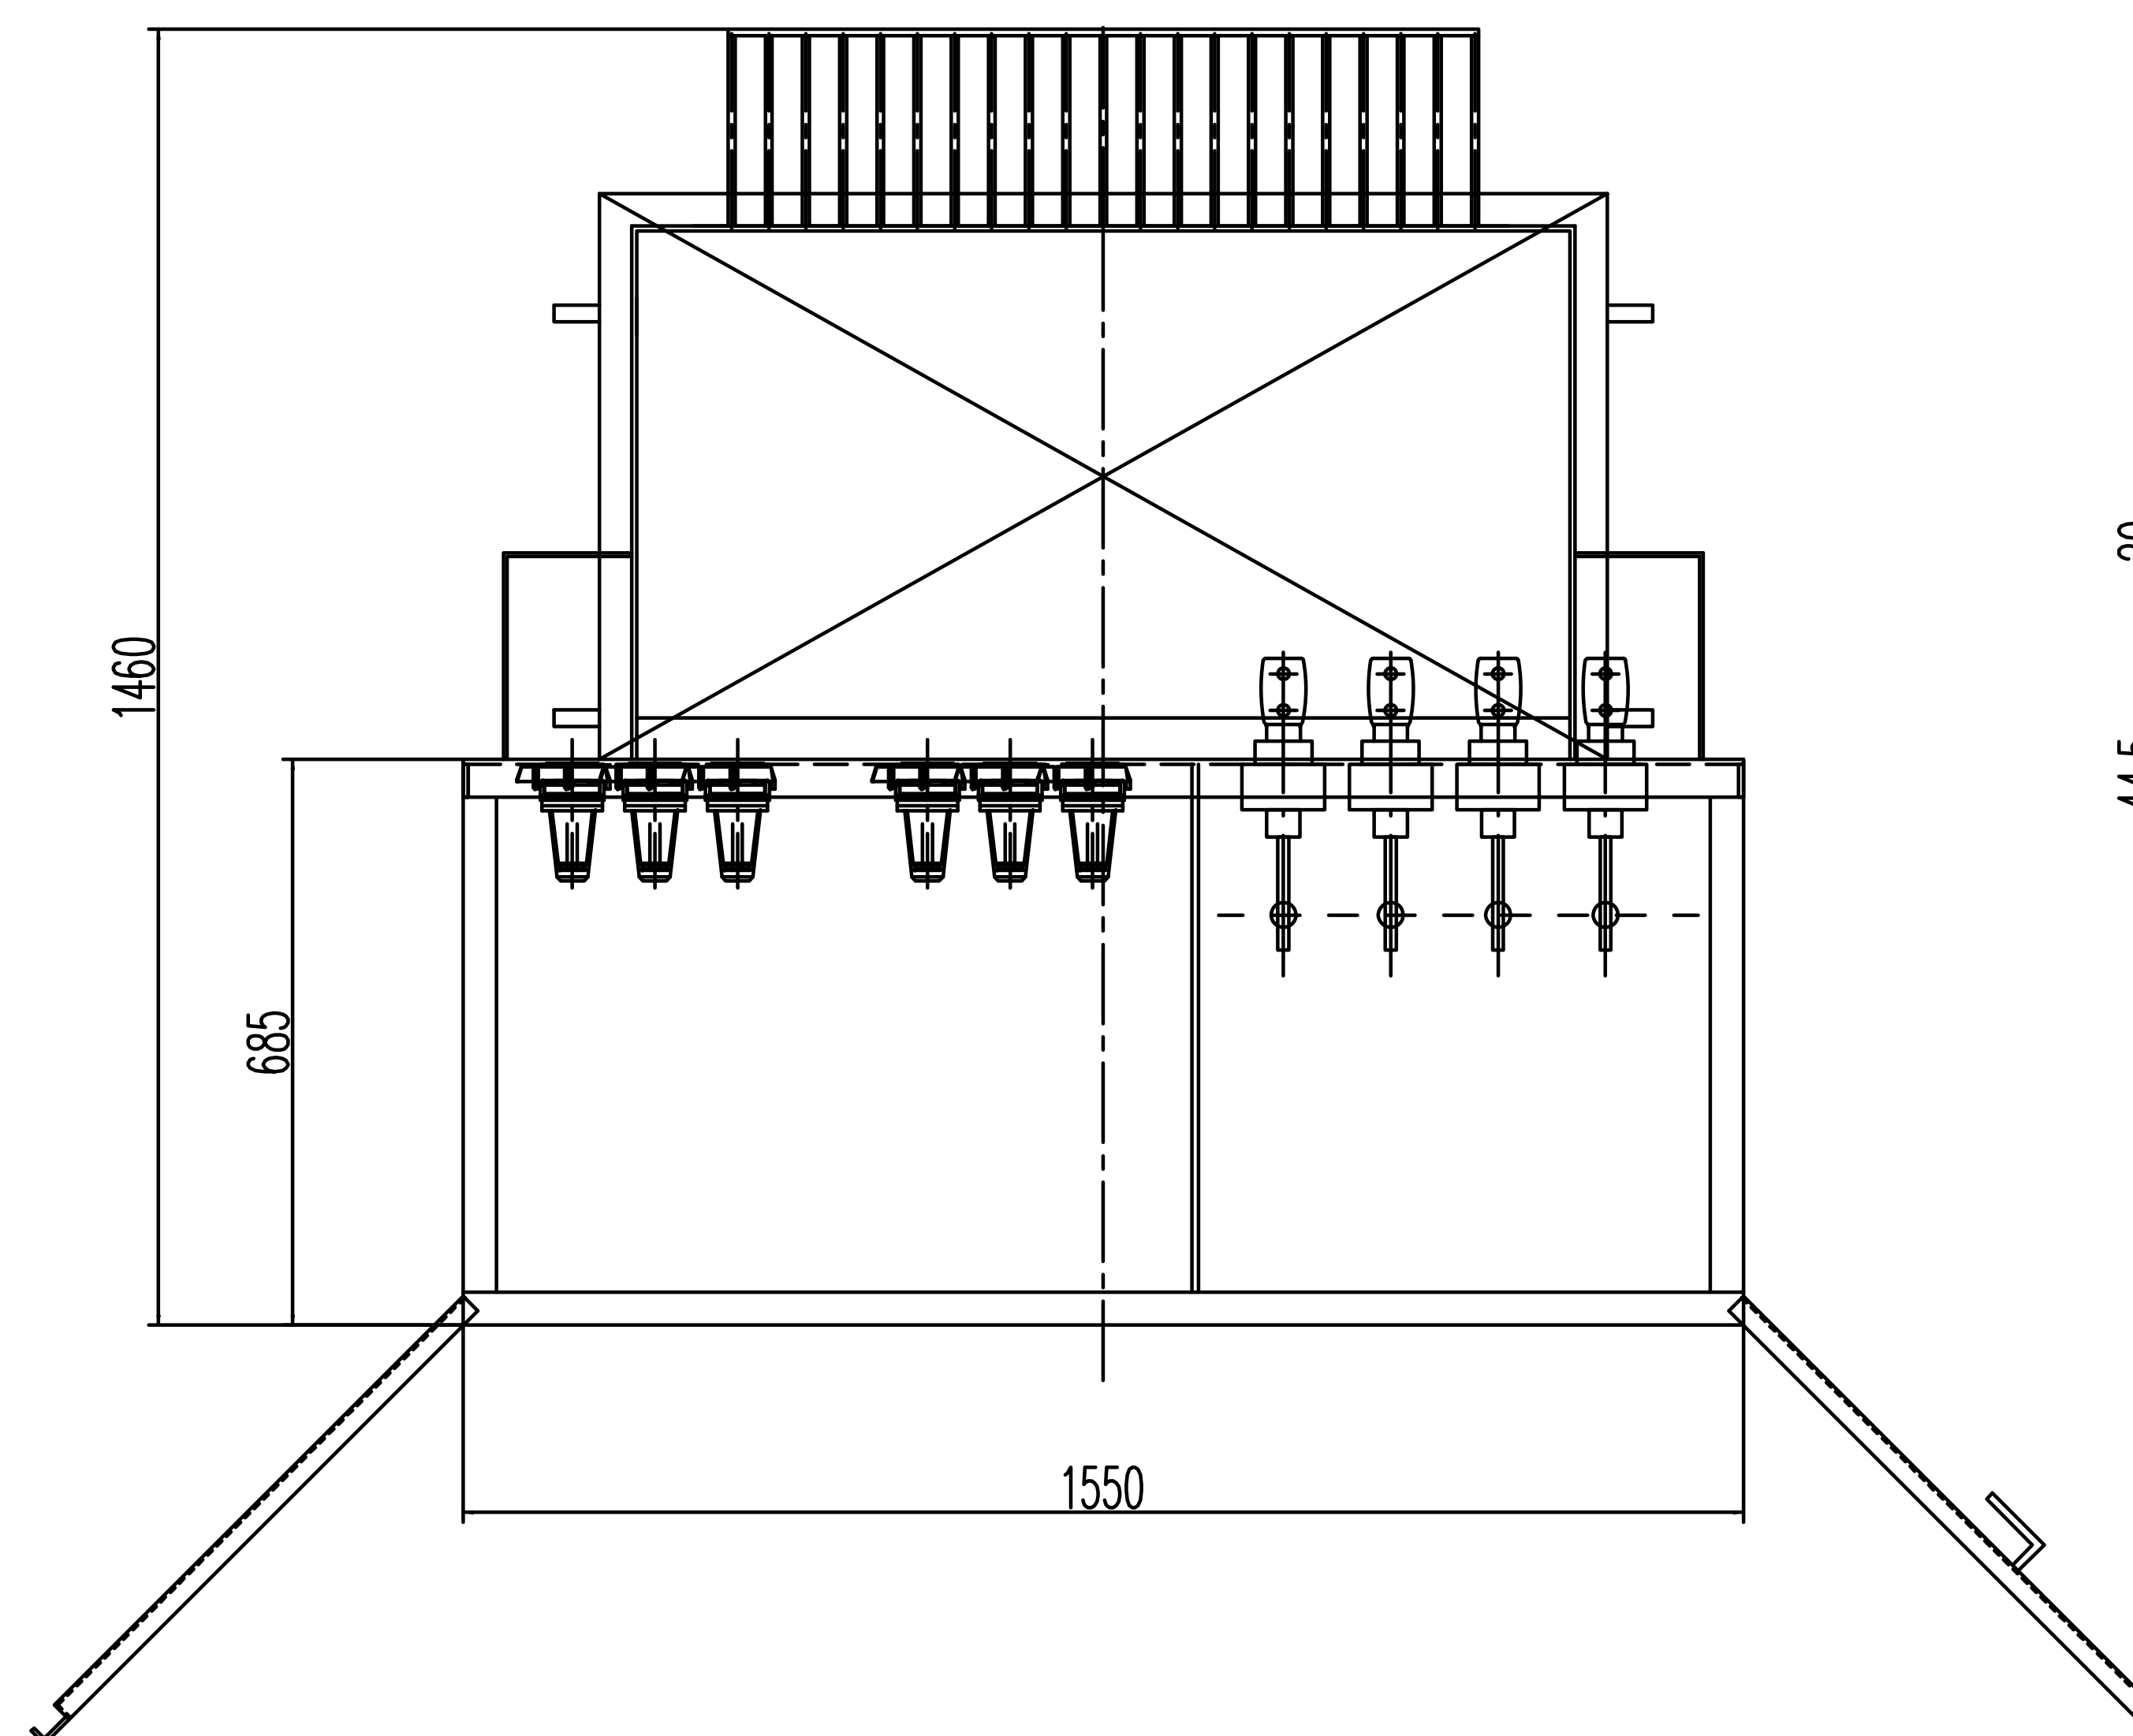

ALL DIMENSION DEVIATIONS: $\pm 10\%$

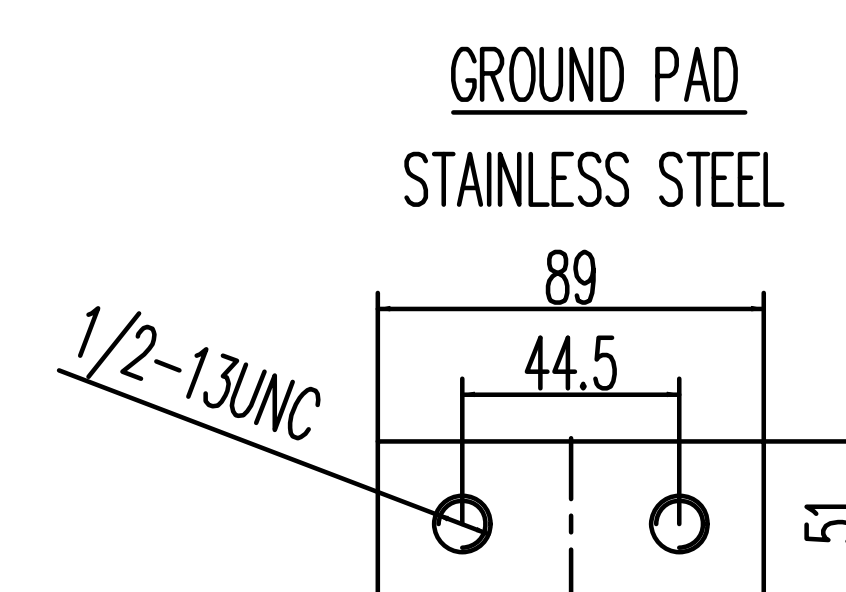

18	CONNECTED STEEL-PLATE	4
17	BUSHING SPADE SUPPORT	4
16	NAMEPLATE	2
15	DRAIN VALVE	1
14	DOOR HANDLE	1
13	LV BUSHING WITH STAINLESS STEEL BASE	4
12	BACK UP FUSE	3
11	LIFTING LUG	4
10	GROUND STEEL PADS	4
9	OIL TEMPERATURE GAUGE	1
8	OIL LEVEL GAUGE	1
7	VACCUM PRESSURE GAUGE	1
6	PRESSURE RELIEF VALVE	1
5	FILL PLUG	1
4	BAYONET FUSE	3
3	TAP CHANGER	1
2	PARKING STAND BRACKET	5
1	HV BUSHING WITH 200AMP BUSHING WELL INSERTS	7
ITEM	DESCRIPTION	QTY

ZGSL-H-300/12.47-0.48
PAD MOUNTED TRANSFORMER

OUTLINE DRAWING

Eaglerise Electric &
Electronic (China) Co., Ltd.