
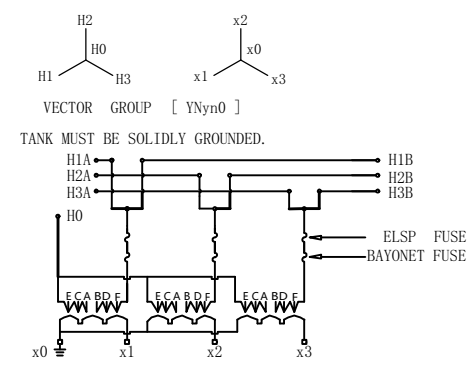

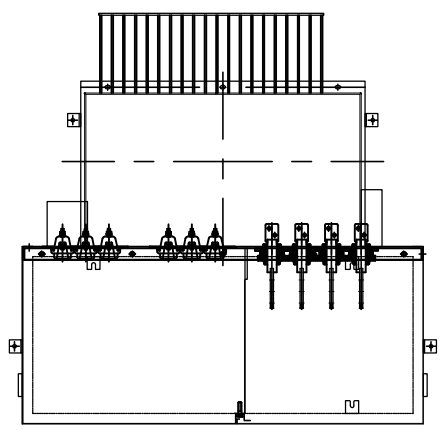
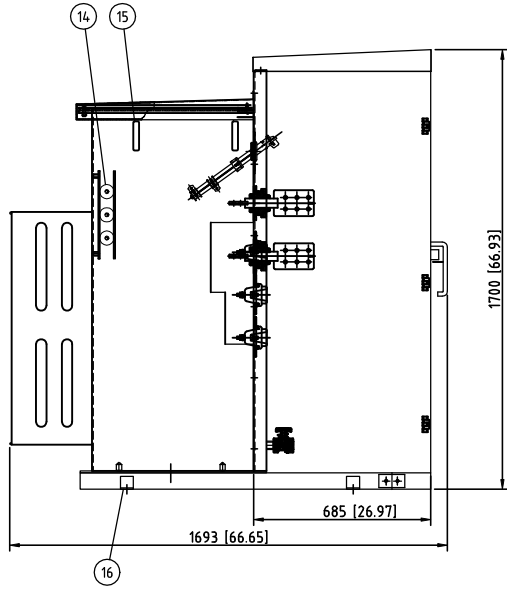


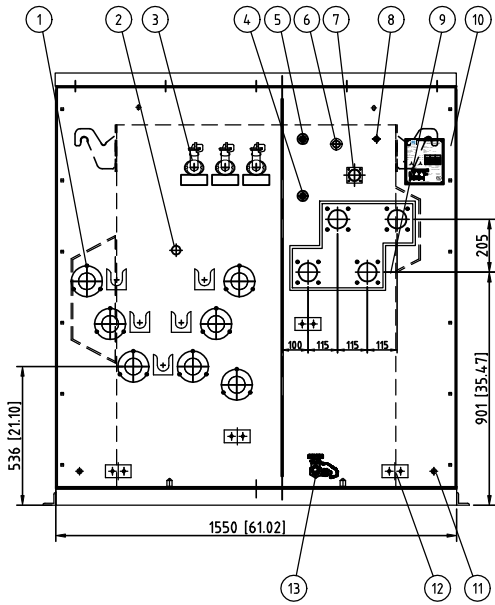

ITEM	WEIGHT(LBS)
Body weight	1680
Tank & accesories	1870
Total oil weight	1300
Total weight	4850

Rating	kVA	500
Phase		3
Frequency	Hz	60
H.V.	V	12470Y/7200
L.V.	V	480Y/277
Vector Group		YNyn0
Core Limbs		★ 3 legged core
Material Of Winding		aluminium
No Load Loss	W	600(+10%)
Load Loss	W	5410 (+6%)
Impedance	%	5.0 (±7.5%)
Altitude		<1000m
Insulating Oil		biodegradable oil (FR3)

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	Hv bushing (TGZ-15/200)	7
2	Tap changer (WSL 63/20-6×5	1
3	Bayonet fuse (4000358C10M)	3
4	Oil thermometer (BWS-70)	1
5	Vacuum manometer (YZ-70)	1
6	Pocket	1
7	Oil-level indicator (UHZ-01)	1
8	Hand valve (YSF)	1
9	Lv bushing (1.0KV 1600A)	4
10	Nameplate	1
11	Ground terminal	3
12	2-hole horiz nema grd pad	5
13	Drain valve	1
14	Elsf fuse (CBUC15100C100)	3
15	Lifting lug	4
16	Connected steel-plate	4
17		
18		

TYPE

ZGSL-500/12.47/0.48

DWG. NAME

General Assembly Drawing

DRAWN

Mike W.

CHECKED

Iris J.

CHECKED

Ella W.

APPROVED

Sam S.

FIRST ANGLE PROJECTION

SCALE

1

POWER TRANSFORMER

JIEZOU POWER

REV. NO.

0

CHANGE

1.710.3527.1