

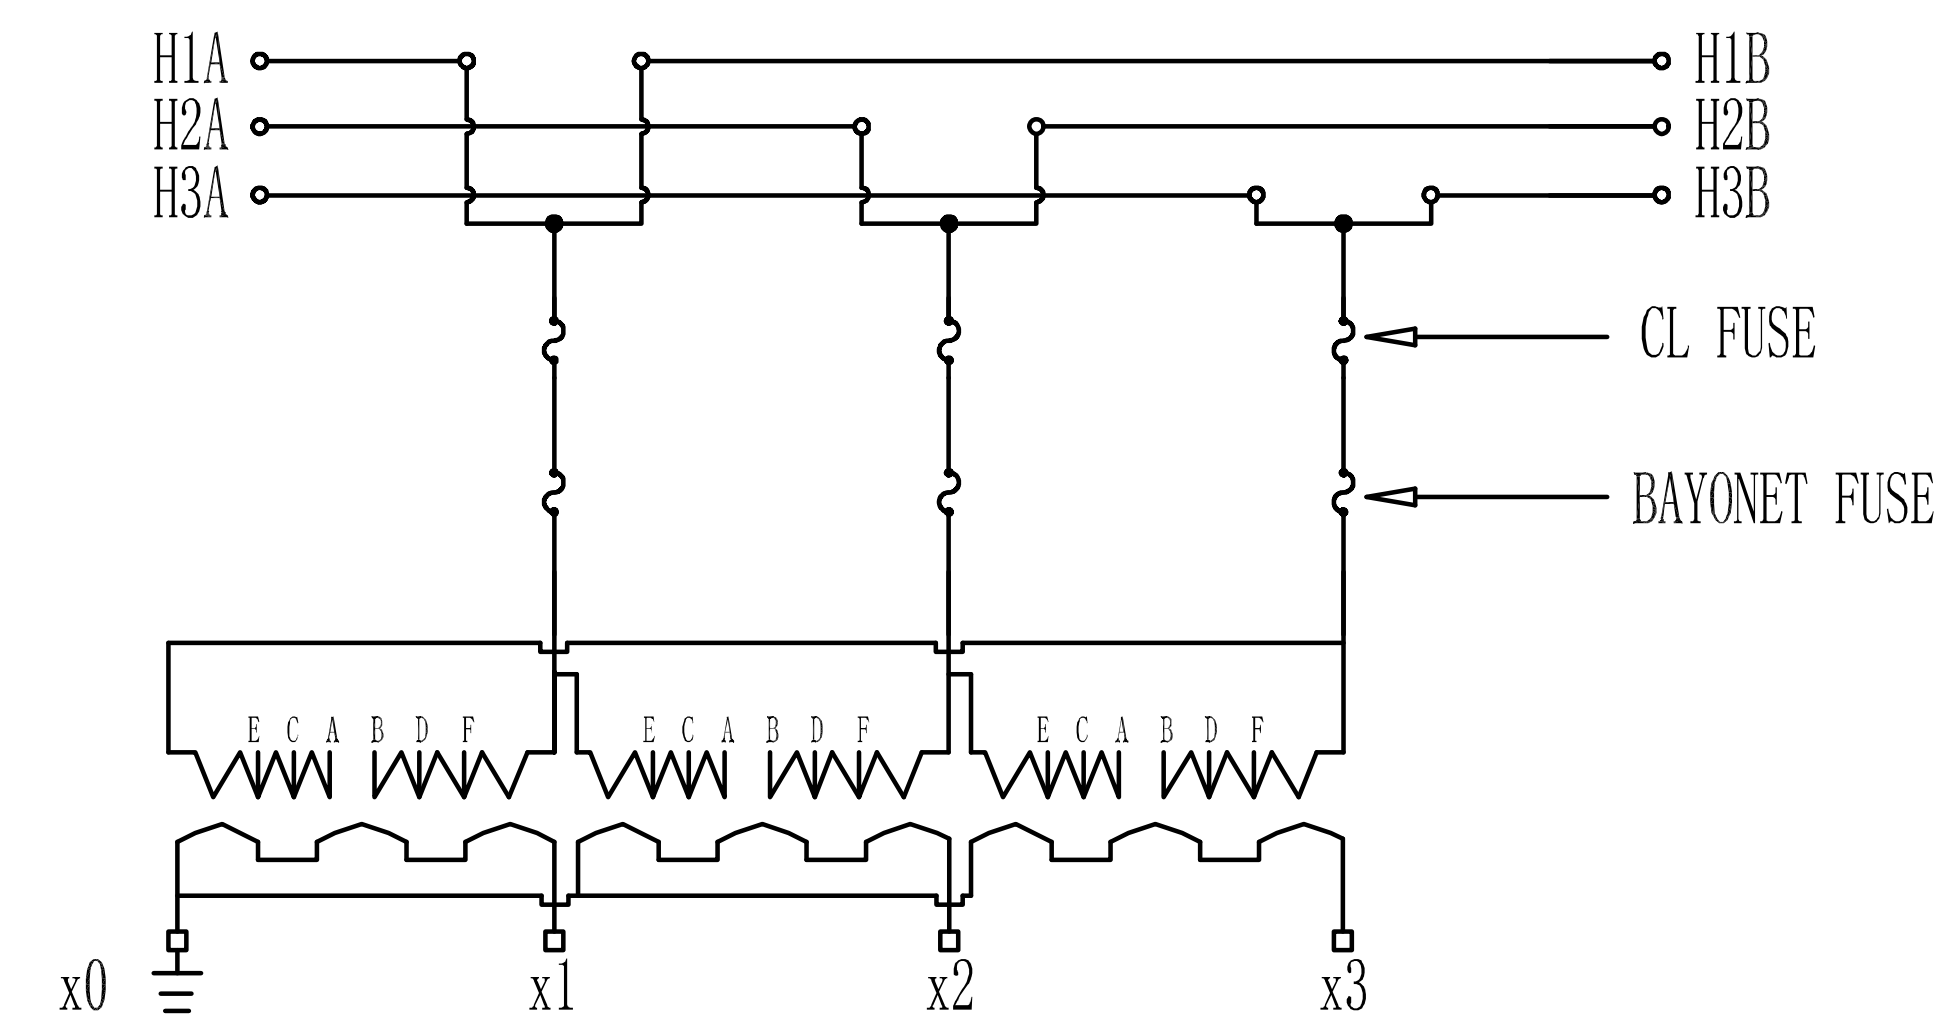
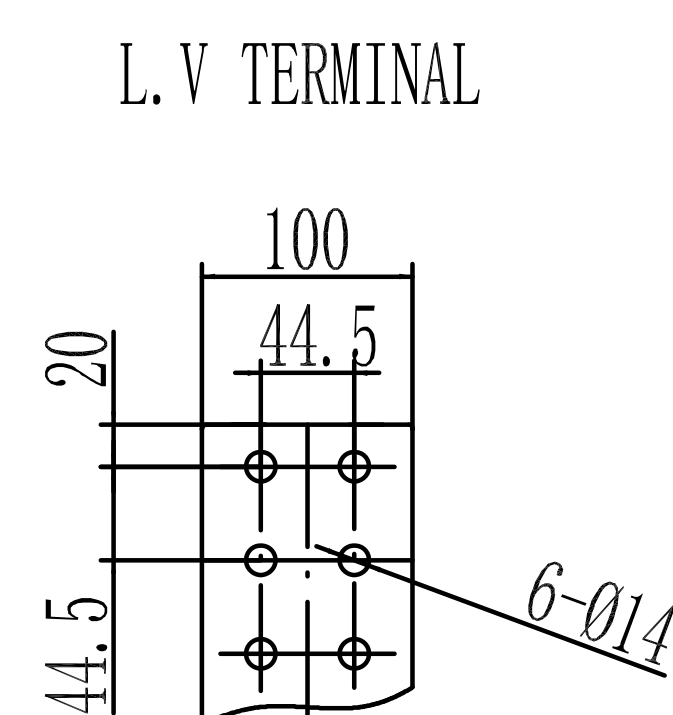
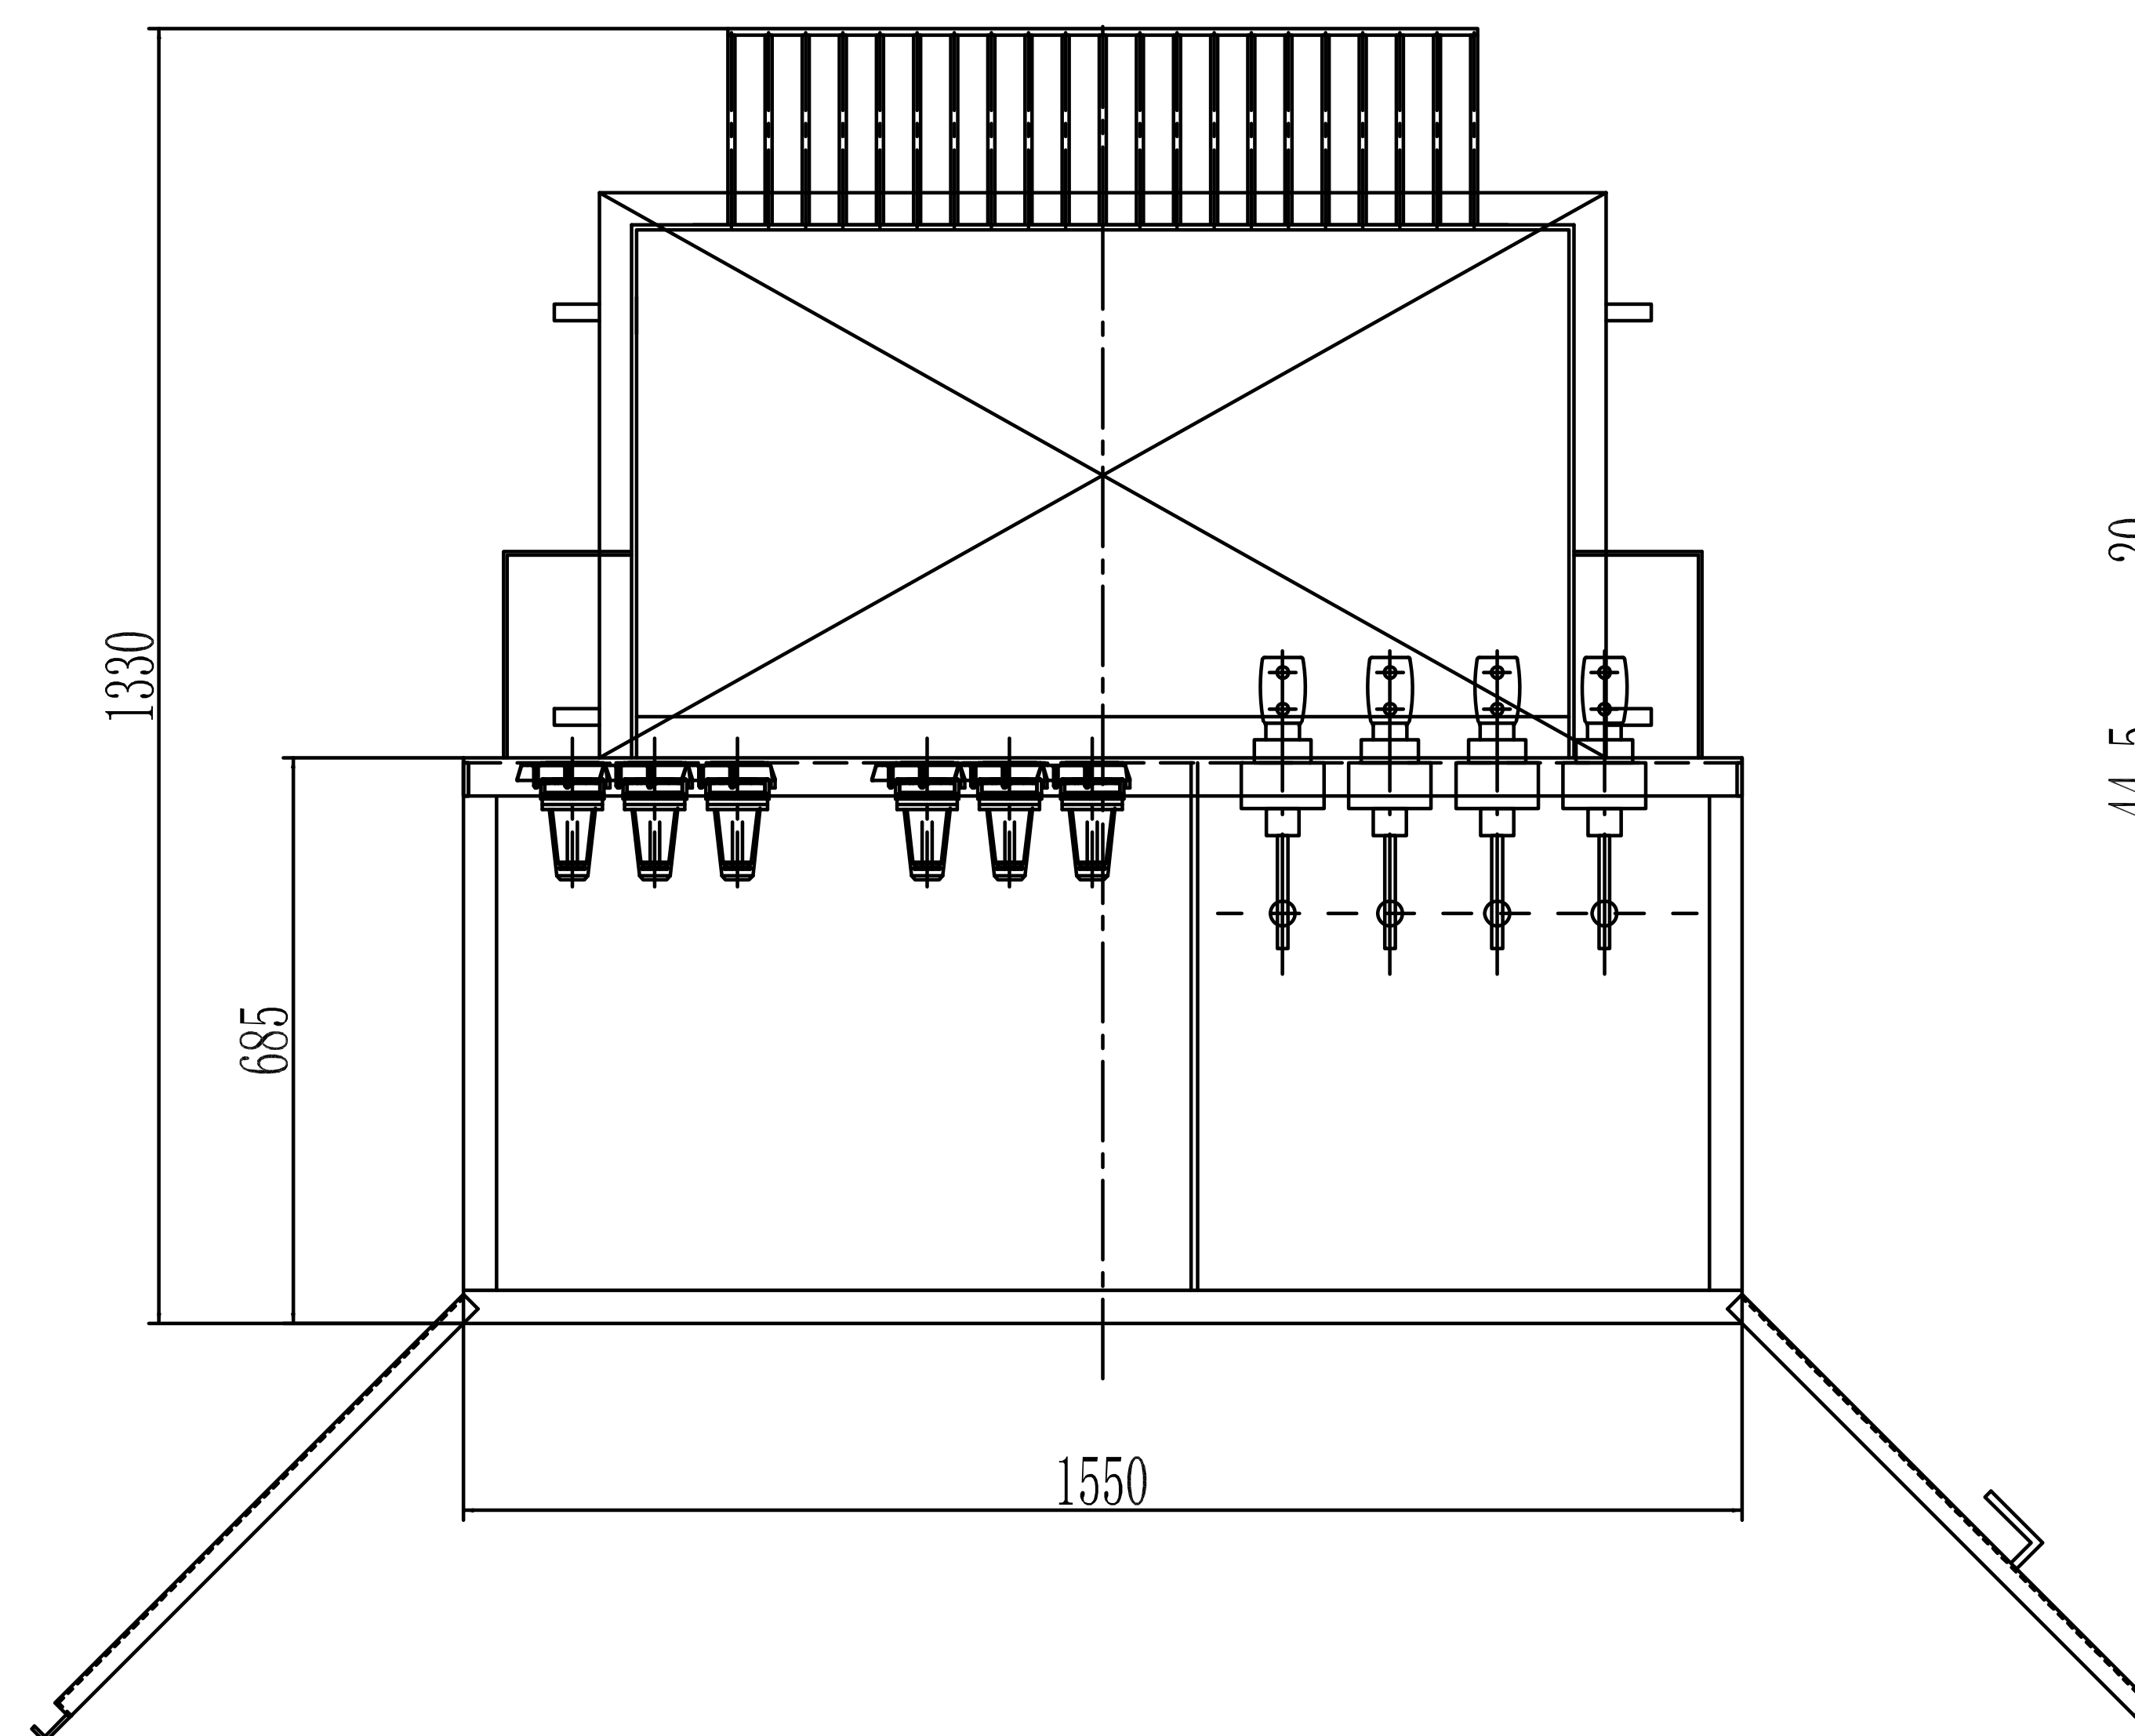
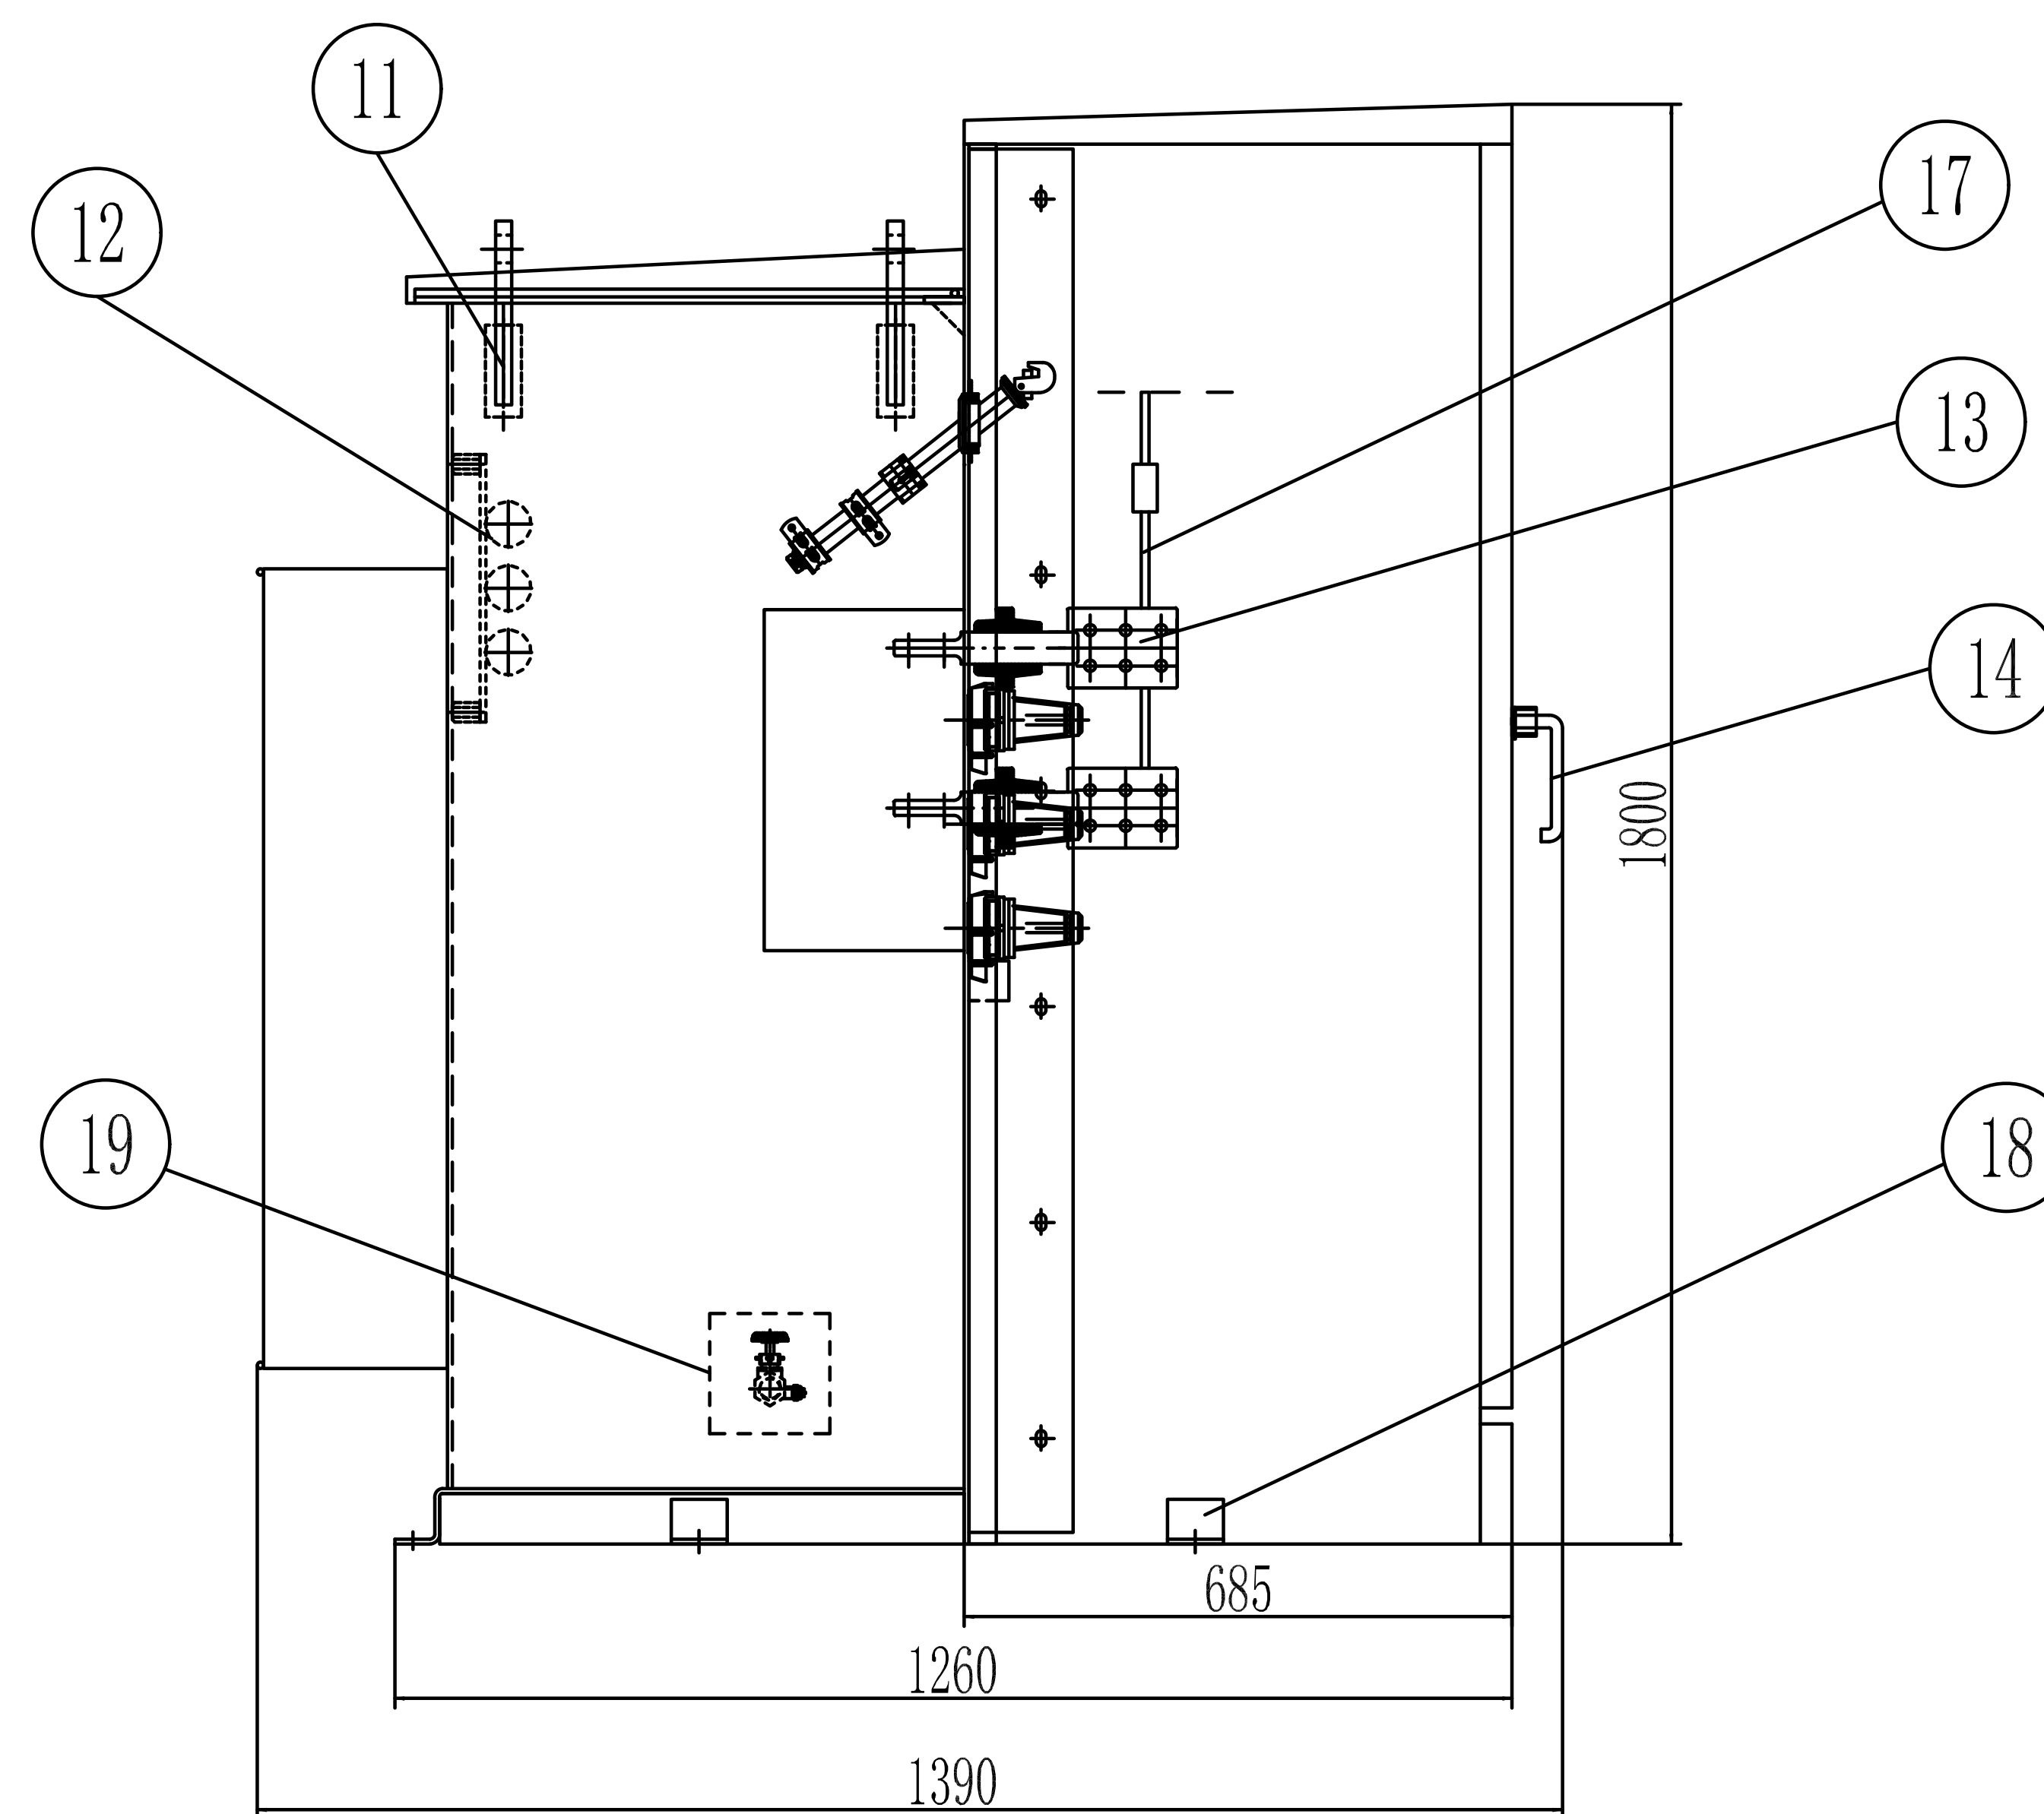


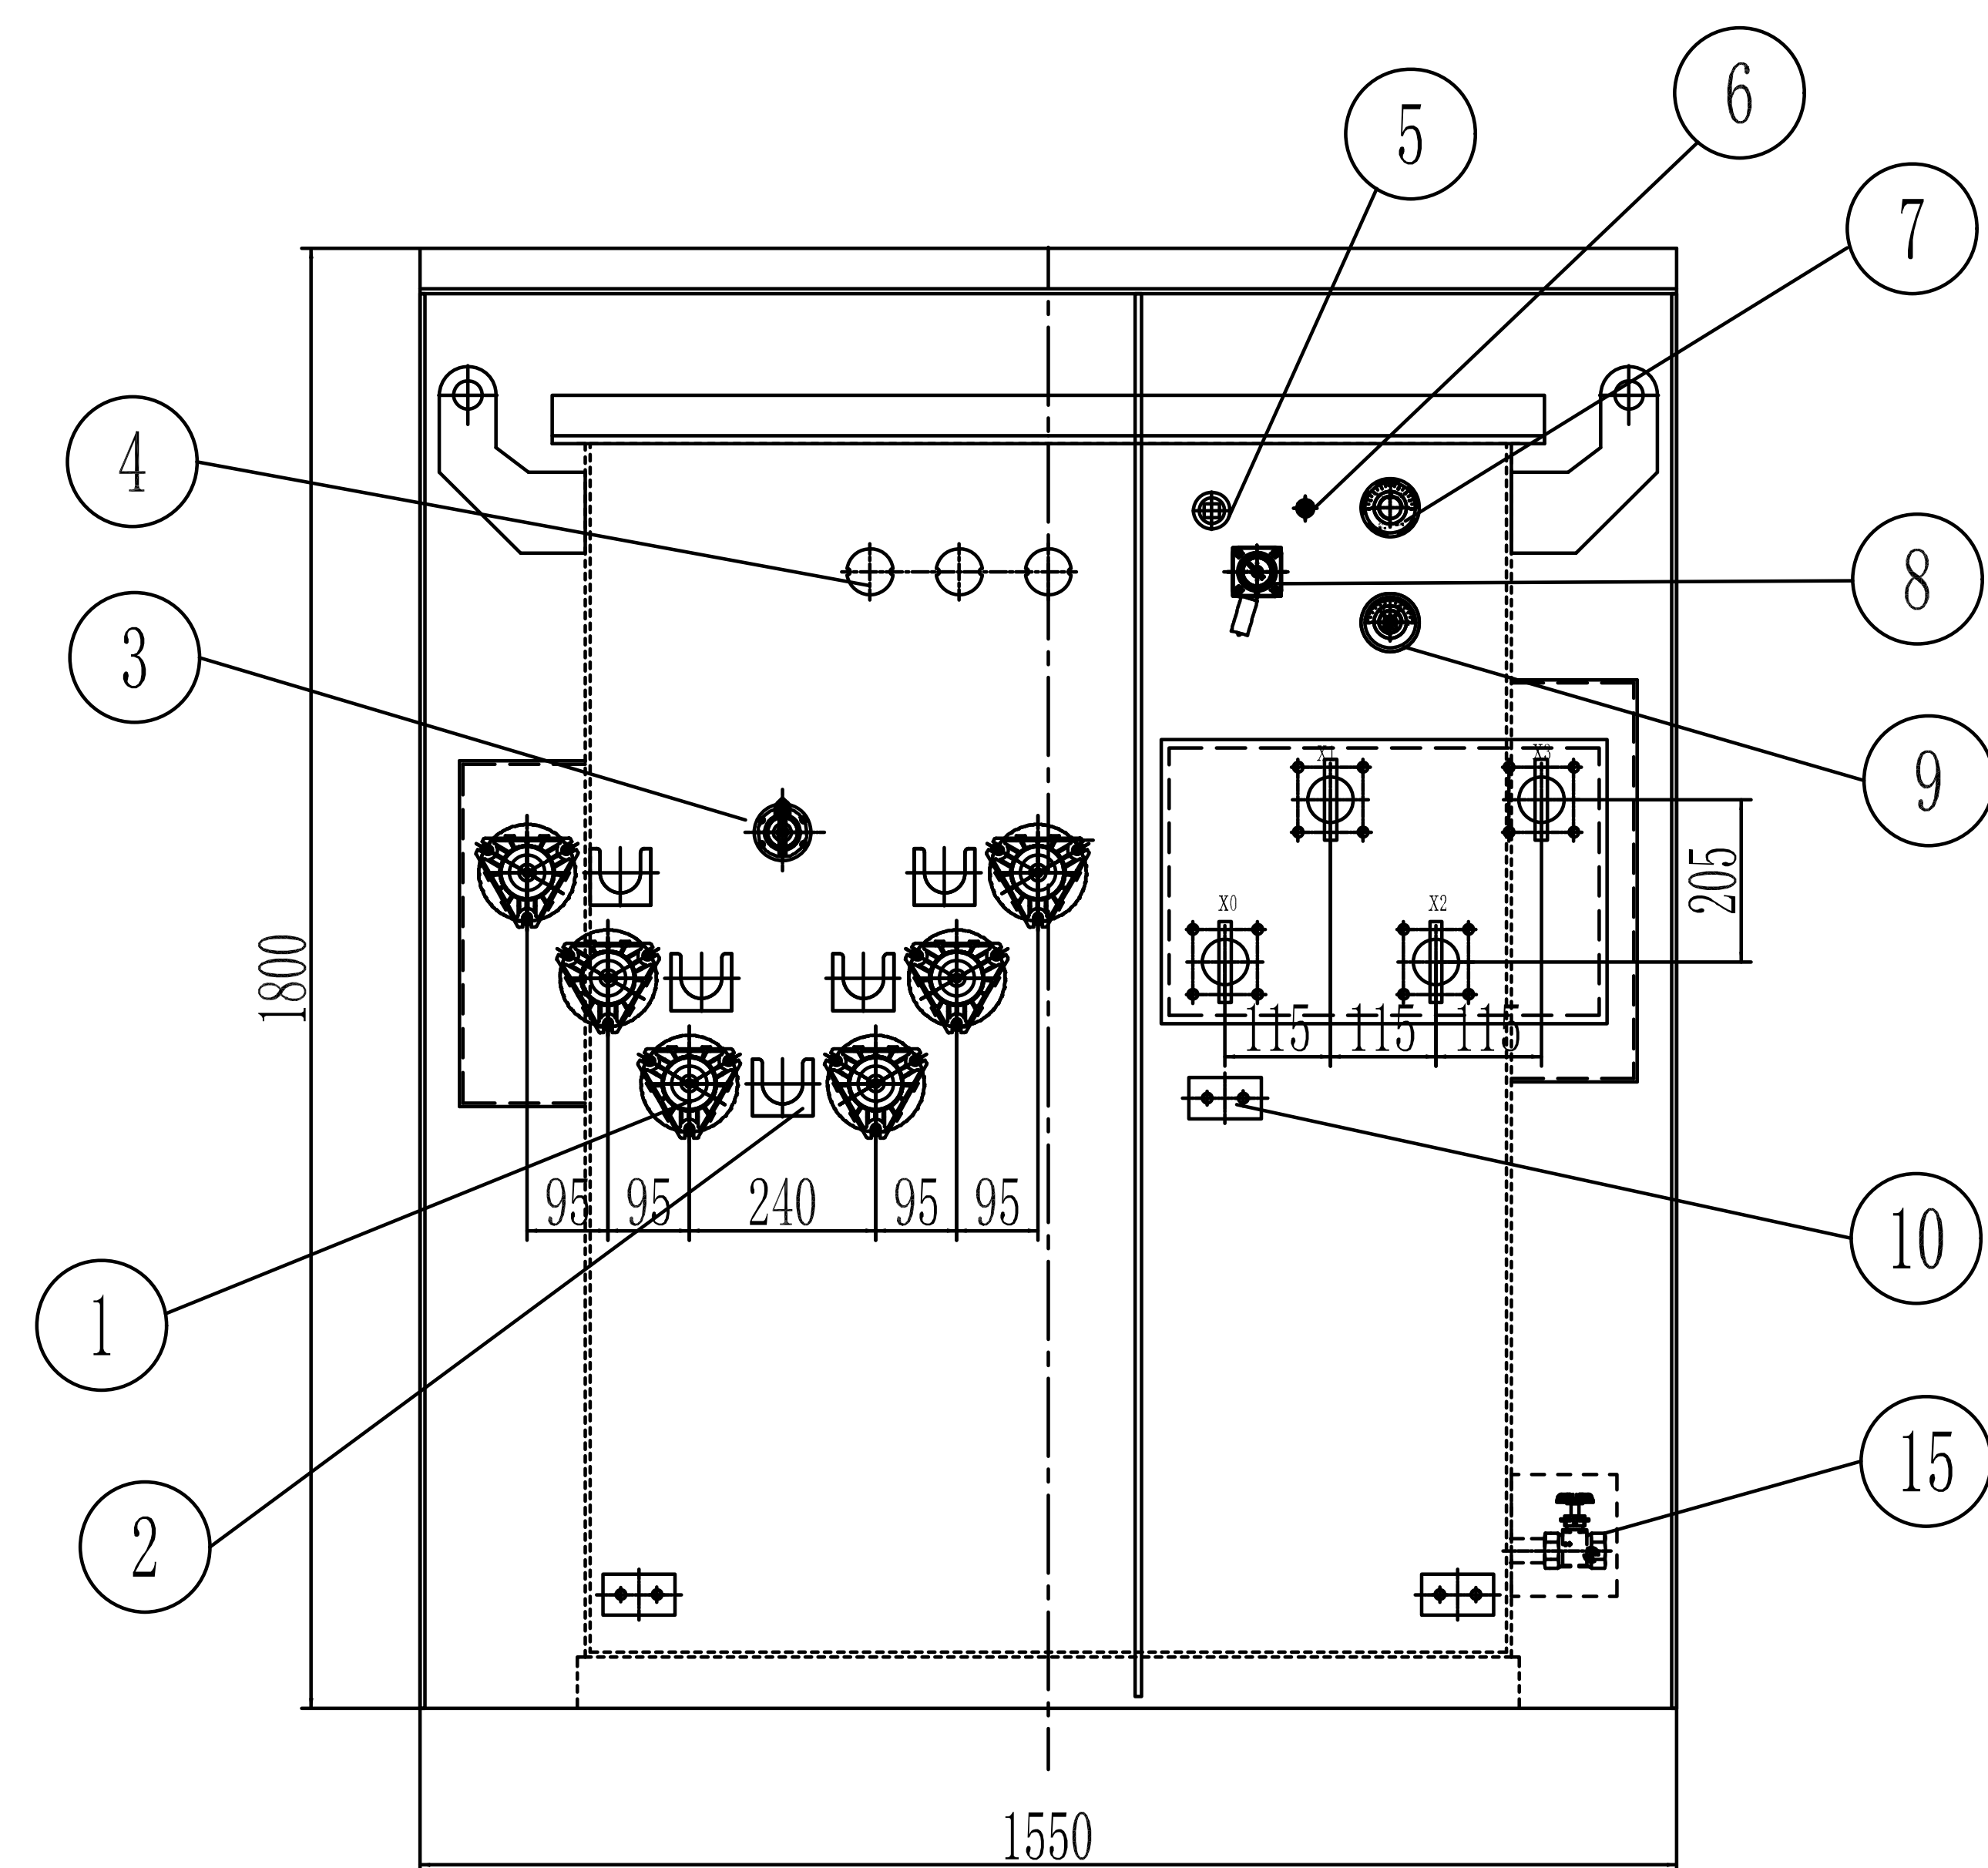

ALL DIMENSION DEVIATIONS: $\pm 10\%$

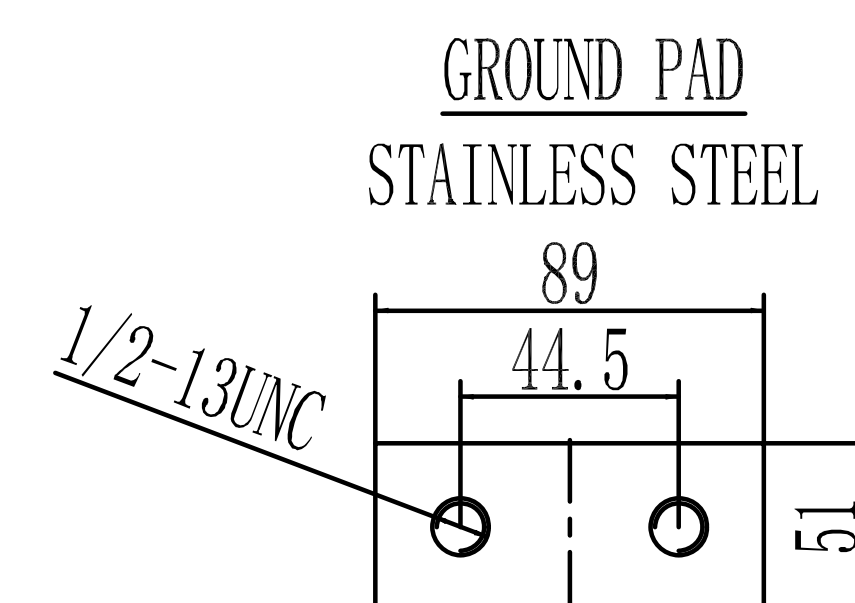

ITEM	WEIGHT (LBS)
CORE WEIGHT	1300 LBS
TOTAL OIL WEIGHT	1060 LBS
TOTAL WEIGHT	3560 LBS

TECHNICAL DATA	
RATING	225kVA
PRIMARY VOLTAGE(V)	13200DELTA
SECONDARY VOLTAGE(V)	480GrΔY/277
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
CONDUCTOR	ALUMINUM
PRIMARY BIL VOLTAGE	95kV
SECONDARY BIL VOLTAGE	30kV
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	2900 W
NO LOAD LOSSES	350 W
IMPEDANCE	3.5-4.5%
ALTITUDE	≤1000m
COLOR	MUNSELL NO. 7.0 GY 3.2/1.5
CORE FORM	THREE-PHASE THREE-COLUMN

19	DRAIN VALVE LOCKABLE BOX	1
18	CONNECTED STEEL-PLATE	4
17	BUSHING SPADE SUPPORT	4
16	NAMEPLATE	2
15	DRAIN VALVE	1
14	DOOR HANDLE	1
13	LV BUSHING WITH STAINLESS STEEL BASE	4
12	BACK UP FUSE	3
11	LIFTING LUG	4
10	GROUND STEEL PADS	3
9	OIL TEMPERATURE GAUGE	1
8	OIL LEVEL GAUGE	1
7	VACCUM PRESSURE GAUGE	1
6	PRESSURE RELIEF VALVE	1
5	FILL PLUG	1
4	BAYONET FUSE	3
3	TAP CHANGER	1
2	PARKING STAND BRACKET	5
1	HV BUSHING WITH 200AMP BUSHING WELL INSERTS	6
ITEM	DESCRIPTION	QTY

ZGSL-H-225/13.2-0.48
PAD MOUNTED TRANSFORMER

OUTLINE DRAWING

Eaglerise Electric&
Electronic (China)Co.,Ltd.