

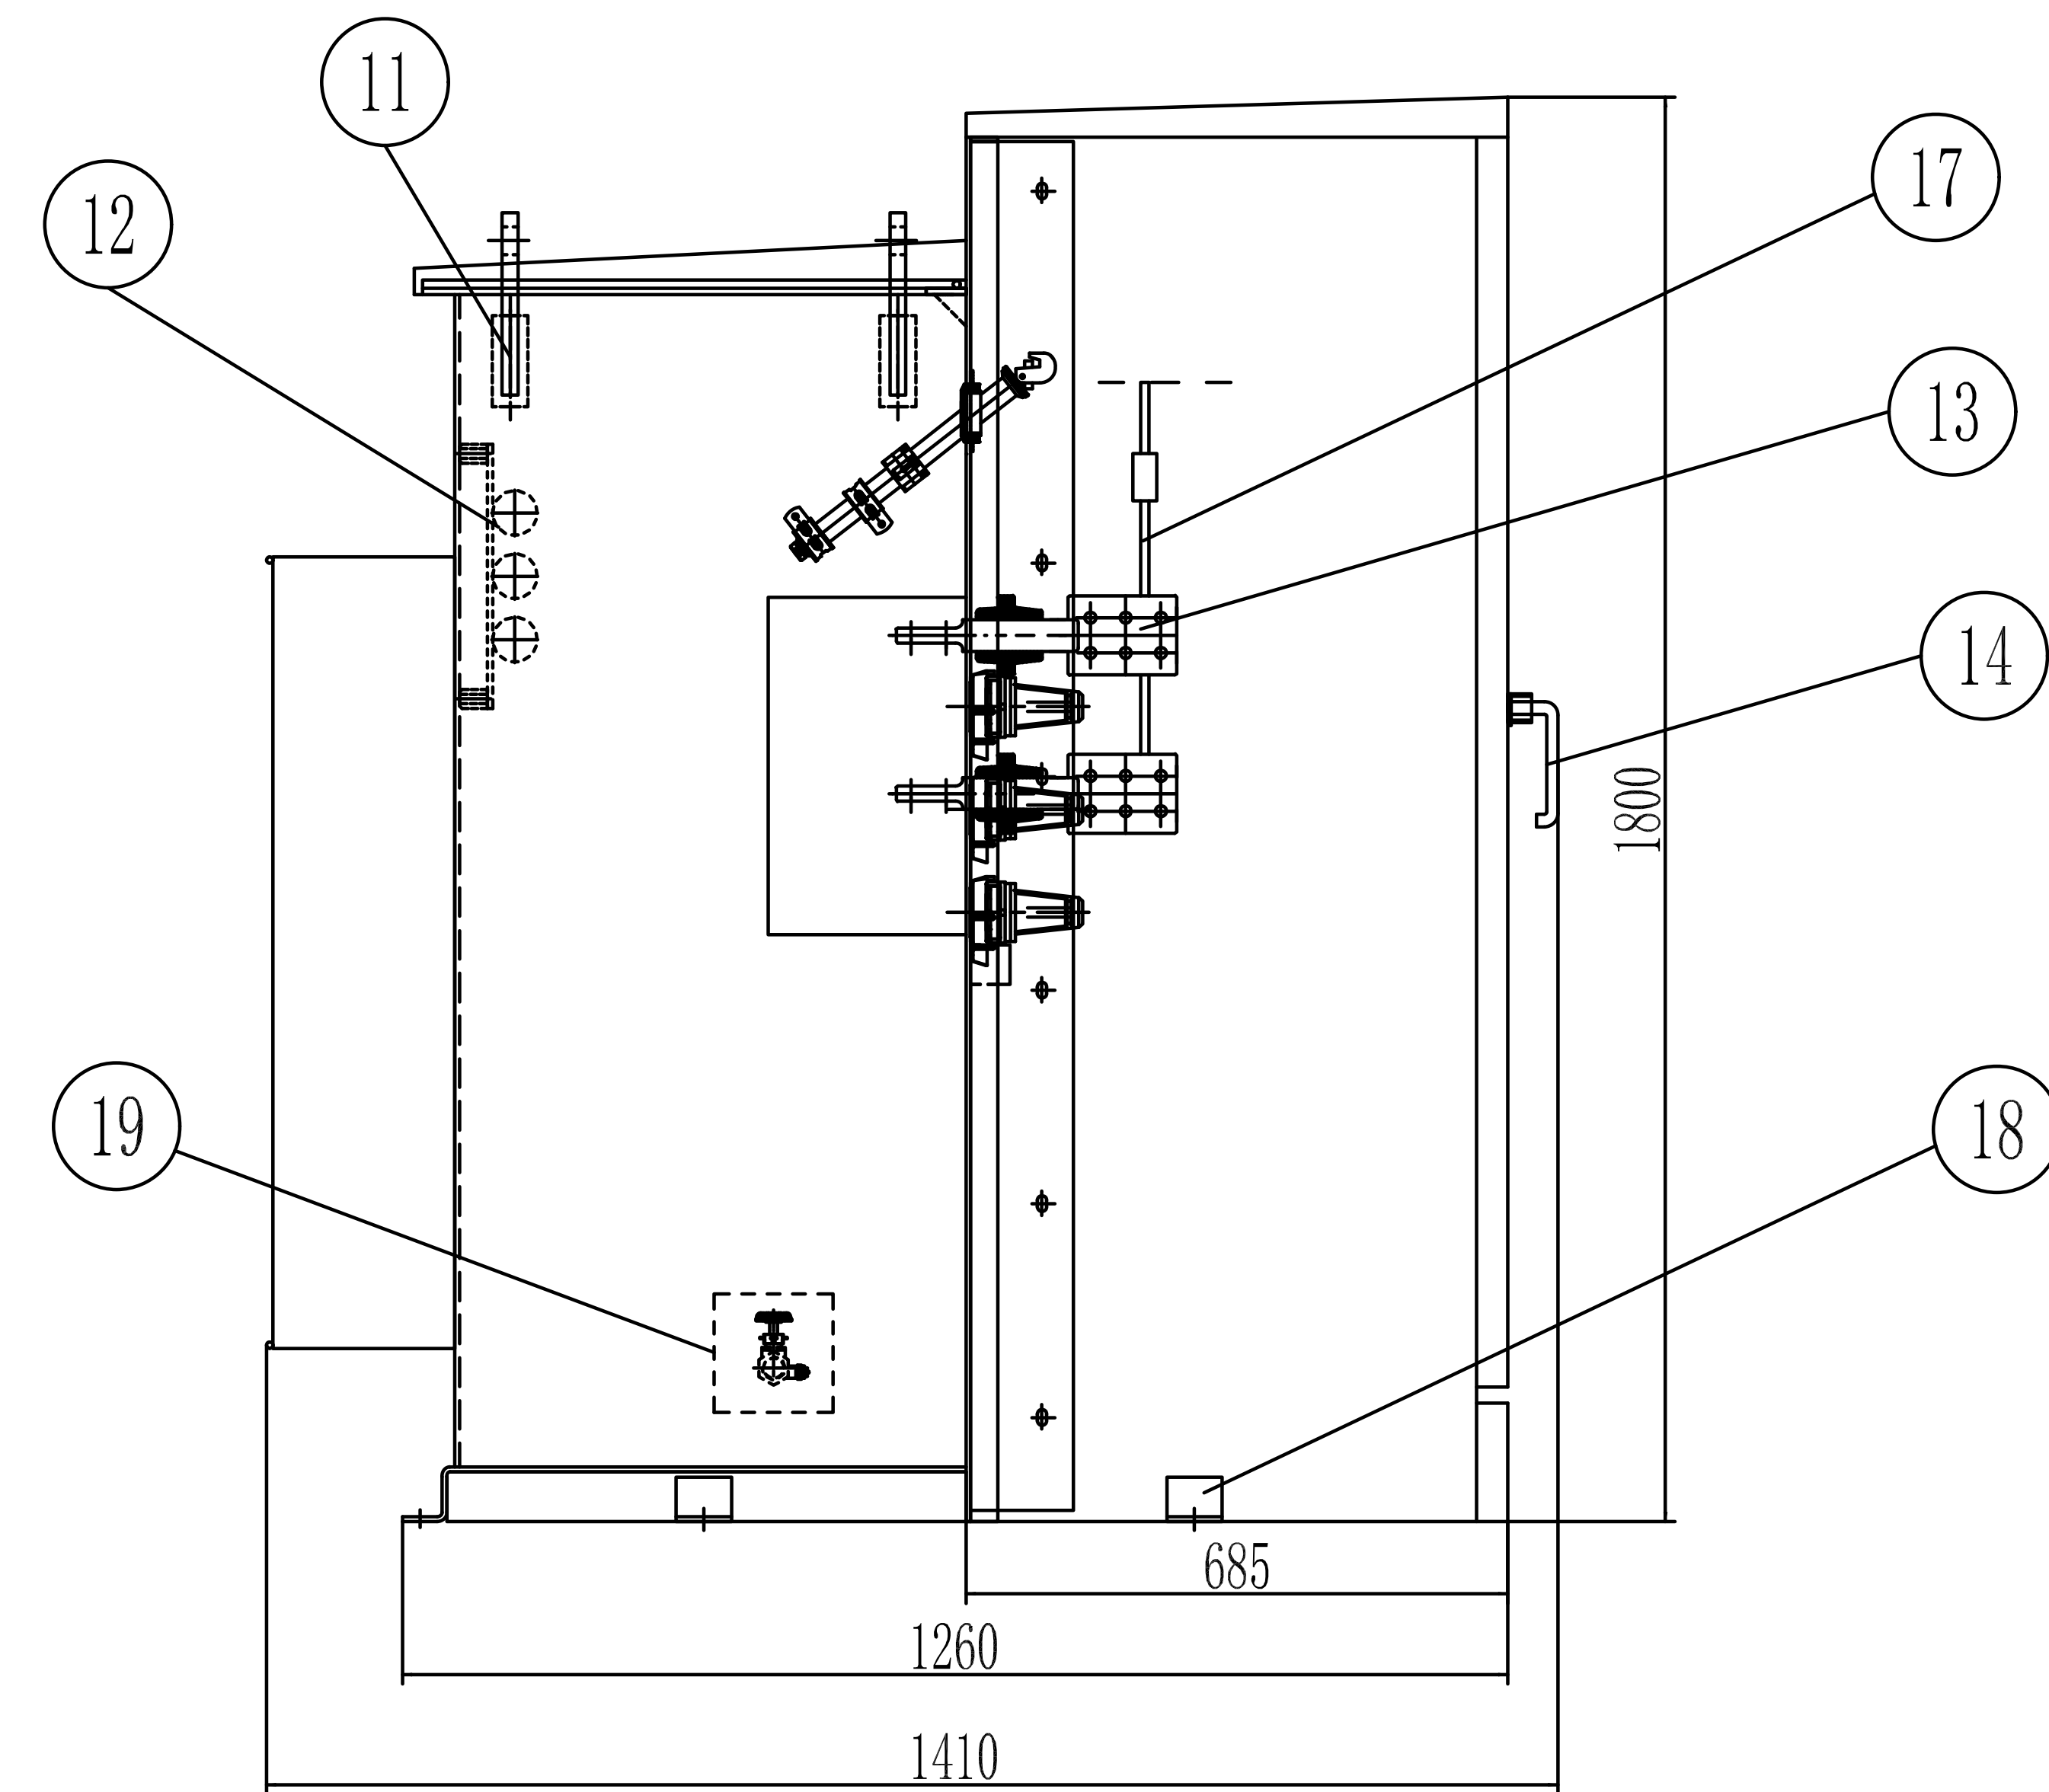


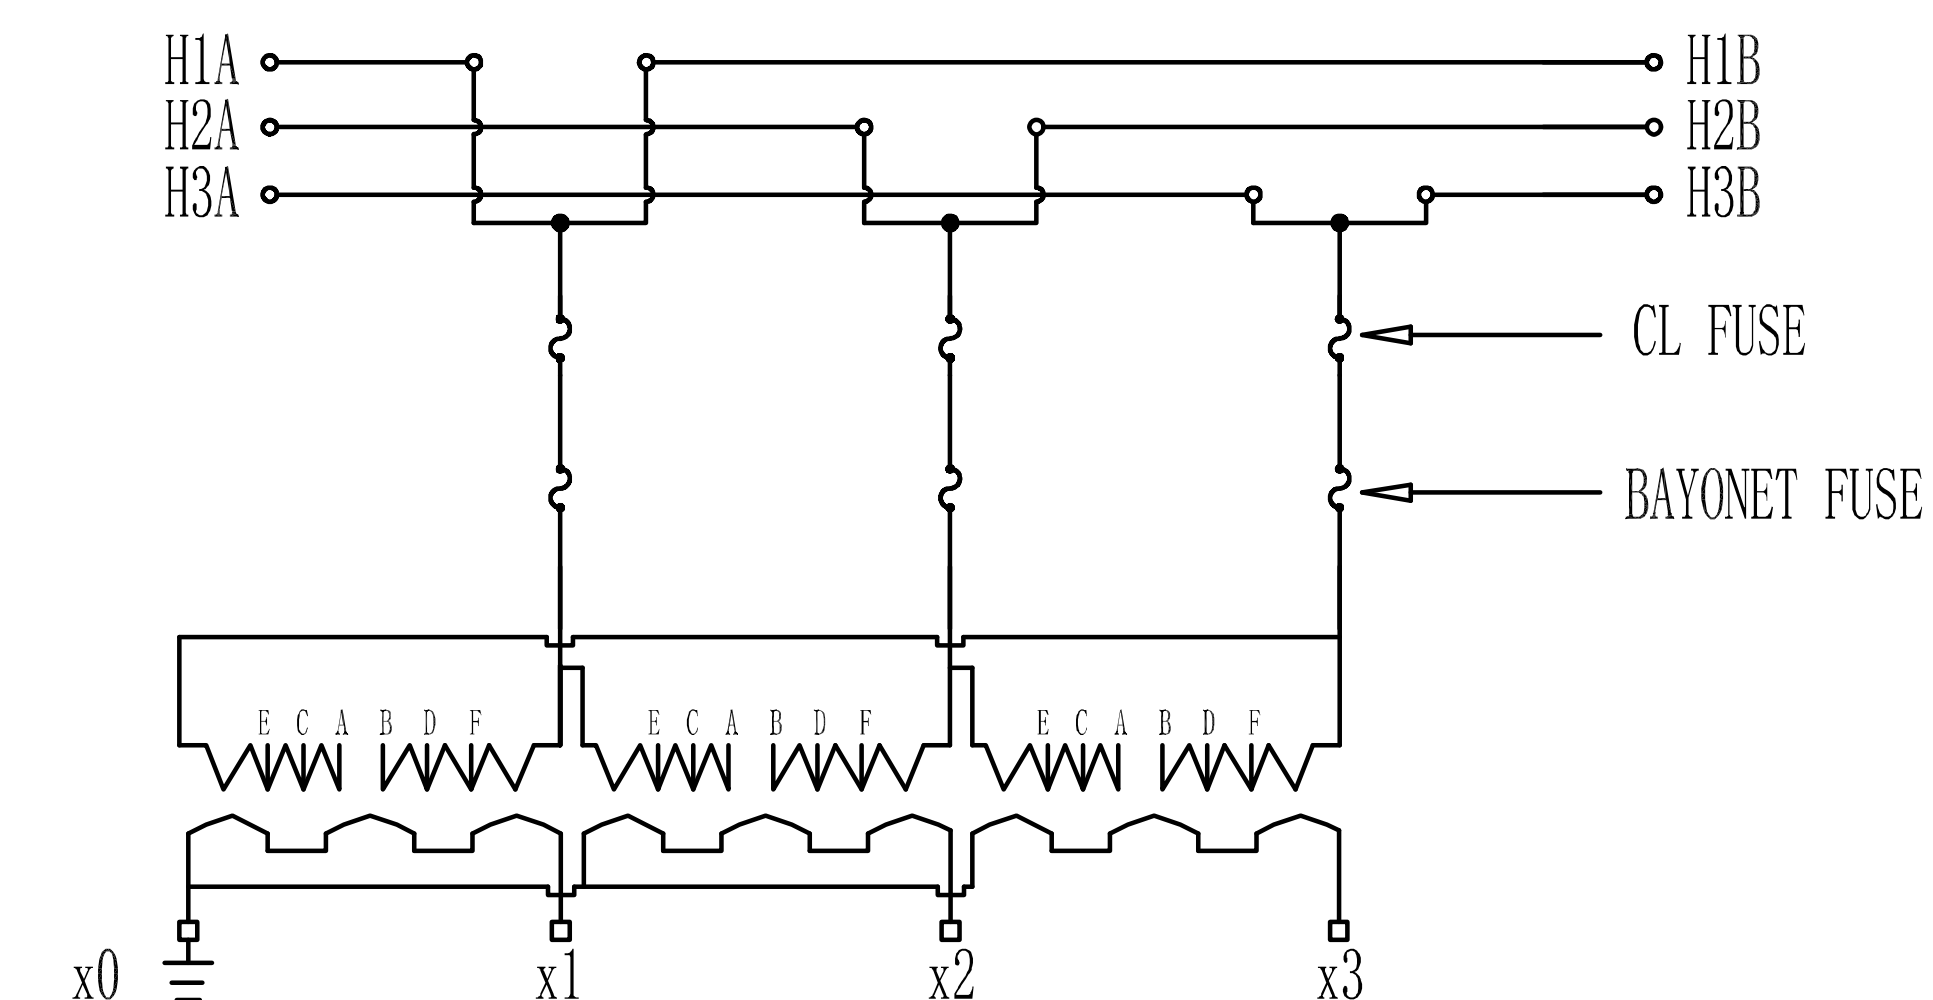


TECHNICAL DATA	
RATING	300kVA
PRIMARY VOLTAGE (V)	13200DELTA
SECONDARY VOLTAGE (V)	480GrdY/277
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
CONDUCTOR	ALUMINUM
PRIMARY BIL VOLTAGE	95kV
SECONDARY BIL VOLTAGE	30kV
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	3300 W
NO LOAD LOSSES	430 W
IMPEDANCE	3.5-4.5%
ALTITUDE	≤1000m
COLOR	MUNSELL NO. 7.0 GY 3.2/1.5
CORE FORM	THREE-PHASE THREE-COLUMN

Technical drawing of a mechanical assembly, likely a lamp or light fixture, showing a top-down view. The drawing includes the following dimensions and features:

- Overall Width:** 1550
- Overall Height:** 1350
- Internal Width:** 685
- Internal Height:** 90
- Top Section:** A rectangular area with a grid pattern, possibly representing a light source or a decorative element.
- Central Section:** A large rectangular area with a dashed vertical line and diagonal lines, possibly representing a central panel or a structural element.
- Bottom Section:** A rectangular area with a grid pattern, possibly representing a base or a decorative element.
- Mounting Brackets:** Two L-shaped brackets are shown at the bottom corners, indicating mounting points.

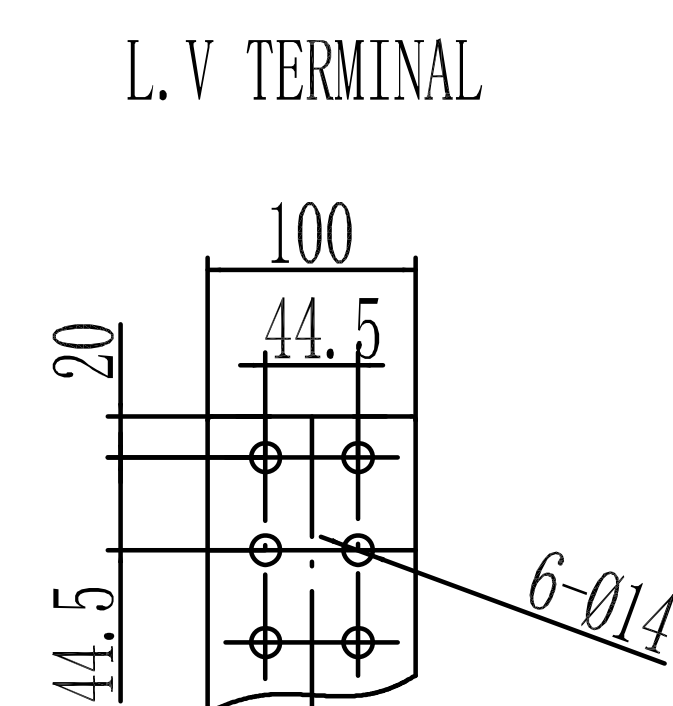

ALL DIMENSION DEVIATIONS: $\pm 10\%$

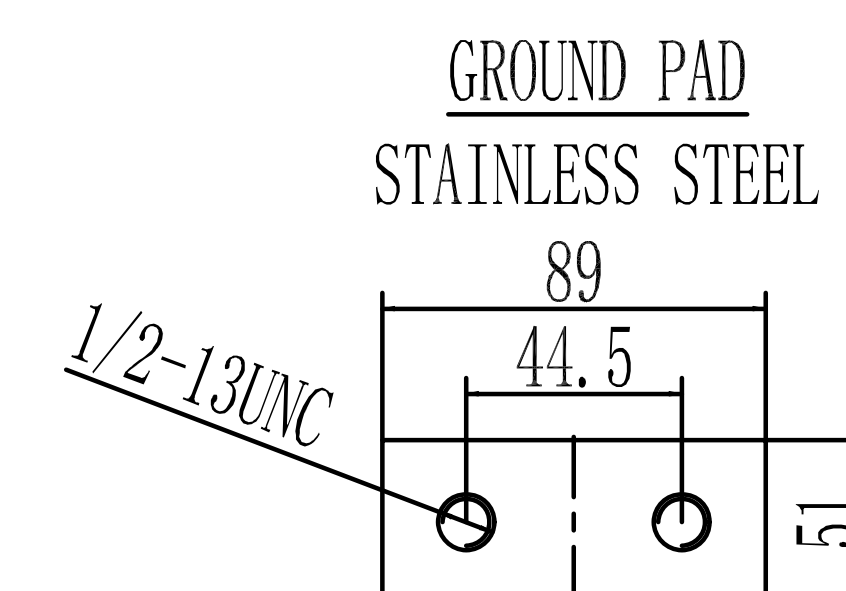

Eaglerise Electric &
Electronic (China) Co., Ltd.