



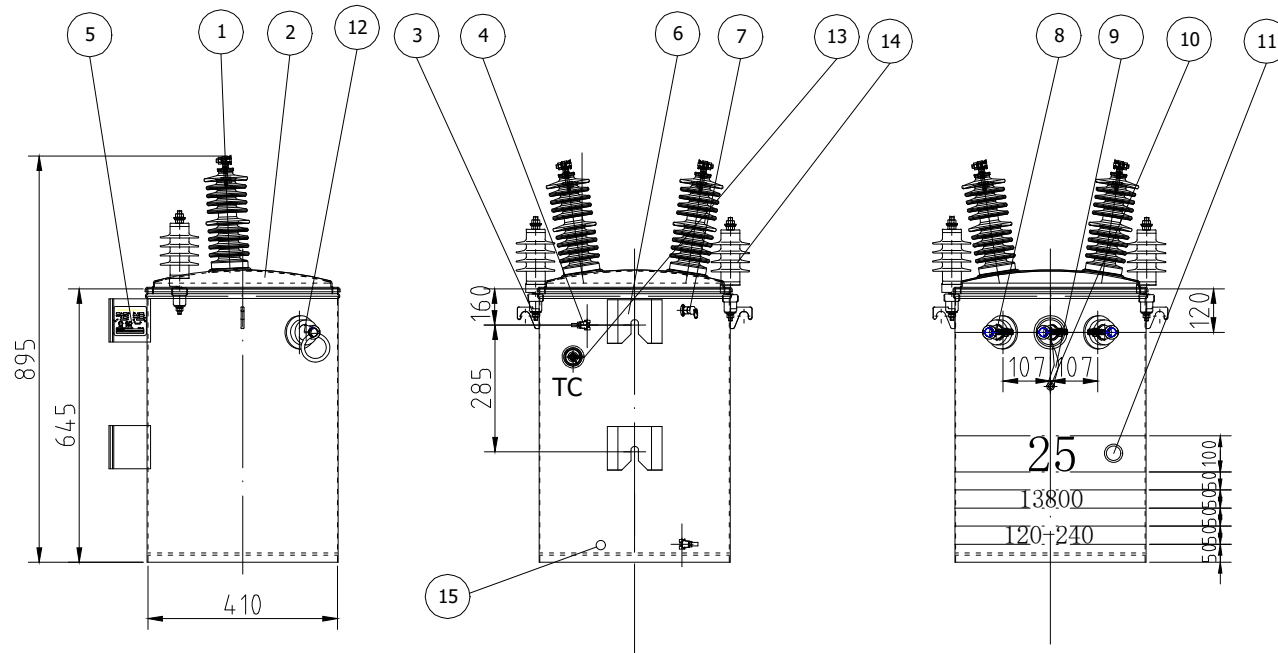



Diagram for connect



GROUNDING COUNECTOR
DETAIL



LV BUSHING TERMINAL
DETAIL



HV BUSHING TERMINAL
DETAIL



TECHNICAL DATA

RATING	25kVA
PRIMARY VOLTAGE(V)	13800
SECONDARY VOLTAGE(V)	120-240
INSULATION LEVEL(kV) H.V BIL	95
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	II0
CONDUCTOR	Copper
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	390W
NO LOAD LOSSES	80W
IMPEDANCE	>1.8%
ALTITUDE	≤1000m
COLOR	Battleship Grey

ITEM	WEIGHT
UNTANK WEIGHT	325 Lbs
TOTAL OIL WEIGHT	125 Lbs
TOTAL WEIGHT	398 Lbs

PARTS LIST

ITEM	DESCRIPTION	QTY
1	HV BUSHING (15kv,25A)	2
2	TANK COVER	1
3	LIFTING LUG	2
4	GROUNDING COUNECTOR	2
5	NAMEPLATE	1
6	BOTTOM BRACKET	2
7	IFD Orca	1
8	LV BUSHING(1.2kv 417A)	3
9	COPPER STRIP	2
10	GROUND STEEL PADS (TTC2)	4
11	PCB	1
12	CSP WITH LIGHT	1
13	5 POSITION TAP CHANGER +/- 2X2.5%	1
14	ARRESTER LIGHTNING ARRESTER	2
15	DRAIN VALVE	1

DWG. NAME

General Assembly Drawing

FIRST ANGLE
PROJECTION

SCALE

1

APPROVED

Sam

DRAWN

Mike

CHECKED

Jack

CHECKED

Iris

8/0.12/0.24

DATE

JIEZOU POWER



REV.
NO.

0