


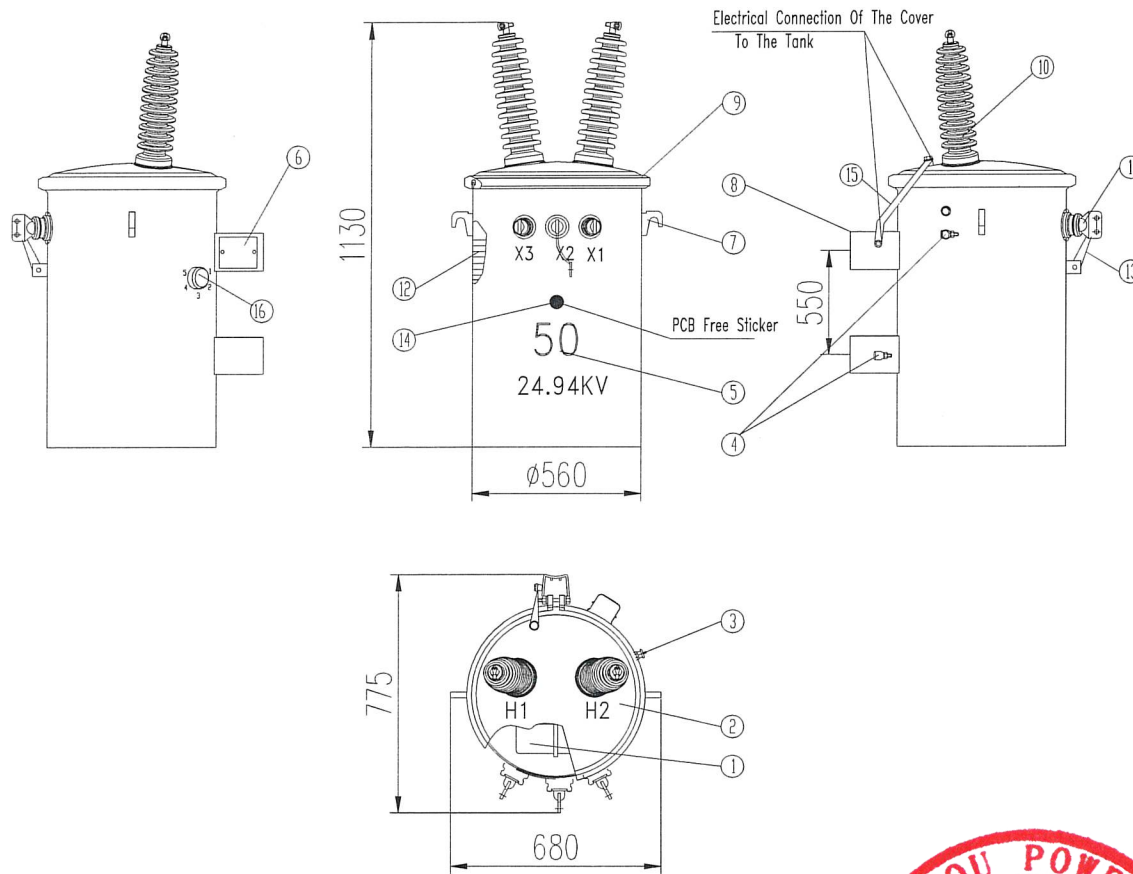

TECHNICAL DATA	
RATING	50kVA
PRIMARY VOLTAGE(V)	24940
SECONDARY VOLTAGE(V)	120/240
INSULATION LEVEL(kV) H.V BIL	150
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	Ii6
CONDUCTOR	CU
INSULATING OIL	MINERAL NO PCB
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	540W
NO LOAD LOSSES	50W
IMPEDANCE	≥1.5%
ALTITUDE	≤1000m
COLOR	ANSI 70

ITEM	WEIGHT
UNTANK WEIGHT	489 LBS
TOTAL OIL WEIGHT	196 LBS
TOTAL WEIGHT	805 LBS

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	Core & coil assemble	1
2	Tank Cover	1
3	Pressure Relief Device	1
4	Grounding Terminal	2
5	Marking On The Tank	1
6	Nameplate	1
7	Mounting Lug	2
8	Lifting Lug	2
9	Fastening Ring	1
10	HV Bushing	2
11	LV Bushing	3
12	Transformer Oil	
13	Grounding Strap	1
14	PCB Free	1
15	Electrical Connection Of The Cover To The Tank	1
16	Tap Changer	1
17		

DESIGN	MIKE W	DATE	
CHECK	FLAN	APPROVE	SAM S
CRAFT		DATE	2024.1.6
STANDARDIZE			

DWG: D50-240108-04		QTY WEIGHT SCALE	
D50/24.94-0.24		B/O	
JZP		JZP	