
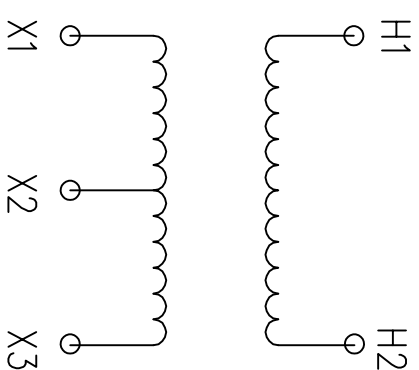
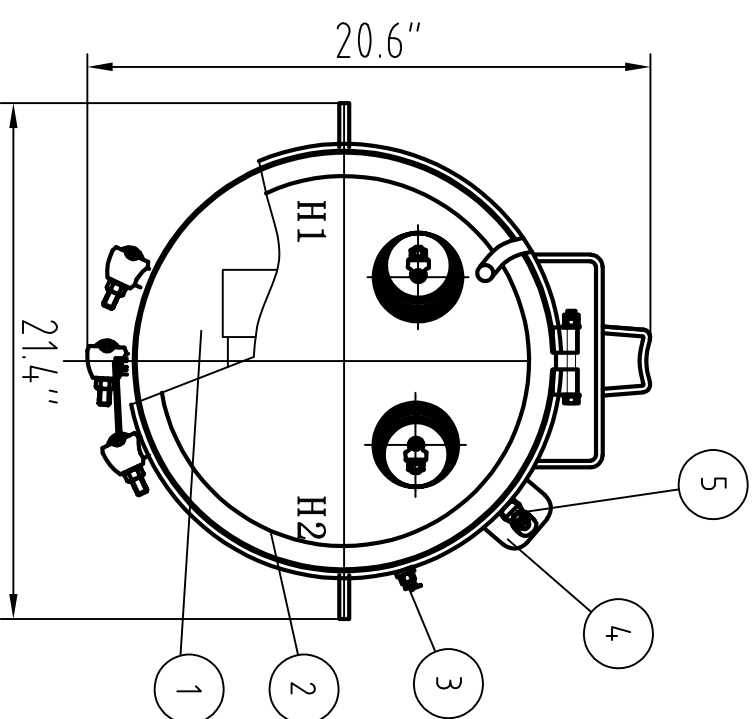


TECHNICAL DATA	
RATING	50KVA
PRIMARY VOLTAGE(V)	13200/7620
SECONDARY VOLTAGE(V)	120/240
INSULATION LEVEL(KV)H.V BIL	95
INSULATION LEVEL(KV)L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	L10
CONDUCTOR	COPPER
POSITION OFF-LOAD TAP CHANGER	±5%
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	500W
NO LOAD LOSSES	32W
IMPEDANCE	2.38%--2.63%
ALTITUDE	≤ 1000m
COLOR	MUNSELL 5BG 7.0/4 GRAY
STOCK NO.	

ITEM	WEIGHT
UNTANK WEIGHT	463lbs
TOTAL OIL WEIGHT	150lbs
TOTAL WEIGHT	706lbs

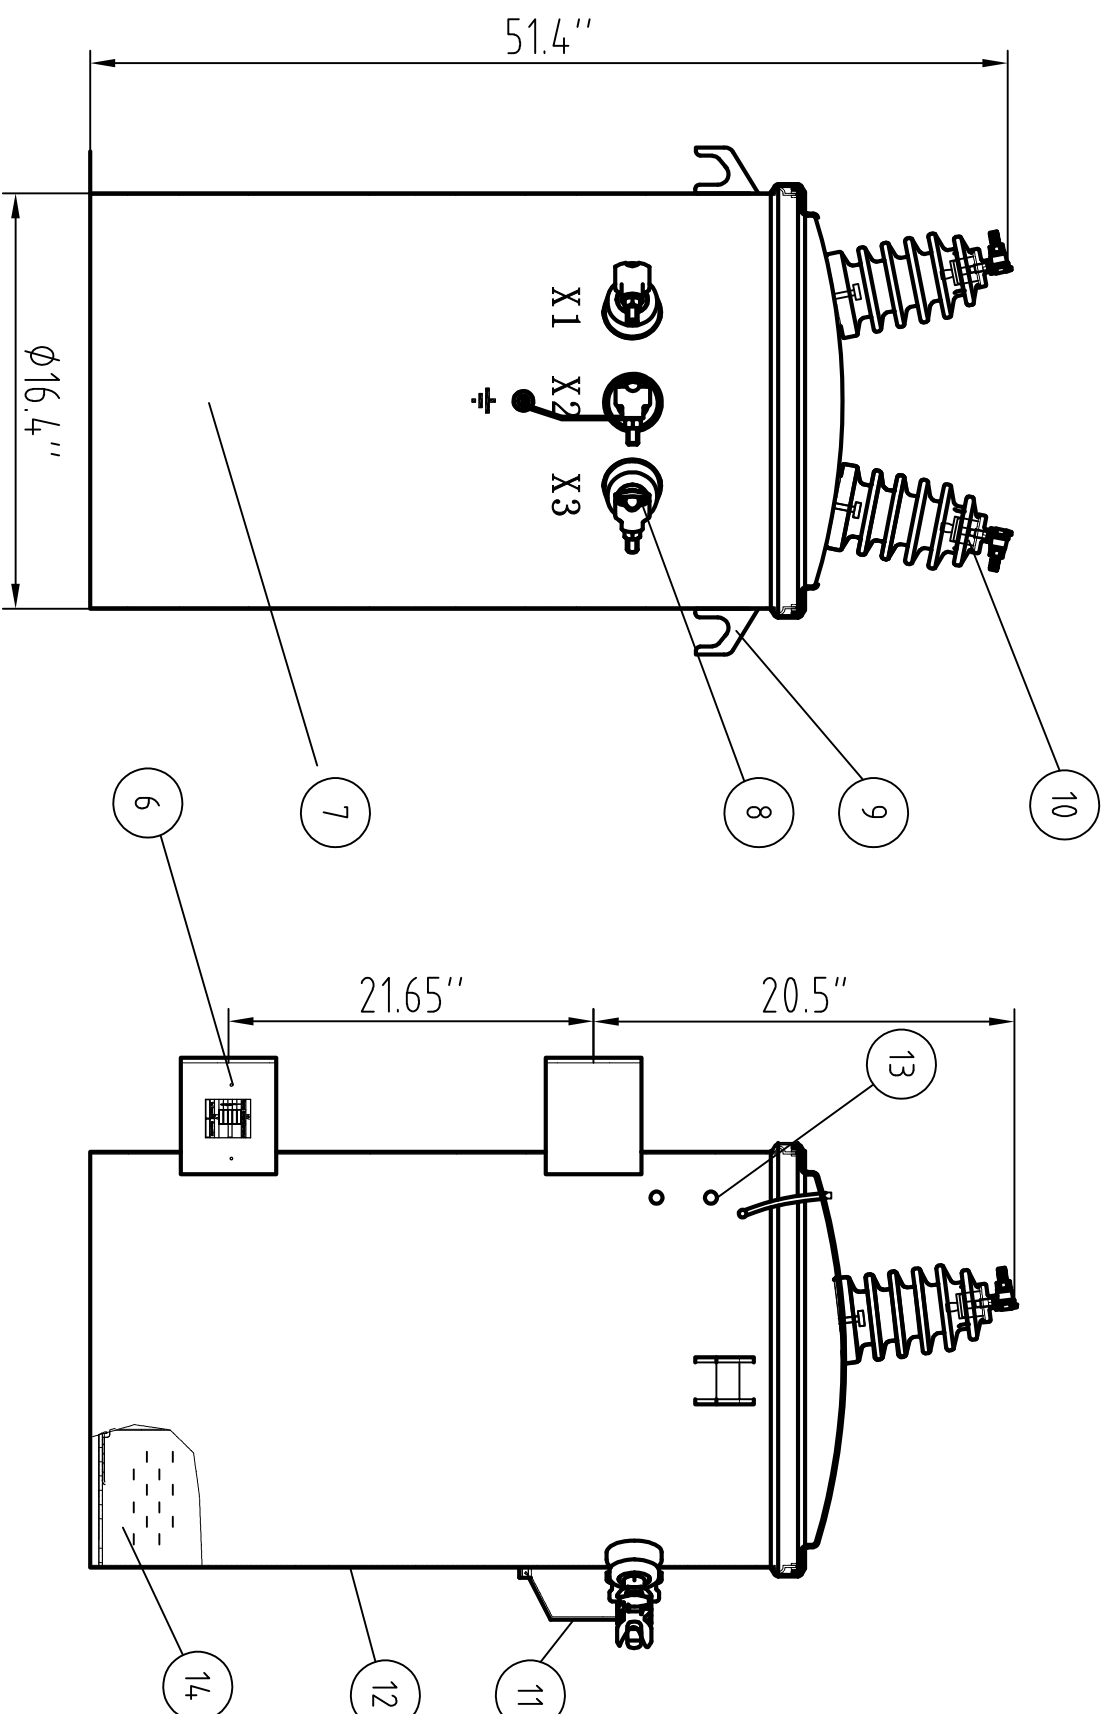

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	Core&Coil Assemble	1
2	Tank Cover	1
3	Pressure Relief Device	1
4	Grounding Terminal	3
5	Tap Changer	1
6	Nameplate	1
7	Mark	1
8	LV Bushing	3
9	Lifting Hook	2
10	HV Bushing	2
11	Copper Strip	1
12	Tank	1
13	Lightning Arrester Nut	4
14	Transformer Oil	

[illegible]

