


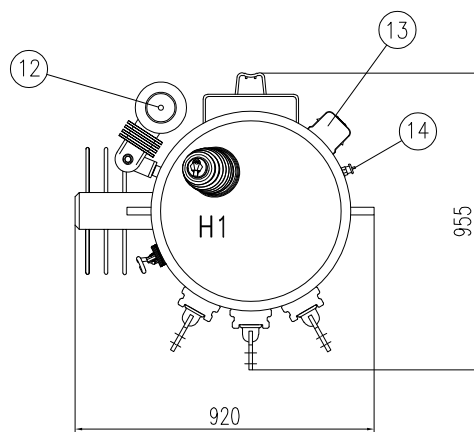
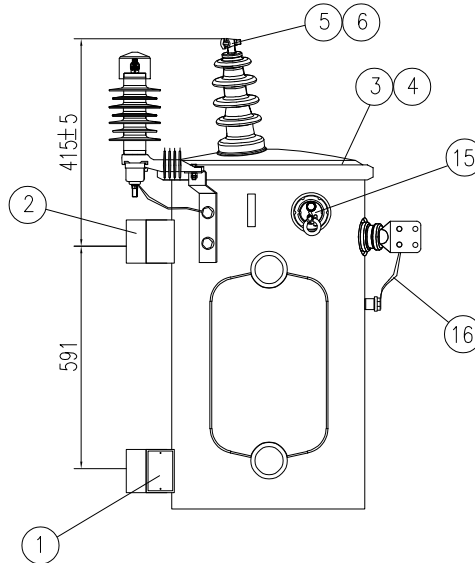
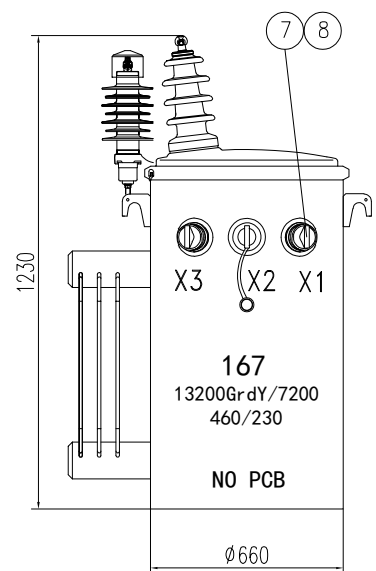


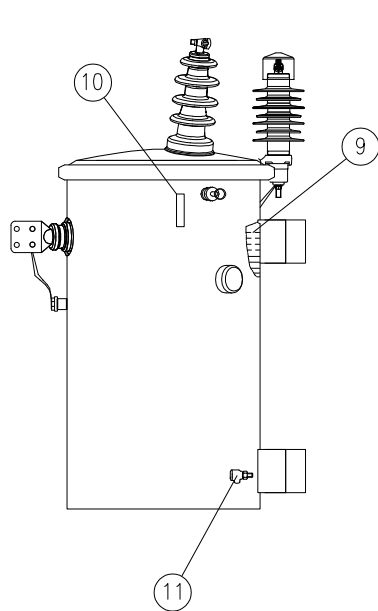

Upper Support Lug

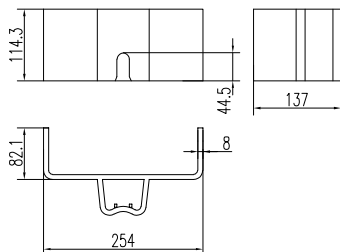

Arrester Diagram for connect

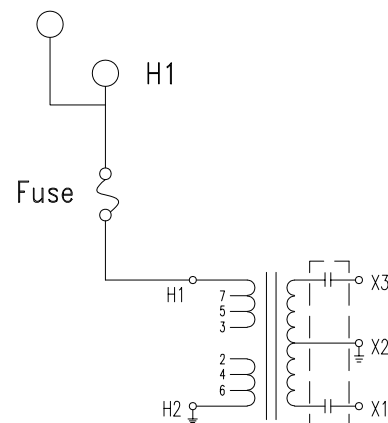

Circuit Breaker

TECHNICAL DATA

RATING	167kVA
PRIMARY VOLTAGE(V)	13200GrdY/7200
SECONDARY VOLTAGE(V)	460/230
INSULATION LEVEL(kV)H.V BIL	95
INSULATION LEVEL(kV)L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	li6
CONDUCTOR	COPPER
POSITION OFF-LOAD TAP CHANGER	±2×2.5%
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	14.10W
NO LOAD LOSSES	65W
IMPEDANCE	3.0%(±7.5%)
ALTITUDE	≤ 1000m
COLOR	MUNSELL 5BG 7.0/4 GRAY
POLARITY	ADDITIVE
APPLIED STANDARD.	NEA / IEEE Std C57.12.00

ITEM	WEIGHT
UNTANK WEIGHT	611kg
TOTAL OIL WEIGHT	126kg
TOTAL WEIGHT	853kg

ITEM	DESCRIPTION	QTY
1	Nameplate	1
2	Support Lug	2
3	Tank Cover	1
4	Fastening Ring	1
5	HV Bushing	1
6	HV Terminal	1
7	LV Bushing	3
8	LV Terminal	3
9	Transformer Oil	1
10	Lifting Lugs	2
11	Grounding Terminal	1
12	Arrester	1
13	Tap Changer Switch	1
14	Pressure Relief Device	1
15	Circuit Breaker	1
16	Copper Strap	1

DH15-167/7.62-0.46
Outling Drawing

DH15-240629-01

Design	WLY	Standardiza
Check		
Verify		
Approve		Date 2024-6-29

JIEZOU POWER

