



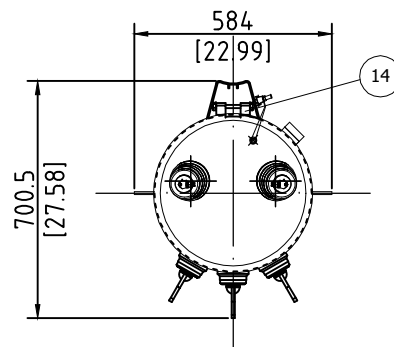


NAMEPLATE DETAIL

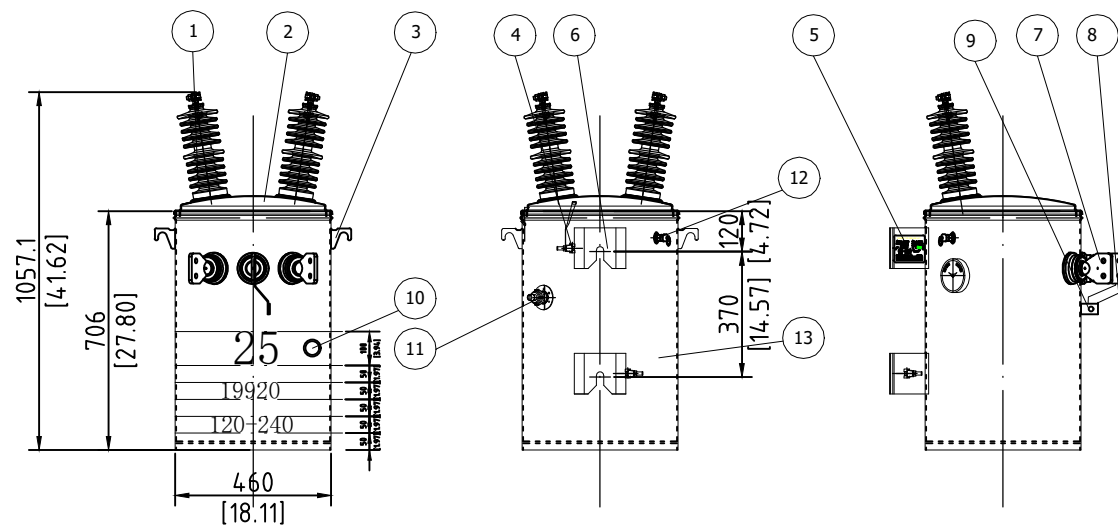


GROUNDING COUNECTOR

DETAIL




LV BUSHING TERMINAL

DETAIL



HV BUSHING TERMINAL DETAIL



TECHNICAL DATA	
RATING	25kVA
PRIMARY VOLTAGE(V)	34500GRDY/19920
SECONDARY VOLTAGE(V)	120-240
INSULATION LEVEL(kV) H.V BIL	150
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	II0
CONDUCTOR	AL
INSULATING OIL	45#
TEMPERATURE RISE	65°C
EFFICIENCY	98.63%
LOAD LOSS AT RATED VOLTAGE	550W
NO LOAD LOSSES	45W
IMPEDANCE	2.5-3.5%
ALTITUDE	≤1000m
COLOR	ANSI 70

ITEM	WEIGHT
CORE WEIGHT	127 Lbs
TOTAL OIL WEIGHT	235 Lbs
TOTAL WEIGHT	565 Lbs

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	HV BUSHING (35kV,25A)	2
2	STAINLESS STEEL COVER	1
3	LIFTING LUG	2
4	GROUNDING COUNECTOR	2
5	NAMEPLATE	1
6	BOTTOM BRACKET	2
7	LV BUSHING(1.2kv 1/2)	3
8	COPPER STRIP	2
9	GROUND STEEL PADS (TTC2)	1
10	NON-PCB	1
11	TAP CHANGER	1
12	INTEMAL FAUIT DETECTOR	1
13	STAINLESS STEEL TANK	1
14	STAINLESS STEEL COVER BAND	1

TYPE
E-25/34.5GRDY/19.92/0.12-0.24

DWG. NAME

General Assembly Drawing

DRAWN	CHECKED	CHECKED	APPROVED
-------	---------	---------	----------

ED	FIRST ANGLE PROJECTION
----	---------------------------

SCAIF	1
-------	---

-	1
---	---

REV.
NO.