




Approved
June 5th 2024
R.Vaugois

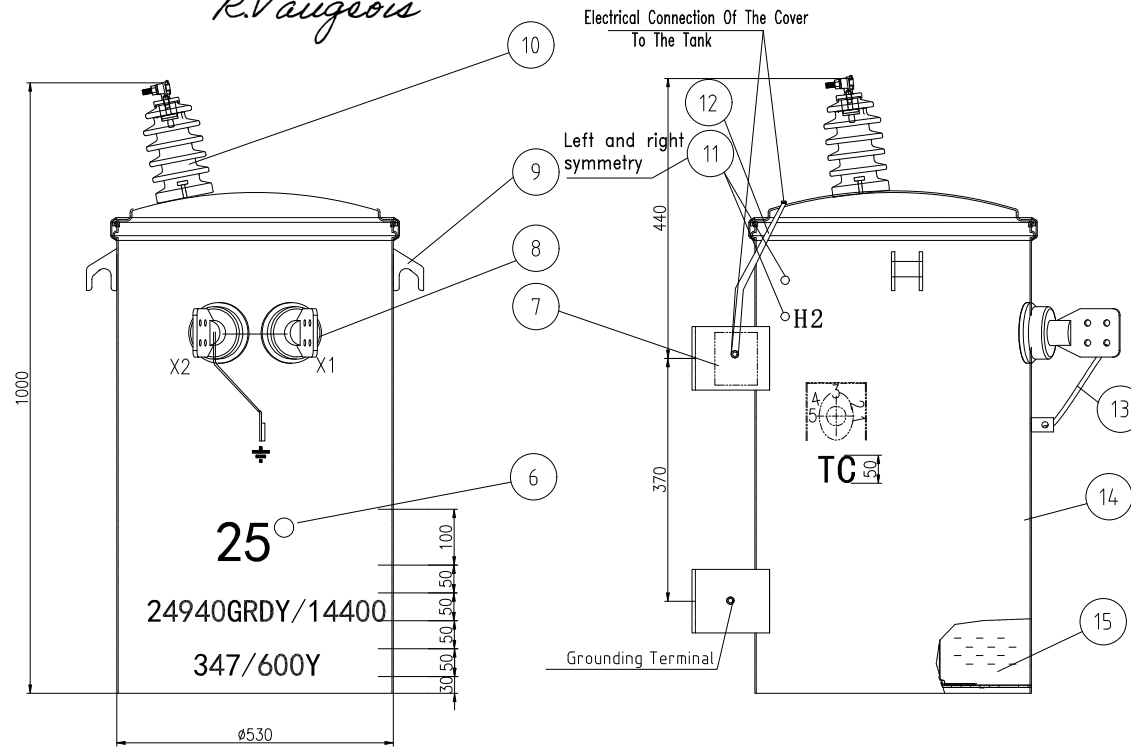


All decals/stencils are to be white

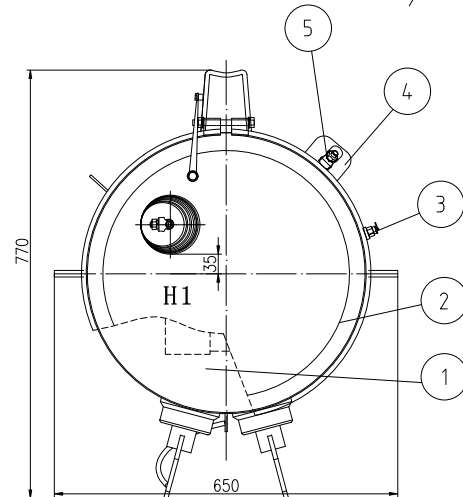

LV BUSHING TERMINAL



HV BUSHING TERMINAL



TECHNICAL DATA

RATING	25kVA
PRIMARY VOLTAGE(V)	24940GRDY/14400
SECONDARY VOLTAGE(V)	347/600Y
INSULATION LEVEL(kV)H.V BIL	125
INSULATION LEVEL(kV)L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	LI0
CONDUCTOR	ALUMINUM
POSITION OFF-LOAD TAP CHANGER	±2×2.5%
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	290W
NO LOAD LOSSES	80W
IMPEDANCE	2.0%--3.0%
ALTITUDE	≤ 1000m
COLOR	MUNSELL 5BG 7.0/4 GRAY
POLARITY	ADDITIVE
APPLIED STANDARD.	CSA C2.2 CSA C802.1

ITEM	WEIGHT
UNTANK WEIGHT	320Lbs
TOTAL OIL WEIGHT	221Lbs
TOTAL WEIGHT	640Lbs

PARTS LIST

ITEM	DESCRIPTION	QTY
1	Core&Coil Assemble	1
2	Tank Cover	1
3	Pressure Relief Device	1
4	Grounding Terminal	3
5	Tap Changer	1
6	Mark	1
7	Nameplate	1
8	LV Bushing	2
9	Lifting Hook	2
10	HV Bushing	1
11	Lightning Arrester Nut	4
12	Electrical Connection Of The Cover To The Tank	1
13	Copper Strip	1
14	Tank	1
15	Transformer Oil	

DL-25/24.94/0.347
Outling Drawing

Remant	Time	Subarea	Signature	Date
Design	XBW	Standardiza		
Date	03/22/24			
Check	JACK	Verify	IRIS	
Craft		Approve	SAM	

JIE ZOU POWER

TRANSFORMER



SINGLE PHASE POLE
MOUNTED TRANSFORMER

1

PH

25

kVA

SERIAL NO.

IMPEDANCE AT 85°C

%

PRODUCT NO.

BIL

125/30

kV

TEMPERATURE RISE

65°C

HV

2494.0GRDY/144.00

V

CONDUCTOR MATERIAL

AL

LV

34.7/600Y

V

FREQUENCY

60Hz

☐

POLARITY

ADDITIVE


TYPE OF OIL

☐ MINERAL

☐

STANDARD PER CSA C 2.2


< 1PPM PCB

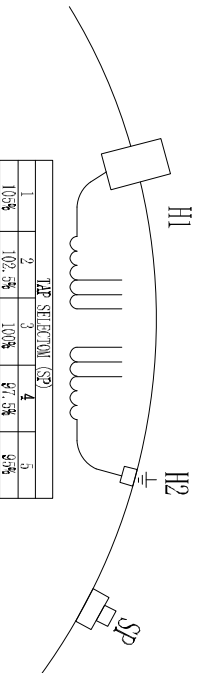

VOL OF OIL:

TOTAL MASS:

DATE OF MFG.



JIEZOU POWER

WWW.jiezoupower.com