



Approved
June 5 2024


R. Vaugois

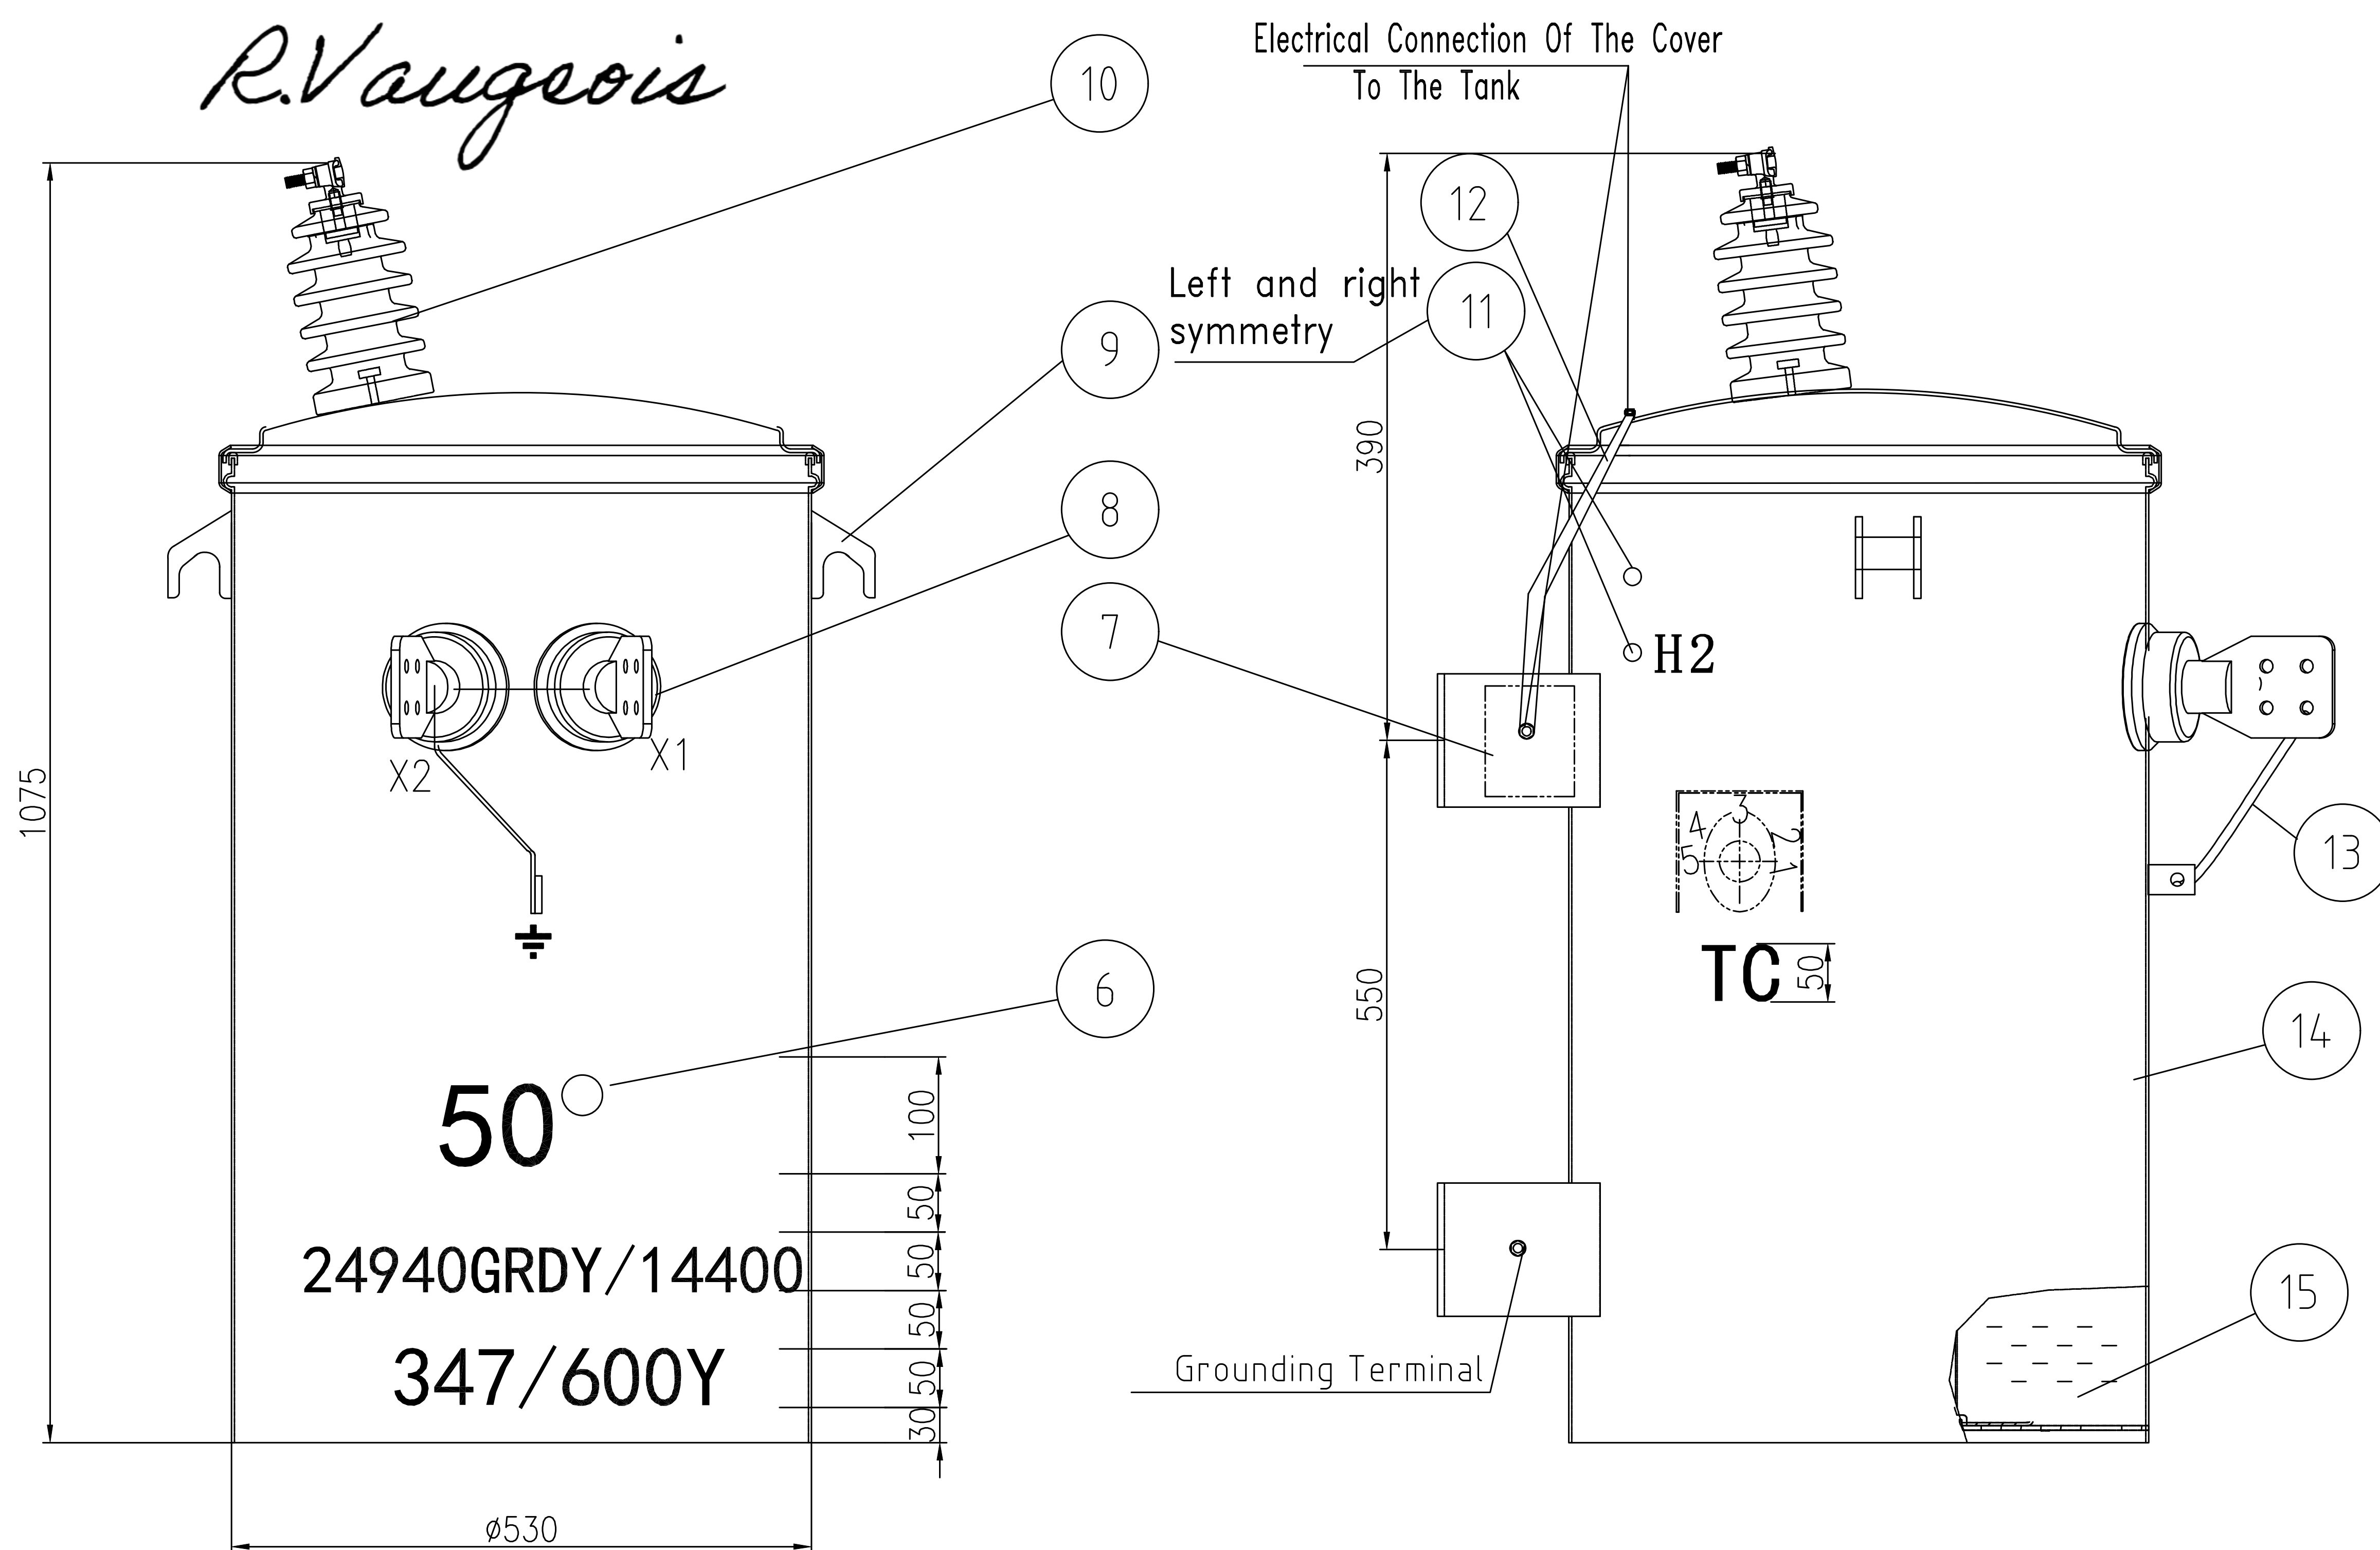


All decals/stencils are to be white

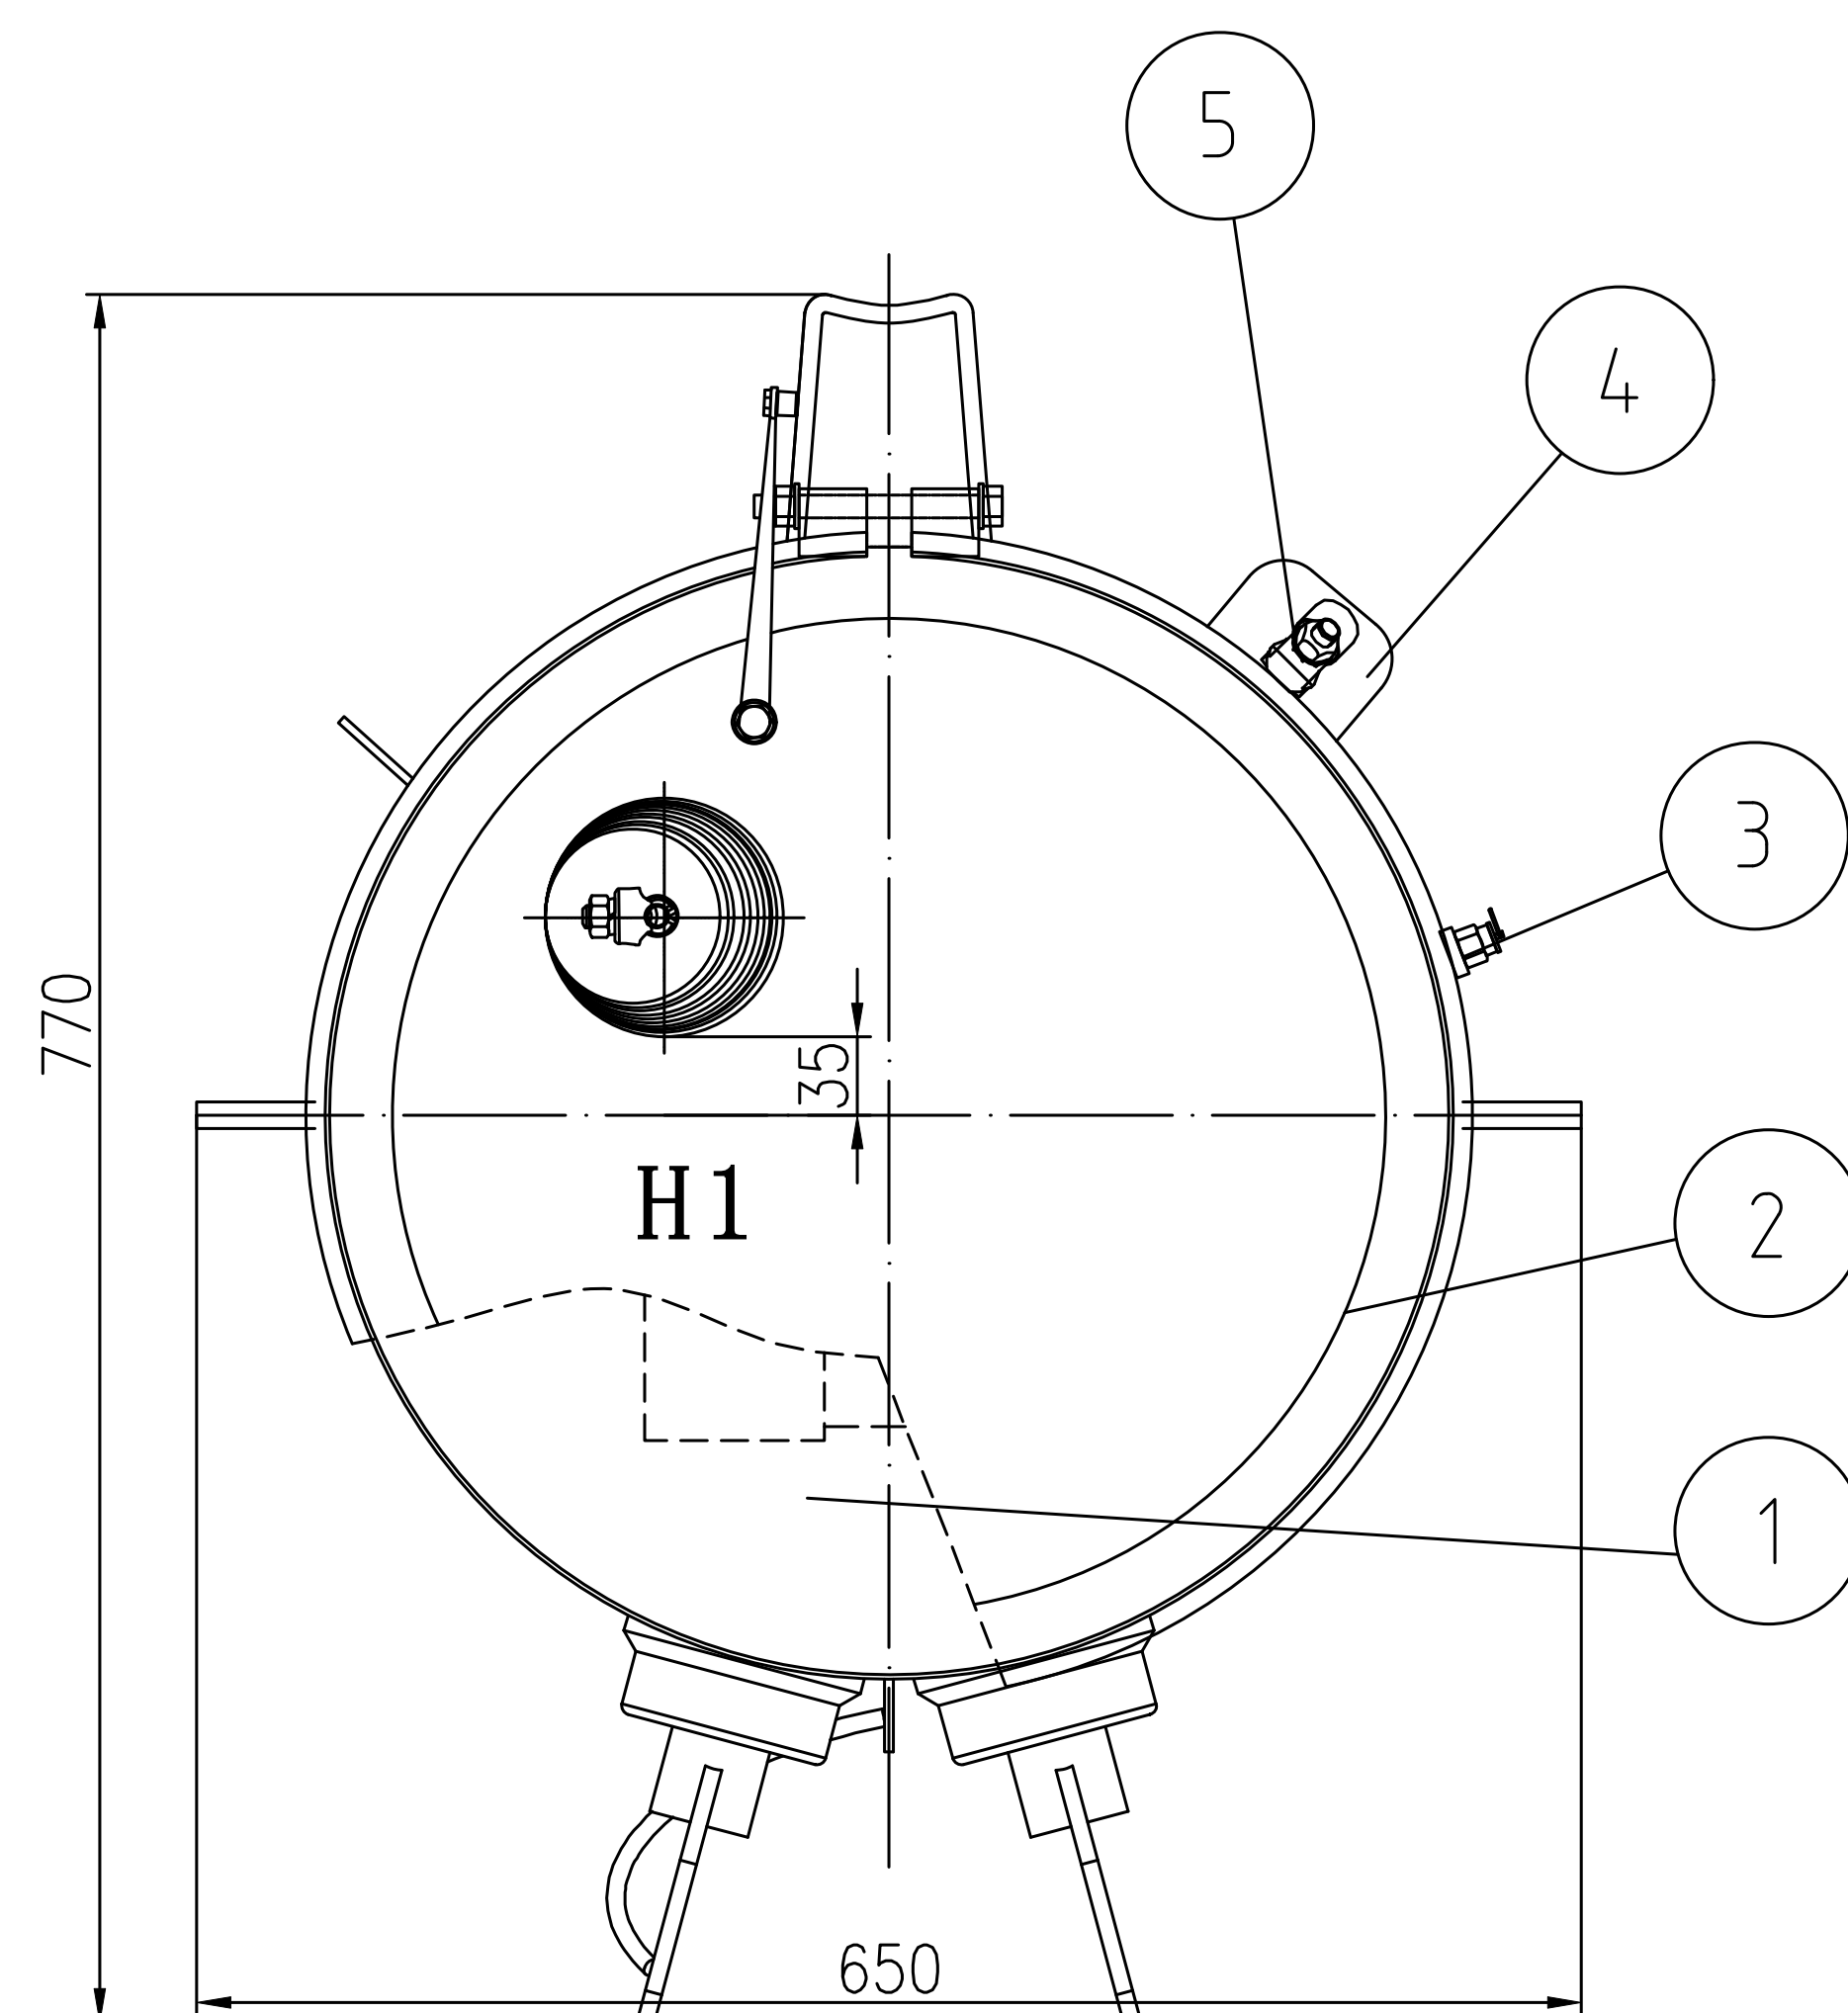

LV BUSHING TERMINAL

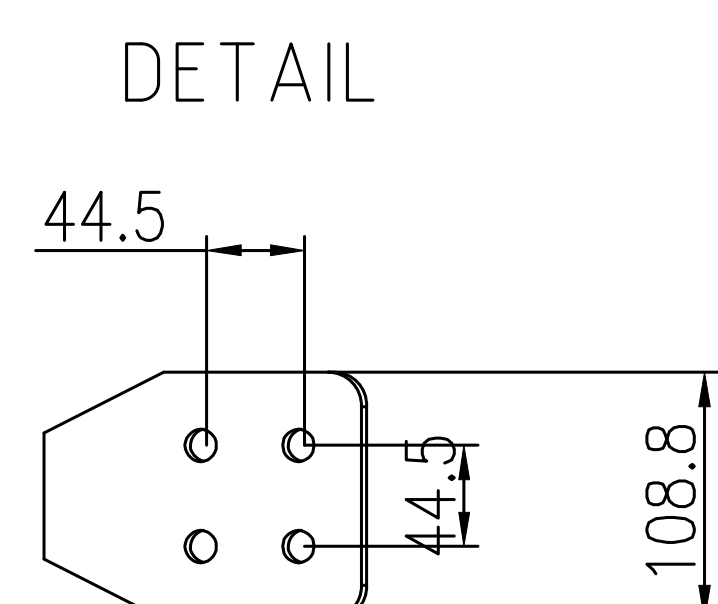

HV BUSHING TERMINAL

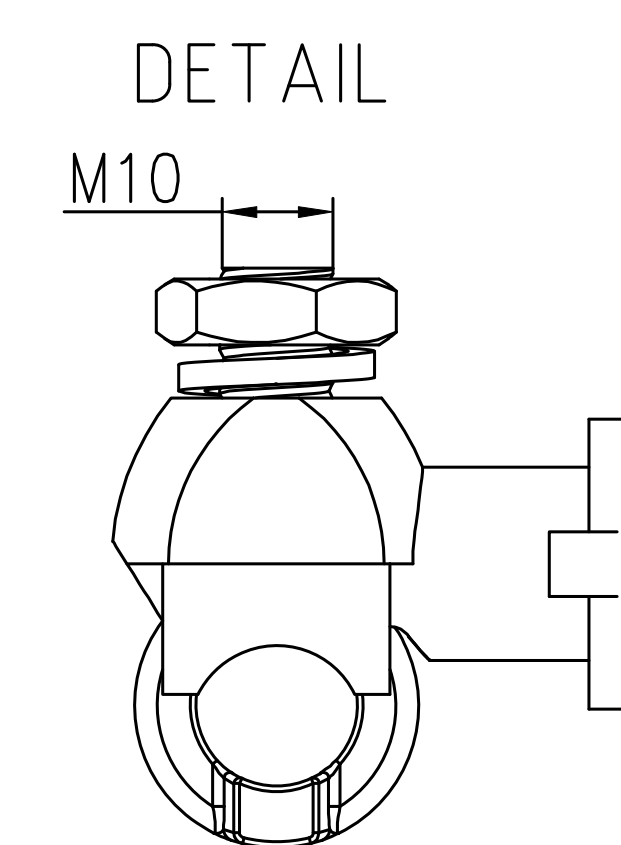

TECHNICAL DATA

RATING	50kVA
PRIMARY VOLTAGE(V)	24940GRDY/14400
SECONDARY VOLTAGE(V)	347/600Y
INSULATION LEVEL(kV)H.V BIL	125
INSULATION LEVEL(kV)L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	LI0
CONDUCTOR	ALUMINUM
POSITION OFF-LOAD TAP CHANGER	±2×2.5%
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	500W
NO LOAD LOSSES	135W
IMPEDANCE	2.0%--3.0%
ALTITUDE	≤ 1000m
COLOR	MUNSELL 5BG 7.0/4 GRAY
POLARITY	ADDITIVE
APPLIED STANDARD.	CSA C2.2 CSA C802.1

ITEM	WEIGHT
UNTANK WEIGHT	408Lbs
TOTAL OIL WEIGHT	243Lbs
TOTAL WEIGHT	761Lbs

PARTS LIST

ITEM	DESCRIPTION	QTY
1	Core&Coil Assemble	1
2	Tank Cover	1
3	Pressure Relief Device	1
4	Grounding Terminal	3
5	Tap Changer	1
6	Mark	1
7	Nameplate	1
8	LV Bushing	2
9	Lifting Hook	2
10	HV Bushing	1
11	Lightning Arrester Nut	4
12	Electrical Connection Of The Cover To The Tank	1
13	Copper Strip	1
14	Tank	1
15	Transformer Oil	

DL-50/24.94/0.347
Outling Drawing

Remart	Time	Subarea	Signature	Date
Design	XBW	Standardiza		
Date	03/22/24			
Check	JACK	Verify	IRIS	
Craft		Approve	SAM	

JIE ZOU POWER

TRANSFORMER



SINGLE PHASE POLE
MOUNTED TRANSFORMER

I PH 50 kVA SERIAL NO.

IMPEDANCE AT 85°C % PRODUCT NO.


BIL 125/30 kV TEMPRATURE RISE 65°C

HV 2494.0GRDY/144.00 V CONDUCTOR MATERIAL AL

LV 347/600Y V FREQUENCY 60Hz

☐ POLARITY ADDITIVE ☐ TYPE OF OIL MINERAL ☐


STANDARD PER CSA C 2.2 < 1PPM PCB

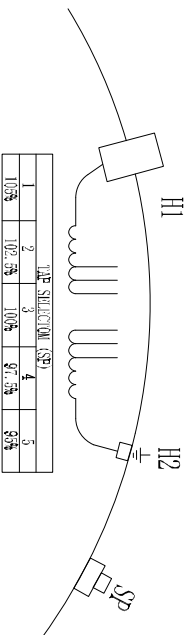

VOL OF OIL:

TOTAL MASS:

DATE OF MFG.



JIEZOU POWER

WWW.jiezoupower.com