


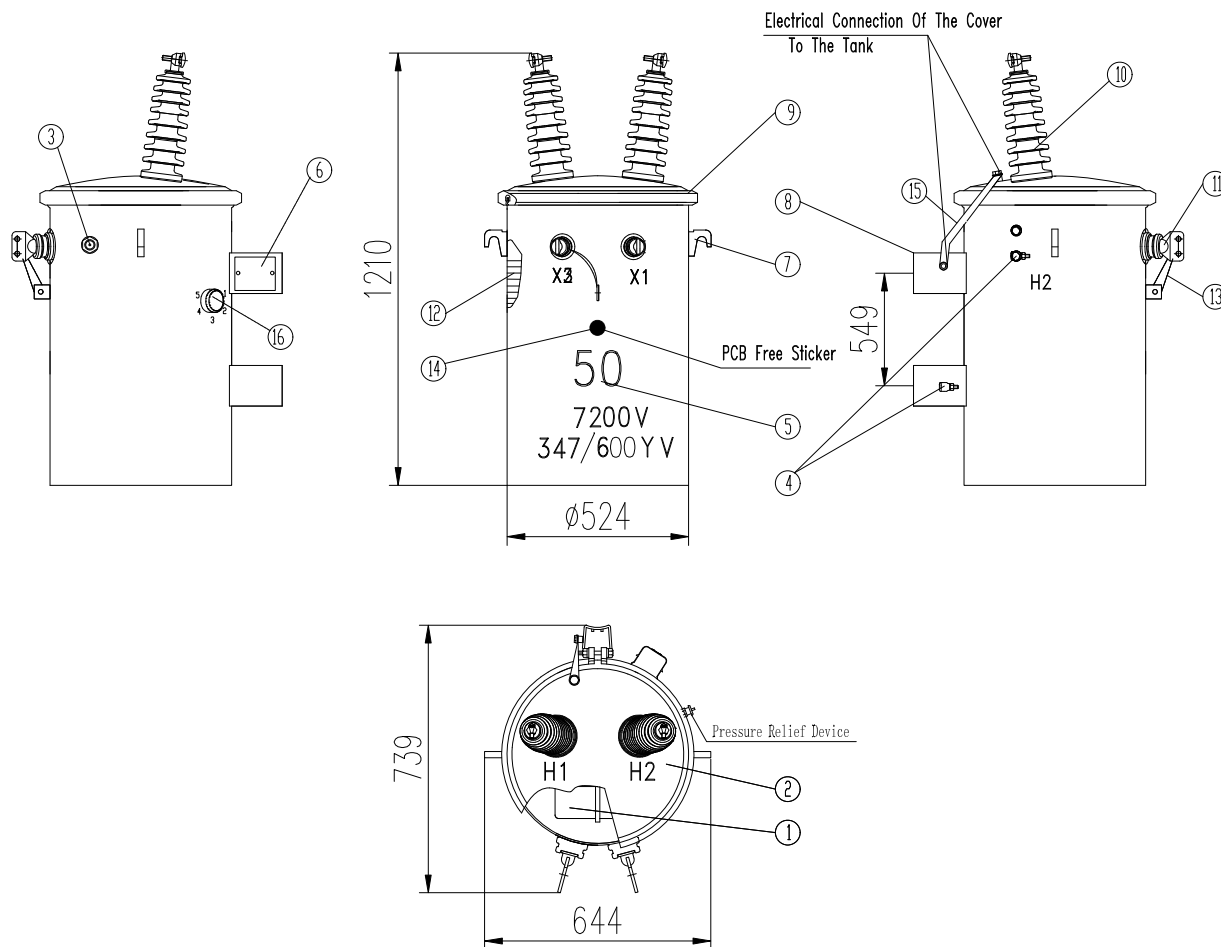

NOTE: Stainless steel Oil tank

TECHNICAL DATA

RATING	50kVA
PRIMARY VOLTAGE(V)	7200
SECONDARY VOLTAGE(V)	347 /600Y
INSULATION LEVEL(kV) H.V BIL	95
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	Ii6
CONDUCTOR	CU
INSULATING OIL	FR3
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	122W
NO LOAD LOSSES	700W
IMPEDANCE	4.0%
ALTITUDE	≤5500FEET
COLOR	ANSI 70
POLARITY	ADDITIVE

ITEM	WEIGHT
UNTANK WEIGHT	443 LBS
TOTAL OIL WEIGHT	220 LBS
TOTAL WEIGHT	794 LBS

PARTS LIST

ITEM	DESCRIPTION	QTY
1	Core & coil assemble	1
2	Tank Cover	1
3	Pressure Relief Device	1
4	Grounding Terminal	2
5	Marking On The Tank	1
6	Nameplate	1
7	Mounting Lug	2
8	Lifting Lug	2
9	Fastening Ring	1
10	HV Bushing	2
11	LV Bushing	3
12	Transformer Oil	
13	Grounding Strap	1
14	PCB Free	1
15	Electrical Connection Of The Cover To The Tank	1
16	Tap Changer	1

REMARK	SUBAREA	ALTERATION NO.	SIGNATION	DATE
DESIGN	MIKE W	VERIFY	IRIS J	
CHECK	ELLE W	APPROVE	SAM S	
CRAFT				
STANDARDIZE	CSA	DATE	2023.11.27	

D-50/7.2-0.6

DWG:
D50-20231127-01

QTY	WEIGHT	SCALE	A/O


JZP
POWER TRANSFORMER

Unit: inch

Ø0.16



SINGLE PHASE POLE
MOUNTED TRANSFORMER

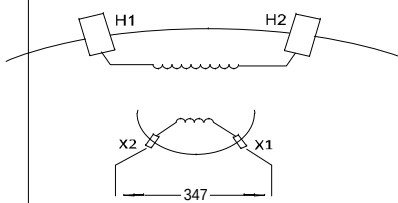1	PH.	50	kVA	SERIAL NO.	
IMPEDANCE AT 85°C			%	PRODUCT NO.	
BIL	95 / 30	kV	TEMPERATURE RISE	65°C	
HV.	7200	V	CONDUCTOR MATERIAL	CU	
LV.	347/600Y	V	FREQUENCY	60 Hz	
POLARITY			ADDITIVE	TYPE OF OIL	FR3
STANDARD PER CSA C 2.1				< 1PPM PCB	
			VOL OF OIL:		
			TOTAL MASS:		
			DATE OF MFG.		

JIEZOU TRANSFORMER

www.jiezoupower.com

3.15

3.54

3.94