


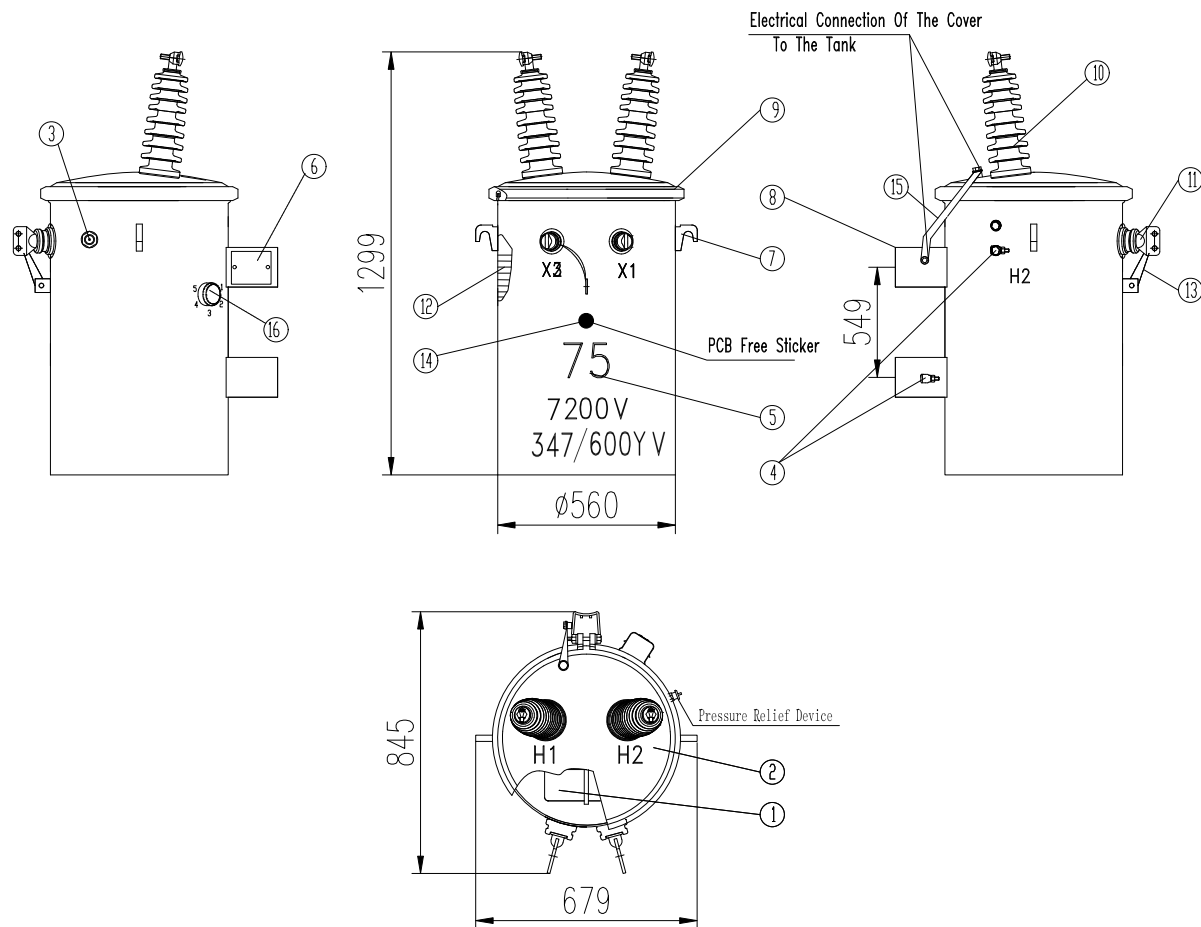

NOTE: Stainless steel Oil tank

TECHNICAL DATA

RATING	75kVA
PRIMARY VOLTAGE(V)	7200
SECONDARY VOLTAGE(V)	347 / 600Y
INSULATION LEVEL(kV) H.V BIL	95
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	Ii6
CONDUCTOR	CU
INSULATING OIL	FR3
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	175W
NO LOAD LOSSES	820W
IMPEDANCE	4.0%
ALTITUDE	≤ 5500FEET
COLOR	ANSI 70
POLARITY	ADDITIVE

ITEM	WEIGHT
UNTANK WEIGHT	686 LBS
TOTAL OIL WEIGHT	265 LBS
TOTAL WEIGHT	1118 LBS

PARTS LIST

ITEM	DESCRIPTION	QTY
1	Core & coil assemble	1
2	Tank Cover	1
3	Pressure Relief Device	1
4	Grounding Terminal	2
5	Marking On The Tank	1
6	Nameplate	1
7	Mounting Lug	2
8	Lifting Lug	2
9	Fastening Ring	1
10	HV Bushing	2
11	LV Bushing	3
12	Transformer Oil	
13	Grounding Strap	1
14	PCB Free	1
15	Electrical Connection Of The Cover To The Tank	1
16	Tap Changer	1

REMARK	SUBMIT	ALTERATION NO.	SIGNATURE	DATE
DESIGN	MIKE W	VERIFY	IRIS J	
CHECK	ELLE W	APPROVE	SAM S	
CRAFT				
STANDARDIZE	CSA	DATE	2023.11.27	

D-75/7.2-0.6

JZP
POWER TRANSFORMER

DWG:

D75-20231127-01

QTY	WEIGHT	SCALE
		A/0

Unit: inch

Ø0.16



SINGLE PHASE POLE
MOUNTED TRANSFORMER

1

PH.

75

kVA

SERIAL NO.

IMPEDANCE AT 85°C

%

PRODUCT NO.

BIL

95 / 30

kV

TEMPERATURE RISE

65°C

HV.

7200

V

CONDUCTOR MATERIAL

CU

LV.

347/600Y

V

FREQUENCY

60 Hz

POLARITY


ADDITIVE

TYPE OF OIL

FR3

STANDARD PER CSA C 2.1

< 1PPM PCB

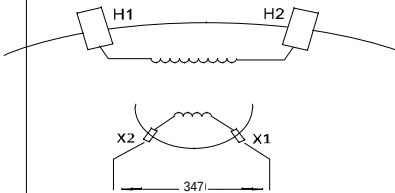

VOL OF OIL:

TOTAL MASS:

DATE OF MFG.

JIEZOU TRANSFORMER

www.jiezoupower.com

3.15

3.54

3.94