
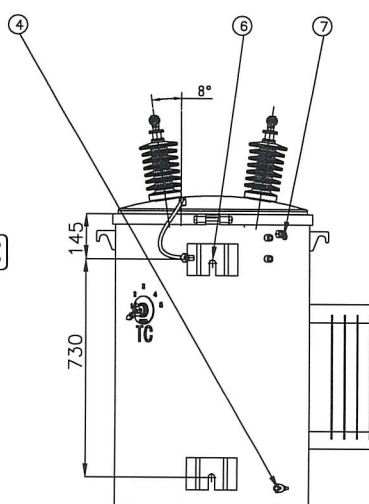
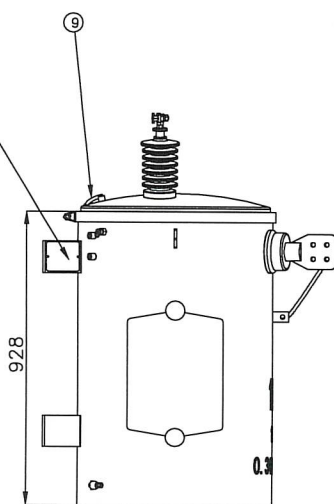
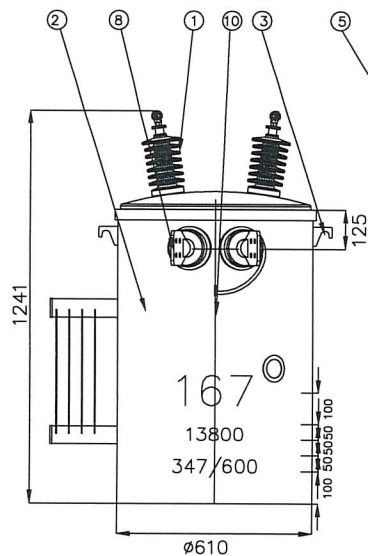



TECHNICAL DATA	
RATING	167kVA
PRIMARY VOLTAGE(V)	13800
SECONDARY VOLTAGE(V)	347-600
INSULATION LEVEL(kV) H.V BIL	95
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	II0
CONDUCTOR	AL
INSULATING OIL	45#
TEMPERATURE RISE	65°C
EFFICIENCY	99.05%
LOAD LOSS AT RATED VOLTAGE	2150W
NO LOAD LOSSES	270W
IMPEDANCE	>2.5%
ALTITUDE	≤1000m
COLOR	ANSI 70

ITEM	WEIGHT
UNTANK WEIGHT	360 kg
TOTAL OIL WEIGHT	185 kg
TOTAL WEIGHT	620 kg

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	HV BUSHING (15kV,55A)	2
2	TANK COVER	1
3	LIFTING LUG	2
4	GROUNDING COUNECTOR	2
5	NAMEPLATE	1
6	BOTTOM BRACKET	2
7	PRESSURE RELIEF VALVE	1
8	LV BUSHING(1.2kV 833A)	2
9	COPPER STRIP	2
10	GROUND STEEL PADS (TTC2)	3
11	PCB	1

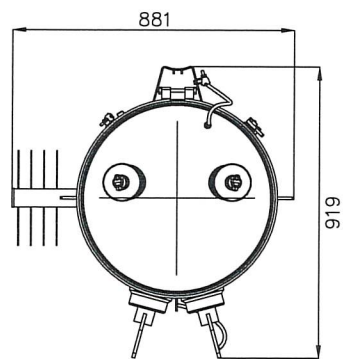


GROUNDING COUNECTOR
DETAIL




LV BUSHING TERMINAL

DETAIL




HV BUSHING TERMINAL

DETAIL



TYPE DL-167/13.8/0.347/0.6					DWG. NAME General Assembly Drawing			
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1	
Mike Wang	Iris Ji	Ella Wei		Sam	 JIEZOU POWER			REV. NO. 
DL-167-230810-01								

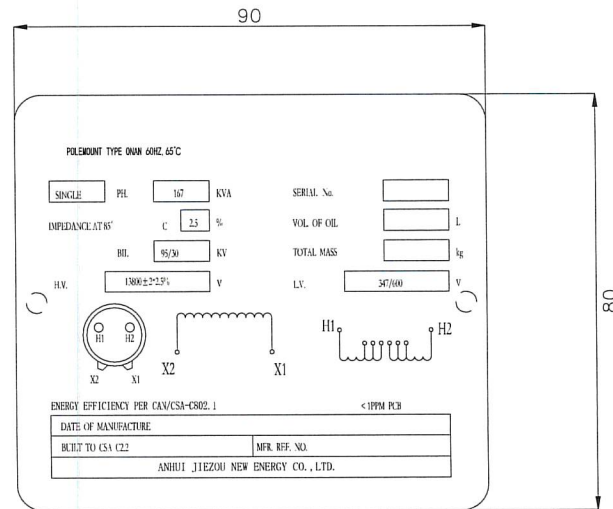

JP

CHANGE	TYPE		DWG. NAME			
	DL-167/13. 8/0. 347		Nameplate			
	FIRST ANGLE PROJECTION	SCALE	1	DRAWN	CHECKED	CHECKED
			5	Mike Wang	Iris Ji	Ella Wei
						APPROVED
						Sam
						REV. NO.
						1