


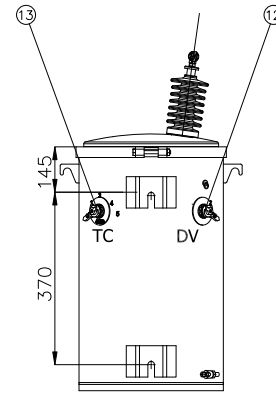
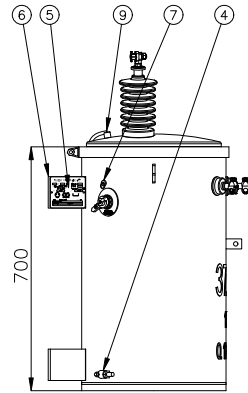


DWG. NO.


DL-10-230808-01

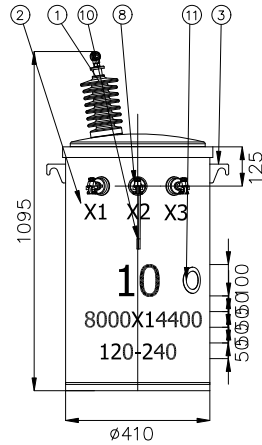


NAMEPLATE DETAIL




GROUNDING CONNECTOR DETAIL



LV BUSHING TERMINAL DETAIL



HV BUSHING TERMINAL DETAIL



TECHNICAL DATA

RATING	10kVA
PRIMARY VOLTAGE(V)	8000x14400
SECONDARY VOLTAGE(V)	120-240
INSULATION LEVEL(kV) H.V BIL	125
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	II0
CONDUCTOR	AL
INSULATING OIL	45#
TEMPERATURE RISE	65°C
EFFICIENCY	98.2%
LOAD LOSS AT RATED VOLTAGE	170W
NO LOAD LOSSES	50W
IMPEDANCE	>1%
ALTITUDE	≤1000m
COLOR	ANSI 70

ITEM	WEIGHT
UNTANK WEIGHT	72 KG
TOTAL OIL WEIGHT	160 Lbs
TOTAL WEIGHT	395 KG

PARTS LIST

ITEM	DESCRIPTION	QTY
1	HV BUSHING (25KV,25A)	1
2	TANK COVER	1
3	LIFTING LUG	2
4	GROUNDING CONNECTOR	2
5	NAMEPLATE	1
6	BOTTOM BRACKET	2
7	PRESSURE RELIEF VALVE	1
8	LV BUSHING(1.2KV 1/2)	3
9	COPPER STRIP	2
10	GROUND STEEL PADS (TTC2)	4
11	PCB	1
12	DV	1
13	TC	1
14	PCB	1

TYPE

DL-10/8+14.4/0.12/0.24

DRAWN

CHECKED

CHECKED

APPROVED

DWG. NAME

General Assembly Drawing

FIRST ANGLE PROJECTION

SCALE

1



REV. NO.



Approved: *Yulee Anderson*

DL-10-230808-01

90


80

POLEMOUNT TYPE ONAN 60HZ, 65°C

SINGLE	PH.	10	KVA	SERIAL No.	
IMPEDANCE AT 85°		1	%	VOL. OF OIL	L
BIL		125/30	KV	TOTAL MASS	kg
H.V.	8100x14400		V	L.V.	120/240 V



X3 X2 X1





ENERGY EFFICIENCY PER CAN/CSA-C802.1 <1PPM PCB

DATE OF MANUFACTURE	
BUILT TO CSA C22	MFR. REF. NO.
ANHUI JIEZOU NEW ENERGY CO., LTD.	

CHANGE		TYPE DL-10/8-14.4/0.12/0.24	DWG. NAME Nameplate				
	FIRST ANGLE PROJECTION	SCALE 1:5	DRAWN	CHECKED	CHECKED		APPROVED
			Mike Wang	Iris Ji	Ella Wei		Sam
							REV. NO. 1