



NAMEPLATE
DETAIL




GROUNDING COUNECTOR
DETAIL



LV BUSHING TERMINAL
DETAIL



HV BUSHING TERMINAL
DETAIL



TECHNICAL DATA	
RATING	10kVA
PRIMARY VOLTAGE(V)	8000x14400
SECONDARY VOLTAGE(V)	120-240
INSULATION LEVEL(kV) H.V BIL	125
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	II0
CONDUCTOR	AL
INSULATING OIL	45#
TEMPERATURE RISE	65°C
EFFICIENCY	98.2%
LOAD LOSS AT RATED VOLTAGE	170W
NO LOAD LOSSES	50
IMPEDANCE	>1%
ALTITUDE	≤1000m
COLOR	ANSI 70

ITEM	WEIGHT
UNTANK WEIGHT	72 Lbs
TOTAL OIL WEIGHT	160 Lbs
TOTAL WEIGHT	395 Lbs

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	HV BUSHING (25kV,25A)	2
2	TANK COVER	1
3	LIFTING LUG	2
4	GROUNDING COUNECTOR	2
5	NAMEPLATE	1
6	BOTTOM BRACKET	2
7	PRESSURE RELIEF VALVE	1
8	LV BUSHING(1.2kV 1/2)	3
9	COPPER STRIP	2
10	GROUND STEEL PADS (TTC2)	4
11	PCB	1
12	DV	1
13	TC	1
14	PCB	1

TYPE					DWG. NAME			
DL-10/8-14.4/0.12/0.24					General Assembly Drawing			
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1	
								REV. NO.

POLEMOUNT TYPE ONAN 60HZ, 65°C

SINGLE PH. 10 KVA

IMPEDANCE AT 85°C 1 %

BIL 125/30 KV


H.V. 8000x14400 V

SERIAL No.

VOL. OF OIL L

TOTAL MASS kg

L.V. 120/240 V

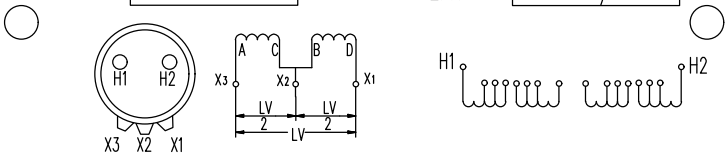

ENERGY EFFICIENCY PER CAN/CSA-C802.1 < 1PPM PCB

DATE OF MANUFACTURE	
BUILT TO CSA C2.2	MFR. REF. NO.

CHANGE

TYPE

DWG. NAME
Nameplate

FIRST ANGLE
PROJECTION

SCALE

1

5

DRAWN

CHECKED

CHECKED

APPROVED

REV.
NO.

1