


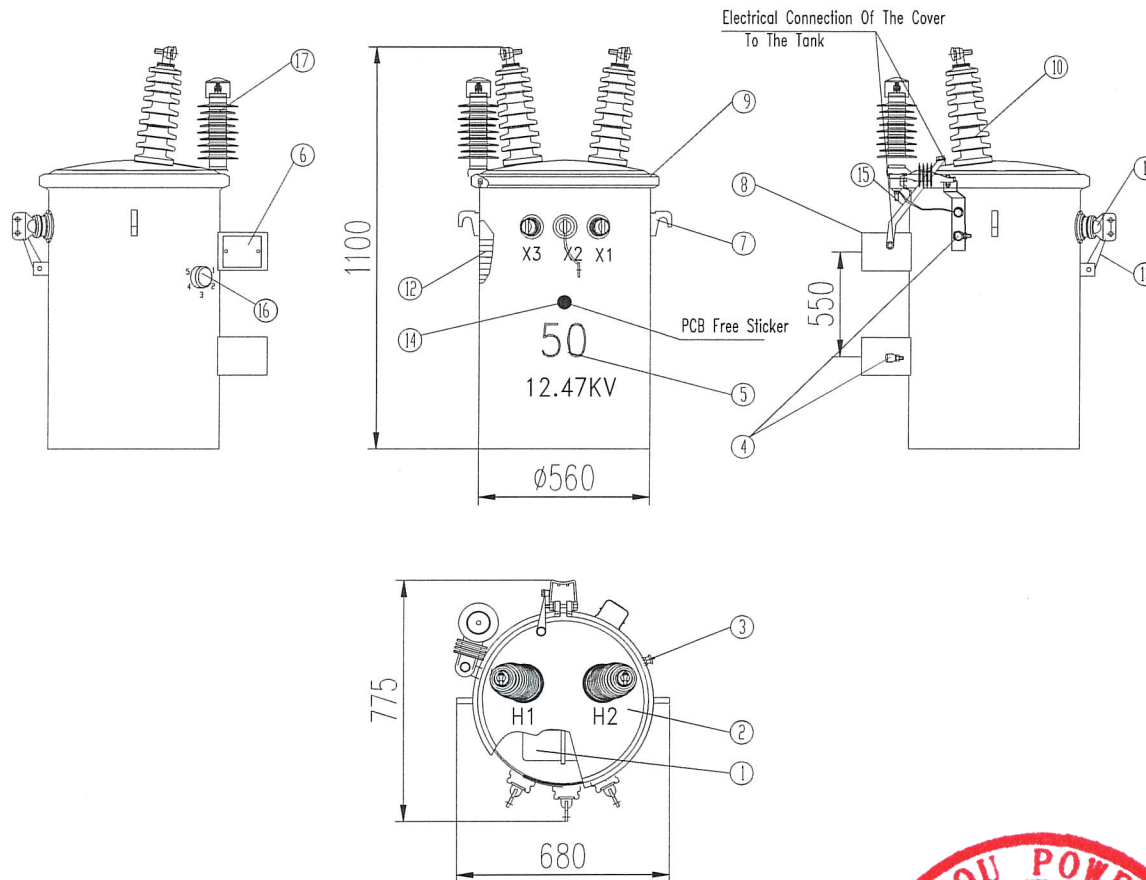

TECHNICAL DATA

RATING	50kVA
PRIMARY VOLTAGE(V)	12470
SECONDARY VOLTAGE(V)	120/240
INSULATION LEVEL(kV) H.V BIL	95
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	Ii6
CONDUCTOR	AL
INSULATING OIL	MINERAL NO PCB
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	670W
NO LOAD LOSSES	45W
IMPEDANCE	≥1.5%
ALTITUDE	≤1000m
COLOR	ANSI 70

ITEM	WEIGHT
UNTANK WEIGHT	395 LBS
TOTAL OIL WEIGHT	205 LBS
TOTAL WEIGHT	715 LBS

PARTS LIST

ITEM	DESCRIPTION	QTY
1	Core & coil assemble	1
2	Tank Cover	1
3	Pressure Relief Device	1
4	Grounding Terminal	2
5	Marking On The Tank	1
6	Nameplate	1
7	Mounting Lug	2
8	Lifting Lug	2
9	Fastening Ring	1
10	HV Bushing	2
11	LV Bushing	3
12	Transformer Oil	
13	Grounding Strap	1
14	PCB Free	1
15	Electrical Connection Of The Cover To The Tank	1
16	Tap Changer	1
17	HV Arrester	1

DL-50/12.47-0.24

DWG: DL50-240108-02

QTY	WEIGHT	SCALE
		B/0

JZP

DESIGN	MIKE W	VERIFY	IRIS J	DATE
CHECK	ELI	APPROVE	SAM S	
STANDARDIZE		DATE	2024.1.6	



SINGLE PHASE POLE MOUNTED TRANSFORMER

1 PH. 50 kVA SERIAL NO.

IMPEDANCE AT 85°C % PRODUCT NO.

BIL 95 / 30 kV TEMPERATURE RISE 65°C


HV. 12470 V CONDUCTOR MATERIAL AL

LV. 120 / 240 V FREQUENCY 60 Hz

POLARITY ADDITIVE TYPE OF OIL MINERAL



STANDARD PER CSA C 2.1

< 1PPM PCB

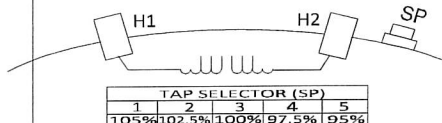

VOL OF OIL:

TOTAL MASS:



DATE OF MFG.

JIEZOU POWER
www.jiezoupower.com




Ø0.16

3.94

3.15

3.54

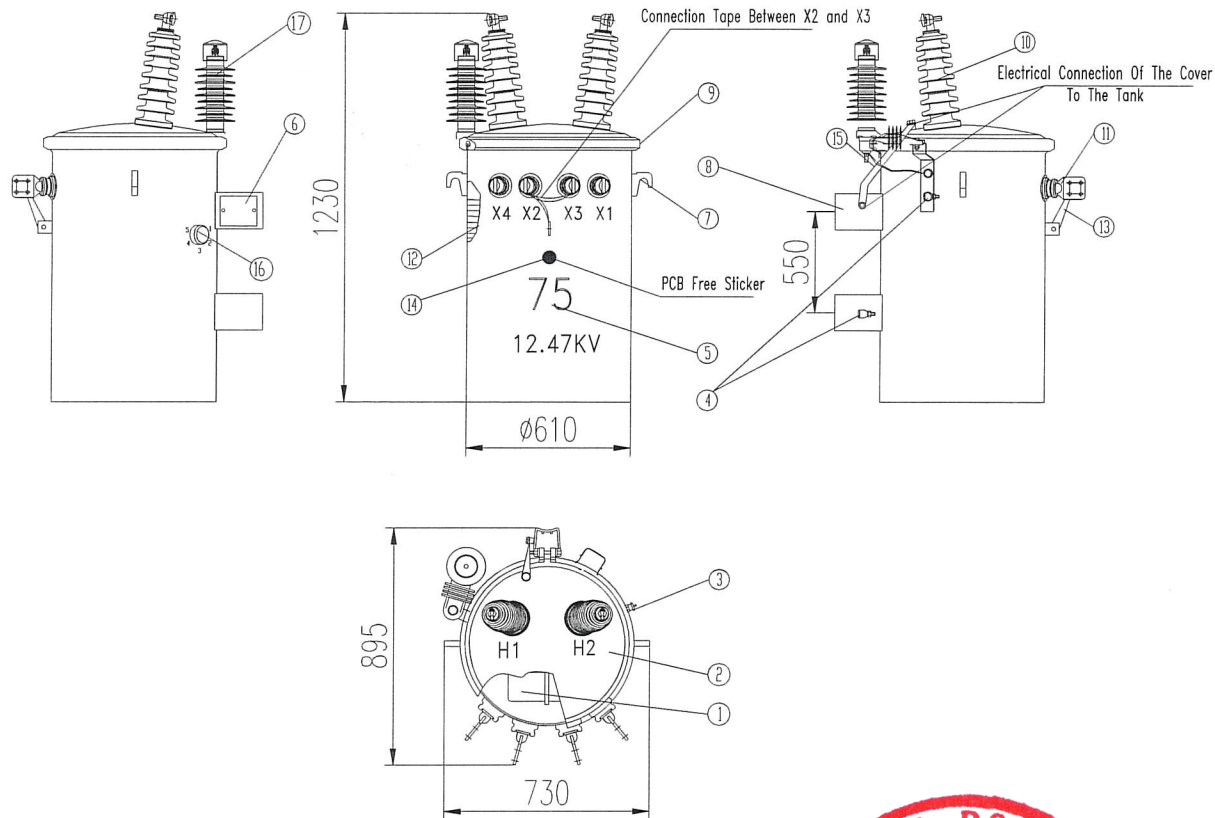

TECHNICAL DATA	
RATING	75kVA
PRIMARY VOLTAGE(V)	12470
SECONDARY VOLTAGE(V)	120/240
INSULATION LEVEL(kV) H.V BIL	95
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	Ii6
CONDUCTOR	AL
INSULATING OIL	MINERAL NO PCB
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	880W
NO LOAD LOSSES	62W
IMPEDANCE	≥1.5%
ALTITUDE	≤1000m
COLOR	ANSI 70

ITEM	WEIGHT
UNTANK WEIGHT	595 LBS
TOTAL OIL WEIGHT	278 LBS
TOTAL WEIGHT	1067 LBS

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	Core & coil assemble	1
2	Tank Cover	1
3	Pressure Relief Device	1
4	Grounding Terminal	2
5	Marking On The Tank	1
6	Nameplate	1
7	Mounting Lug	2
8	Lifting Lug	2
9	Fastening Ring	1
10	HV Bushing	2
11	LV Bushing	4
12	Transformer Oil	
13	Grounding Strap	1
14	PCB Free	1
15	Electrical Connection Of The Cover To The Tank	1
16	Tap Changer	1
17	HV Arrester	1



REMARK	REVISION	DATE	SIGNATURE	DATE
DESIGN	W	VER	IRIS J	
CHECK	W	APPROVE	SAM S	
STANDARDIZE		DATE	2024.1.6	

DL-75/12.47-0.24

DWG: DL 75-240108-03

QTY	WEIGHT	SCALE
		B/D

[Handwritten signature]

JZP
SINCE 1989 FROM USA



SINGLE PHASE POLE MOUNTED TRANSFORMER

1 PH. 75 kVA SERIAL NO.

IMPEDANCE AT 85°C % PRODUCT NO.

BIL 95 / 30 kV TEMPERATURE RISE 65°C

HV. 12470 V CONDUCTOR MATERIAL AL

LV. 120 / 240 V FREQUENCY 60 Hz

POLARITY ADDITIVE TYPE OF OIL MINERAL

STANDARD PER CSA C 2.1


< 1PPM PCB



VOL OF OIL:


TAP SELECTOR (SP)				
1	2	3	4	5
105%	102.5%	100%	97.5%	95%

TOTAL MASS:



DATE OF MFG.

JIEZOU POWER
www.jiezoupower.com

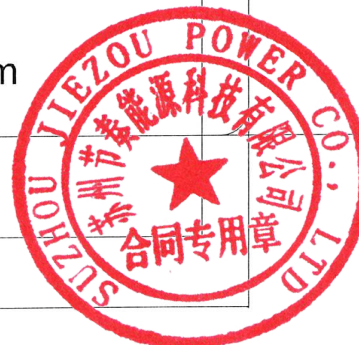

Ø0.16

3.94

3.15

3.54