




TECHNICAL DATA	
RATING	37.5kVA
PRIMARY VOLTAGE(V)	12470
SECONDARY VOLTAGE(V)	120/240
INSULATION LEVEL(kV) H.V BIL	95
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	Ii6
CONDUCTOR	AL
INSULATING OIL	MINERAL NO PCB
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	570W
NO LOAD LOSSES	36W
IMPEDANCE	≥1.5%
ALTITUDE	≤1000m
COLOR	ANSI 70

ITEM	WEIGHT
UNTANK WEIGHT	320 LBS
TOTAL OIL WEIGHT	161 LBS
TOTAL WEIGHT	580 LBS

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	Core & coil assemble	1
2	Tank Cover	1
3	Pressure Relief Device	1
4	Grounding Terminal	2
5	Marking On The Tank	1
6	Nameplate	1
7	Mounting Lug	2
8	Lifting Lug	2
9	Fastening Ring	1
10	HV Bushing	2
11	LV Bushing	3
12	Transformer Oil	
13	Grounding Strap	1
14	PCB Free	1
15	Electrical Connection Of The Cover To The Tank	1
16	Tap Changer	1
17	HV Arrester	1

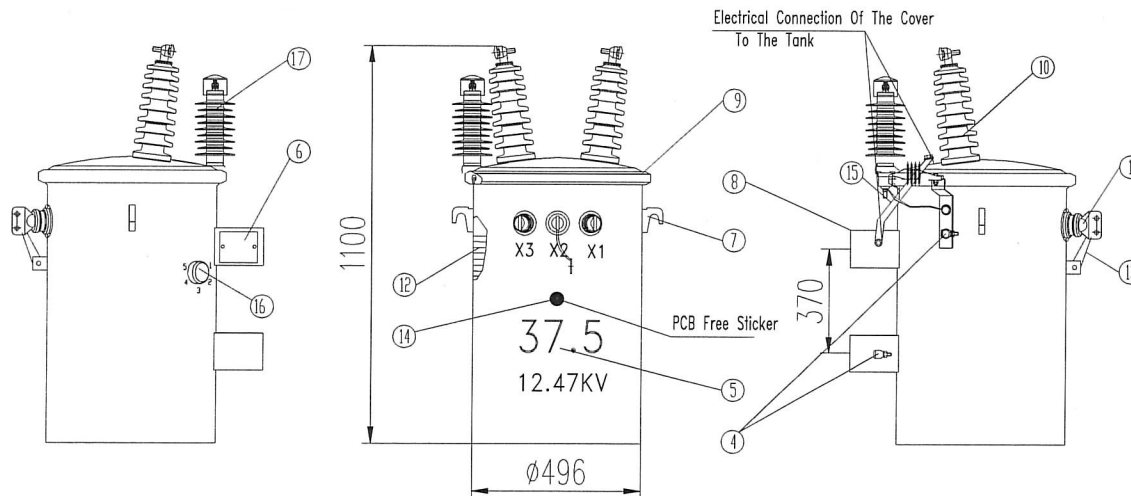

REMARK	SUBREK	ALTERATION NO.	SIGNATURE	DATE
DESIGN	MIKE W	VERIFY	IRIS J	
CHECK	ELLA W	APPROVE	SAM S	
CRAFT				
STANDARDIZE		DATE	2024.1.6	


DL-37.5/12.47-0.24		DWG: DL37.5-240108-01	
QTY	WEIGHT	SCALE	B/O
Sip		JZP	



SINGLE PHASE POLE
MOUNTED TRANSFORMER

1 PH. 37.5 kVA SERIAL NO.
IMPEDANCE AT 85°C % PRODUCT NO.
BIL 95 / 30 kV TEMPERATURE RISE 65°C
HV. 12470 V CONDUCTOR MATERIAL AL
LV. 120 / 240 V FREQUENCY 60 Hz

POLARITY ADDITIVE TYPE OF OIL MINERAL
STANDARD PER CSA C 2.1 < 1PPM PCB

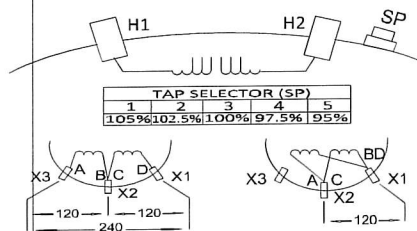

VOL OF OIL:
TOTAL MASS:
DATE OF MFG.

JIEZOU POWER
www.jiezoupower.com

