

TECHNICAL DATA

RATING	75kVA
PRIMARY VOLTAGE(V)	24940 DELTA
SECONDARY VOLTAGE(V)	480/277
INSULATION LEVEL(kV) H.V BIL	150
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	II0
CONDUCTOR	AL
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
EFFICIENCY	98.94%
LOAD LOSS AT RATED VOLTAGE	1050W
NO LOAD LOSSES	160W
IMPEDANCE	>2.3%
ALTITUDE	≤1000m
COLOR	ANSI 70
POLARITY	ADDITIVE

ITEM	WEIGHT
UNTANK WEIGHT	508 Lbs
TOTAL OIL WEIGHT	262 Lbs
TOTAL WEIGHT	1020 Lbs

PARTS LIST

ITEM	DESCRIPTION	QTY
1	HV BUSHING (35KV,25A)	2
2	TANK COVER	1
3	RADIATOR PJ-400-4/300	1
4	LIFTING LUG	2
5	GROUNDING COUNECTOR	2
6	NAMEPLATE	1
7	BOTTOM BRACKET	2
8	PRESSURE RELIEF VALVE	1
9	LV BUSHING(1.2KV 1/2)	2
10	COPPER STRIP	2
11	GROUND STEEL PADS (TTC2)	4
12	Non-PCB Sticker	1
13	TAP CHANGER	1

DWG. NAME

General Assembly Drawing

TYPE

DL-75/24.94/277

DRAWN

Mike W

CHECKED

Ella W

CHECKED

Iris J

APPROVED

Sam S

FIRST ANGLE

PROJECTION



SCALE

1

REV.
NO.


0

DL-75-231030-01

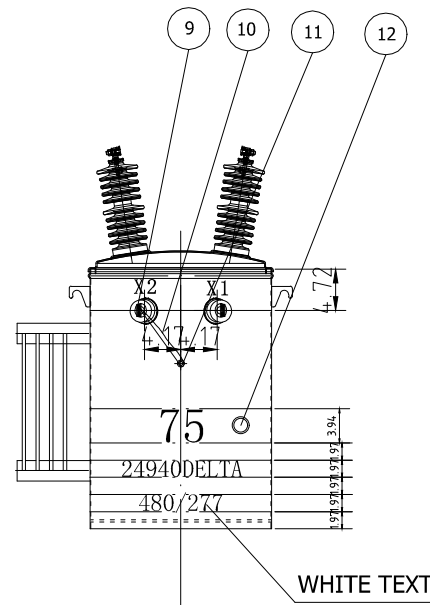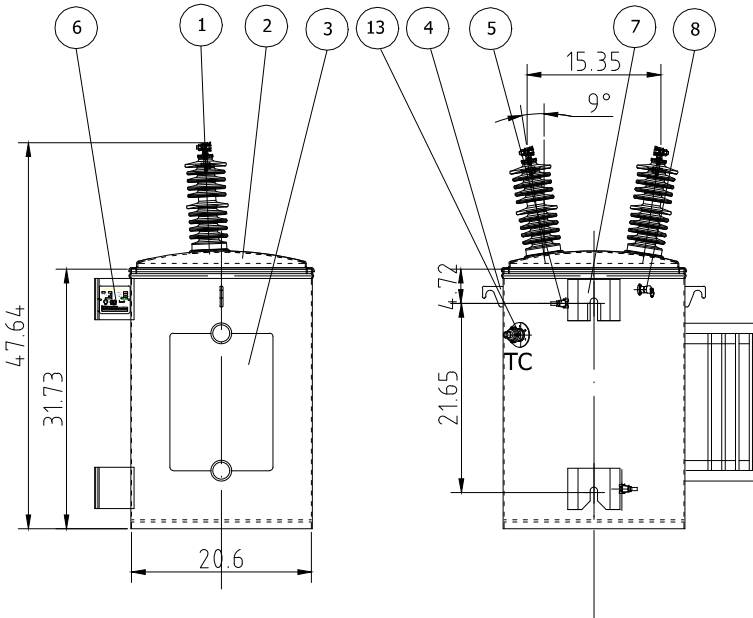JZP
SINCE 1989 FROM USA


LV BUSHING TERMINAL

DETAIL



HV BUSHING TERMINAL

DETAIL



GROUNDING COUNECTOR

DETAIL

