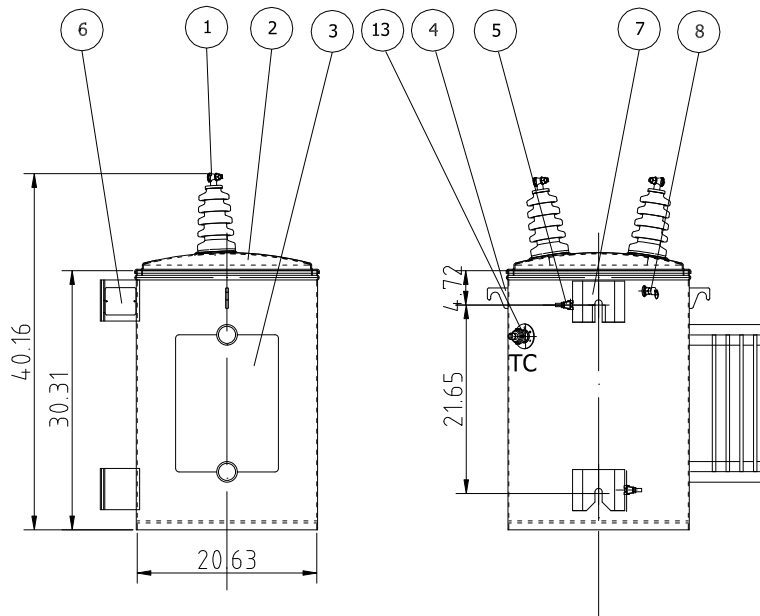
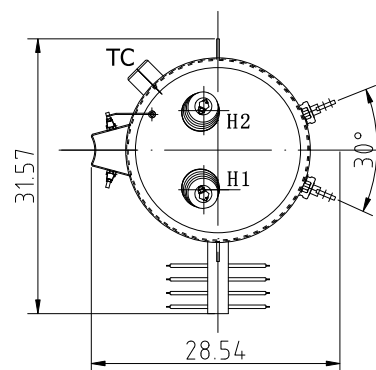

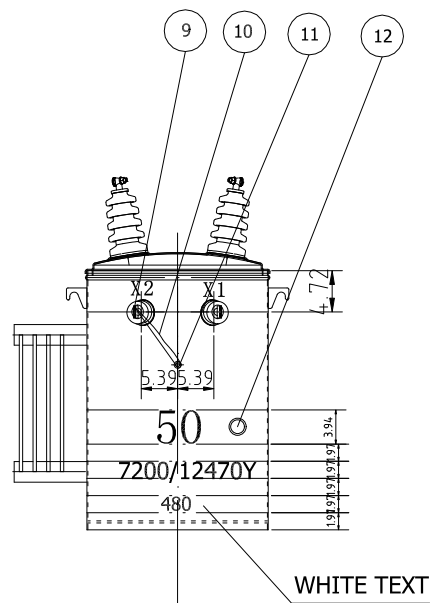

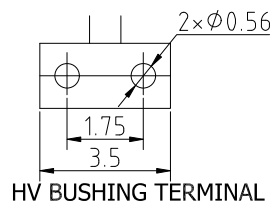



NAMEPLATE
DETAILGROUNDING COUNECTOR
DETAILLV BUSHING TERMINAL
DETAILHV BUSHING TERMINAL
DETAIL

TECHNICAL DATA	
RATING	50kVA
PRIMARY VOLTAGE(V)	7200/12470Y
SECONDARY VOLTAGE(V)	480
INSULATION LEVEL(kV) H.V BIL	95
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	II0
CONDUCTOR	AL
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
EFFICIENCY	98.84%
LOAD LOSS AT RATED VOLTAGE	550W
NO LOAD LOSSES	145W
IMPEDANCE	>2%
ALTITUDE	≤1000m
COLOR	ANSI 70
POLARITY	ADDITIVE

ITEM	WEIGHT
CORE WEIGHT	170 Kg
TOTAL OIL WEIGHT	130 L
TOTAL WEIGHT	340 Kg

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	HV BUSHING (15kv,55A)	2
2	TANK COVER	1
3	RADIATOR PJ-400-4/300	1
4	LIFTING LUG	2
5	GROUNDING CONNECTOR	2
6	NAMEPLATE	1
7	MOUNTING BRACKET	2
8	PRESSURE RELIEF VALVE	1
9	LV BUSHING(1.2kv, 208A)	2
10	COPPER STRIP	2
11	GROUND STEEL PADS (TTC2)	2
12	Non-PCB Sticker	1
13	TAP CHANGER	1

TYPE

D-M-50/7.2/0.48

DRAWN CHECKED

MIKE W ELLA W IRIS J

APPROVED

SAM S

DWG. NAME

General Assembly Drawing

FIRST ANGLE
PROJECTION

SCALE

1

JZP

SINCE 1989 FROM USA

REV.
NO.

0



SINGLE PHASE POLE
MOUNTED TRANSFORMER

SINGLE	PH.	50	kVA	SERIAL NO.
--------	-----	----	-----	------------

IMPEDANCE AT 85°C		%	PRODUCT NO.
-------------------	--	---	-------------

BIL	95/30	kV	TEMPERATURE RISE	65°C
-----	-------	----	------------------	------

HV.	7200/12470Y	V	TYPE OF OIL	MINERAL OIL
-----	-------------	---	-------------	-------------

LV.	480	V	FREQUENCY	60HZ
-----	-----	---	-----------	------




POLARITY	ADDITIVE	CONDUCTOR MATERIAL	AL
----------	----------	--------------------	----



ENERGY EFFICIENCY PER CAN/CSA-C802.1

< 1PPM PCB

% HV	TAPS
105%	1/A
102.5%	2/B
100%	3/C
97.5%	4/D
95%	5/E

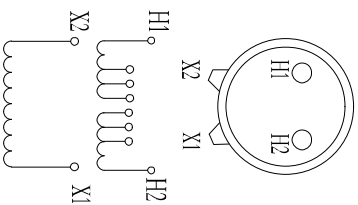

VOL OF OIL:

TOTAL MASS:

DATE OF MFG.

www.jiezoupower.com

