


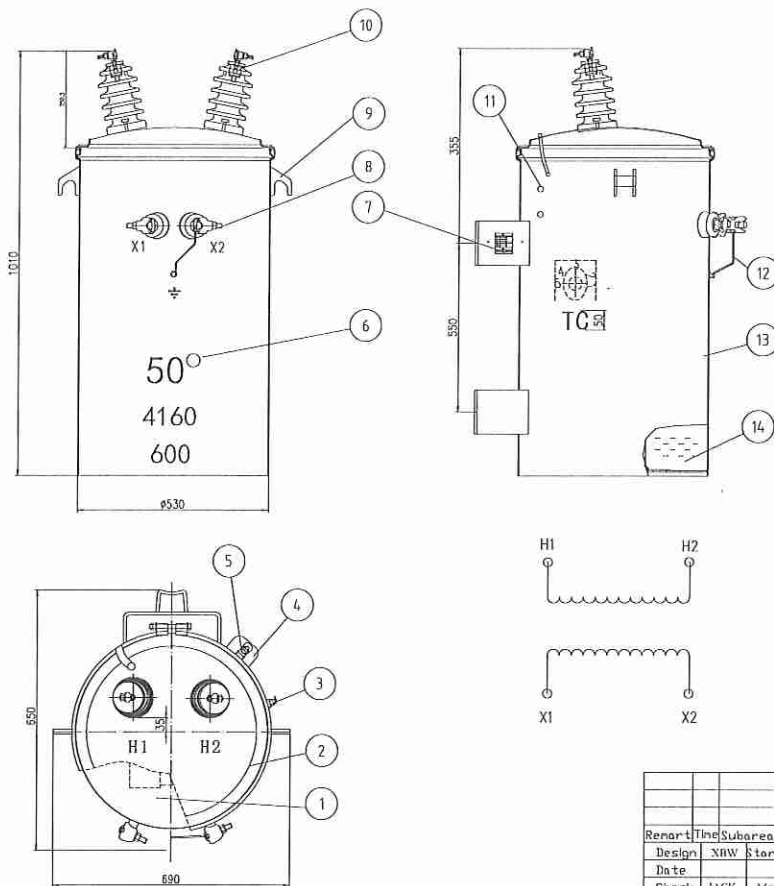

TECHNICAL DATA	
RATING	50kVA
PRIMARY VOLTAGE(V)	4160
SECONDARY VOLTAGE(V)	600
INSULATION LEVEL(kV)H.V. BIL	60
INSULATION LEVEL(kV)L.V. BIL	30
FREQUENCY	60Hz
VECTOR GROUP	LI0
CONDUCTOR	ALUMINUM
POSITION OFF-LOAD TAP CHANGER	±2×2.5%
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	500W
NO LOAD LOSSES	135W
IMPEDANCE	2.0%--3.0%
ALTITUDE	< 1000m
COLOR	MUNSELL 5BG 7.0/4 GRAY
STOCK NO.	

ITEM	WEIGHT
UNTANK WEIGHT	388Lbs
TOTAL OIL WEIGHT	232Lbs
TOTAL WEIGHT	720Lbs

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	Core&Coil Assemble	1
2	Tank Cover	1
3	Pressure Relief Device	1
4	Grounding Terminal	3
5	Tap Changer	1
6	Mark	1
7	Nameplate	1
8	LV Bushing	2
9	Lifting Hook	2
10	HV Bushing	2
11	Lightning Arrester Nut	4
12	Copper Strip	1
13	Tank	1
14	Transformer Oil	

Revised					
Design	XRW	Standardize			
Date					
Check	JACK	Verify	IRIS		
Craft		Approve	SAM		

DL-50/4.16/0.6
Outling Drawing

JZP
POWER TRANSFORMER

Randy Wamaker
Randy Wamaker - Powerworth




IMPEDANCE AT 85°C % PRODUCT NO.

HV	4160	V CONDUCTOR MATERIAL	AL
----	------	----------------------	----

☐ POLARITY ☐ ADDITIVE ☐ TYPE OF OIL ☐ MINERAL ☐

STANDARD PER CSA C 2.1 < 1PPM PCB

TOTAL MASS: 

JIEZOU POWER

www.jiezoupower.com

Raymond W. Wagoner
Raymond Wagoner - Power World