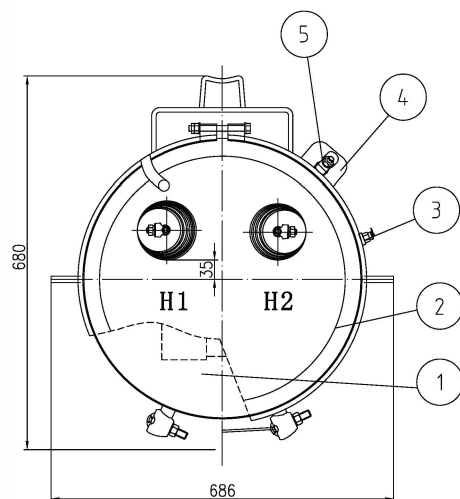
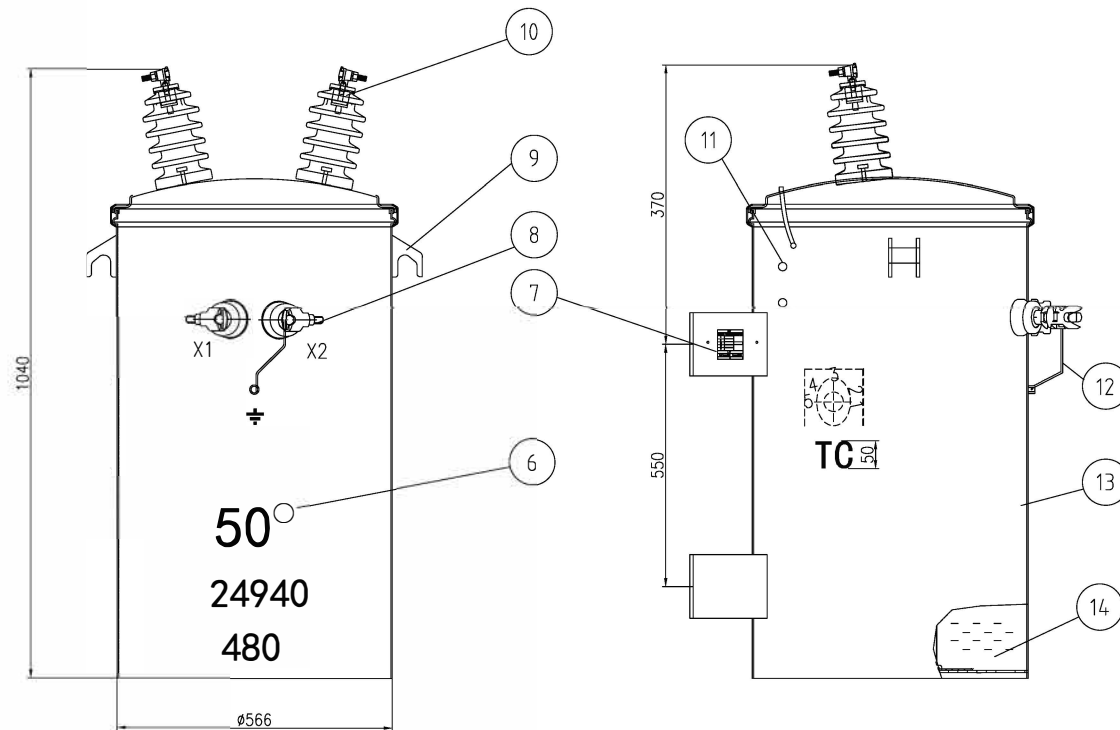


TECHNICAL DATA

RATING	50kVA
PRIMARY VOLTAGE(V)	24940
SECONDARY VOLTAGE(V)	480
INSULATION LEVEL(kV)H.V BIL	125
INSULATION LEVEL(kV)L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	LI0
CONDUCTOR	ALUMINUM
POSITION OFF-LOAD TAP CHANGER	$\pm 2 \times 2.5\%$
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	500W
NO LOAD LOSSES	135W
IMPEDANCE	2.0%--3.0%
ALTITUDE	< 1000m
COLOR	MUNSELL 5BG 7.0/.4 GRAY
STOCK NO.	

ITEM	WEIGHT
UNTANK WEIGHT	424Lbs
TOTAL OIL WEIGHT	243Lbs
TOTAL WEIGHT	783Lbs

PARTS LIST

ITEM	DESCRIPTION	QTY
1	Core&Coil Assemble	1
2	Tank Cover	1
3	Pressure Relief Device	1
4	Grounding Terminal	3
5	Tap Changer	1
6	Mark	1
7	Nameplate	1
8	LV Bushing	2
9	Lifting Hook	2
10	HV Bushing	2
11	Lightning Arrester Nut	4
12	Copper Strip	1
13	Tank	1
14	Transformer Oil	

Remant	Time	Subarea	Signature	Date
Design	XBW	Standardiza		
Date				
Check	JACK	Verify	IRIS	
Craft		Approve	SAM	

DL-50/24.94/0.48
Outling Drawing

JZP
POWER TRANSFORMER



SINGLE PHASE POLE
MOUNTED TRANSFORMER

1 PH 50 kVA SERIAL NO.

IMPEDANCE AT 85°C % PRODUCT NO.


BIL 125/30 kV TEMPRATURE RISE 65°C

HV 24940 V CONDUCTOR MATERIAL AL

LV 480 V FREQUENCY 60HZ

☐ POLARITY ADDITIVE ☐ TYPE OF OIL MINERAL ☐


STANDARD PER CSA C 2.1 < 1PPM PCB

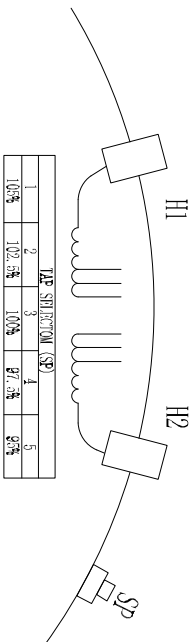

VOL OF OIL:

TOTAL MASS:

DATE OF MFG.

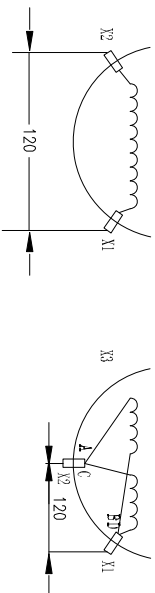

JIEZOU POWER

www.jiezoupower.com