
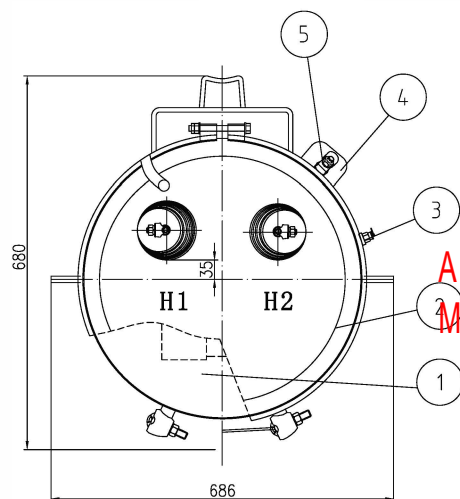


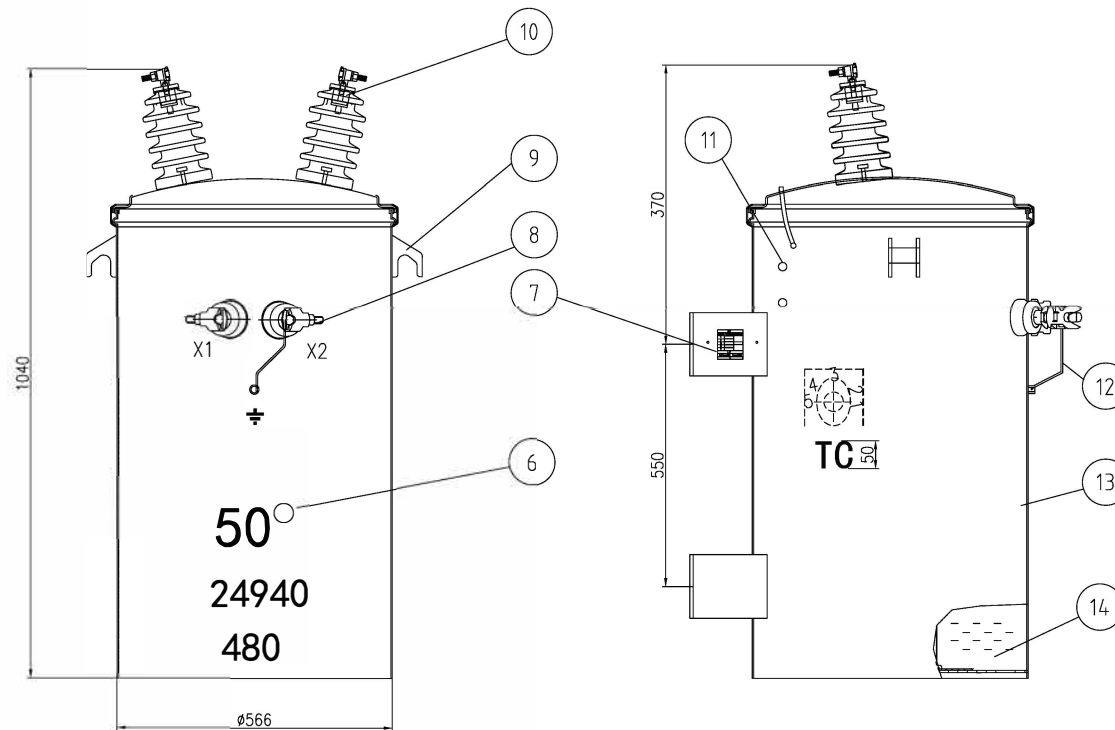

Approved:
Manufacturing May Proceed

Remi Label

Remant	Time	Subarea	Signature	Date
Design	XBW	Standardiza		
Date				
Check	JACK	Verify	IRIS	
Craft		Approve	SAM	

DL-50/24.94/0.48
Outling Drawing

JZP
POWER TRANSFORMER

TECHNICAL DATA

RATING	50kVA
PRIMARY VOLTAGE(V)	24940
SECONDARY VOLTAGE(V)	480
INSULATION LEVEL(kV)H.V BIL	125
INSULATION LEVEL(kV)L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	LI0
CONDUCTOR	ALUMINUM
POSITION OFF-LOAD TAP CHANGER	$\pm 2 \times 2.5\%$
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	500W
NO LOAD LOSSES	135W
IMPEDANCE	2.0%--3.0%
ALTITUDE	< 1000m
COLOR	MUNSELL 5BG 7.0/.4 GRAY
STOCK NO.	

ITEM	WEIGHT
UNTANK WEIGHT	424Lbs
TOTAL OIL WEIGHT	243Lbs
TOTAL WEIGHT	783Lbs

PARTS LIST

ITEM	DESCRIPTION	QTY
1	Core&Coil Assemble	1
2	Tank Cover	1
3	Pressure Relief Device	1
4	Grounding Terminal	3
5	Tap Changer	1
6	Mark	1
7	Nameplate	1
8	LV Bushing	2
9	Lifting Hook	2
10	HV Bushing	2
11	Lightning Arrester Nut	4
12	Copper Strip	1
13	Tank	1
14	Transformer Oil	



SINGLE PHASE POLE
MOUNTED TRANSFORMER

1 PH 50 kVA SERIAL NO.

IMPEDANCE AT 85°C % PRODUCT NO.


BIL 125/30 kV TEMPRATURE RISE 65°C

HV 24940 V CONDUCTOR MATERIAL AL

LV 480 V FREQUENCY 60HZ

☐ POLARITY ADDITIVE ☐ TYPE OF OIL MINERAL ☐


STANDARD PER CSA C 2.1 < 1PPM PCB

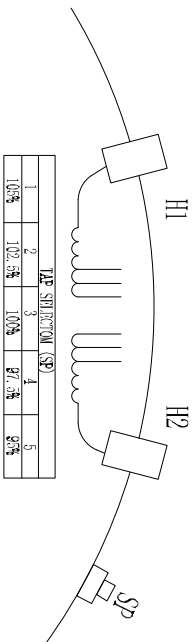

VOL OF OIL:

TOTAL MASS:

DATE OF MFG.

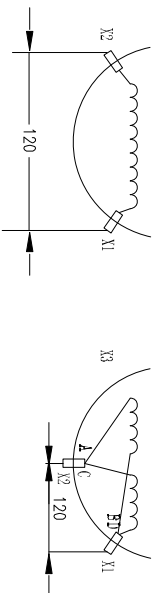

JIEZOU POWER

www.jiezoupower.com